

MINI RESISTOR

P PROTECTRON

Small connector incorporating Resistance of high reliability, for applications requiring Signal termination like in Controller Area networks, and for dummy loads.


SPECIFICATION

MATERIAL: Nylon 6


TERMINAL: Zinc Alloy/ Tin plated

RESISTANCE RANGE: 121 ohms, ½W 1% or as per customer specifications

TEMPERATURE RANGE :-40°C to +85°C





Dimensions in mm

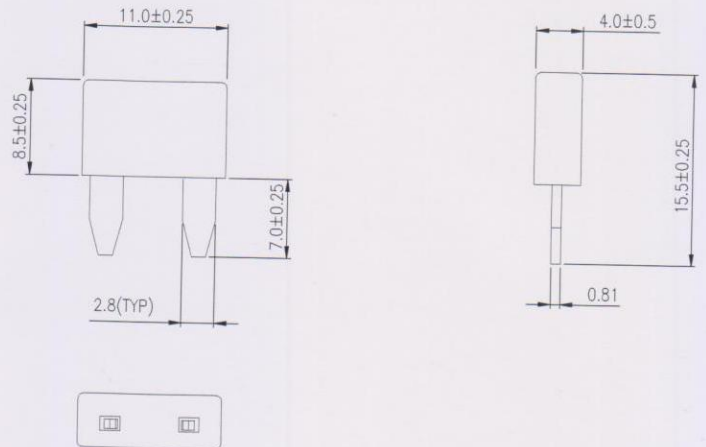

BUILT-IN 3 WAY DIODE

Small connector incorporating large capacity Diode of high reliability and excellent heat radiation for the applications requiring rectifying and to avoid reverse polarity function.

Dimensions in mm

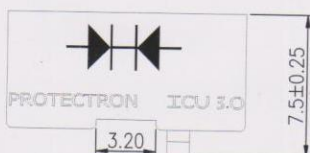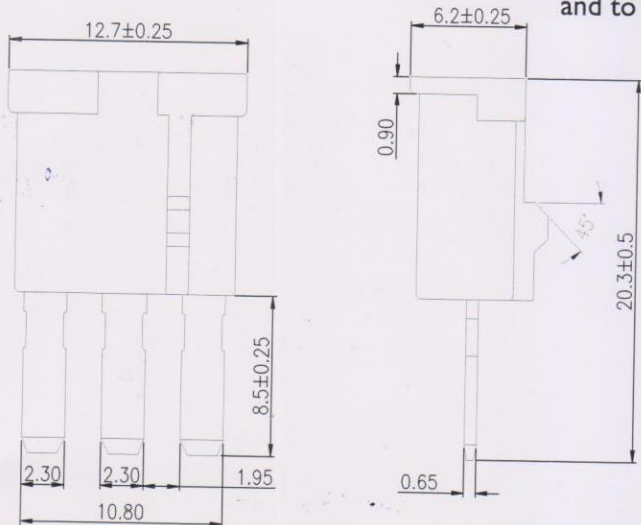

DIODE CONNECTION CIRCUIT

