


LOW PROFILE MINI BLADE FUSES



Low Profile (LP) Mini Blade Fuses are more miniature than the standard Mini Blade Fuses. This allows for even more fuses to be accommodated in the same space. In addition, the LP Mini Fuses has been designed to mate with tuning fork terminals, this allows for economic savings on both the weight and material in the fuse box. With easy identification and replaceability these fuses are suited for a wide variety of low voltage electronic applications. Manufactured indigenously on fully automatic production lines.



Interrupting Rating: 1000A @ 58V DC
 Production Capacity: 20Million Pcs/year
 Color Coding: Blade fuses are color coded for easy amperage identification

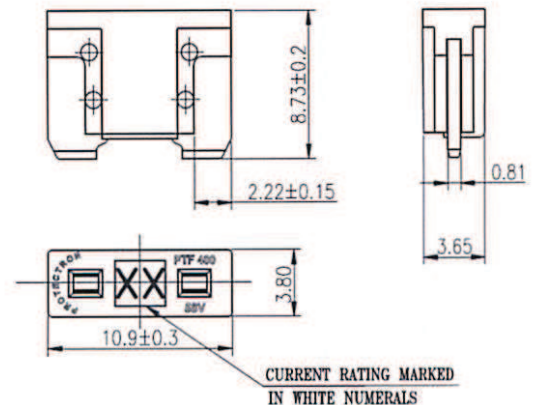

ORDERING INFORMATION

PTF 400 In
 In = NOMINAL CURRENT(3A TO 30A)

Part number	Current Rating(Amps)	Housing Color	Rated Voltage (DC)
PTF 400 3A	3	VIOLET	58
PTF 400 4A	4	PINK	58
PTF 400 5A	5	TAN	58
PTF 400 7.5A	7.5	BROWN	58
PTF 400 10A	10	RED	58
PTF 400 15A	15	BLUE	58
PTF 400 20A	20	YELLOW	58
PTF 400 25A	25	NATURAL	58
PTF 400 30A	30	GREEN	58

TIME CURRENT CHARACTERISTICS

% of rating	Opening Time	
	Min	Max
110	100 hrs	-
135	750ms	600s
160	250ms	50s
200	150ms	5s
350	40ms	0.5s
600	20ms	0.1s

Certified
 ISO 9001
 ISO 14001
 TS 16949



Protectron Electromech (P) Ltd
 No.44, 29th Cross, 7th Main, Banashankari Industrial Layout,
 Banashankari 2nd stage, Bangalore- 560 070
 Ph.: +91-80-26716005/ 04/03/02/01 www.protectron.in