



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : SOCKET ASSEMBLY FOR DIA 1.50mm CONNECTOR JACK

PART NO: P8040A1X-32  
X=TYPE OF PLATING

RoHS



## PHYSICAL

### MATERIAL

OUTER SLEEVE BODY : BRASS, MACHINED, GOLD PLATED  
INNER CONTACT CLIP : COPPER ALLOY, GOLD PLATED  
PACKAGING TYPE : BULK PACKING

## ELECTRICAL

CONTACT RESISTANCE : 5m OHMS MAX  
VOLTAGE RATING : 250V AC  
CURRENT RATING : 4A

## MECHANICAL DATA

INSERTION FORCE : 3.5 N (350 Gms.) Nominal  
EXTRACTION FORCE : 1N (100 Gms.) Nominal  
LIFE CYCLE : 500 CYCLES

## ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25°C TO +70°C



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : SOCKET ASSEMBLY FOR DIA 1.50mm CONNECTOR JACK

PART NO: P8040A1X-32  
X=TYPE OF PLATING

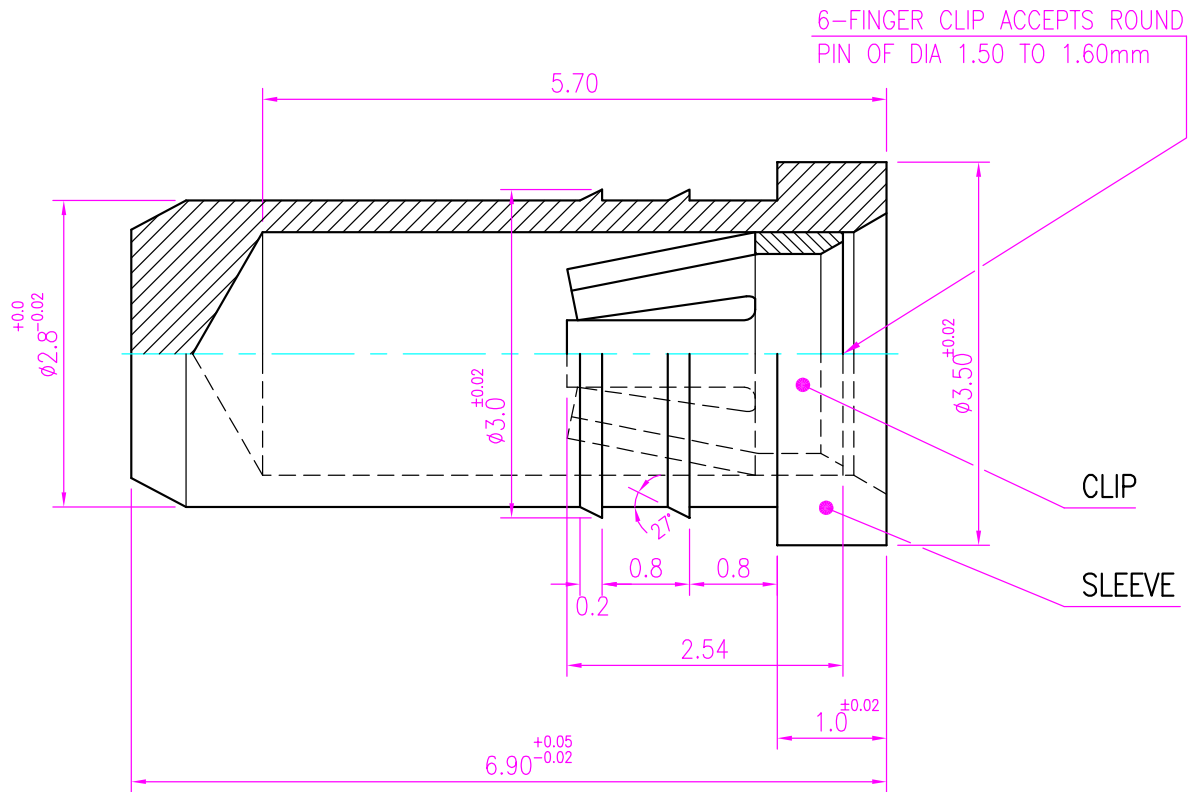

## ORDERING INFORMATION

P8040A1X-32

TYPE OF PLATING

FINISH	PART NUMBER
TIN PLATED	P8040A19-32
GOLD PLATED	P8040A12-32

MOQ- 2500 MIN

SPQ- 2500 PER PACK

REV.	DESCRIPTION	BY	DATE	APP'D BY
A	ORIGINAL	SACHIN	23.06.2003	



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.