



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK, SHIELDED, SIDE ENTRY

PART NO:PSY001S-XPXC-X
(SEE TABLE)

RoHS



PHYSICAL

MATERIAL

INSULATOR	:	PBT
FLAMMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT, ROUND PIN	:	PHOSPHOR BRONZE
FLAT PIN	:	PHOSPHOR BRONZE
SHIELDED	:	BRASS, TIN PLATED
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
VOLTAGE RATING	:	150V AC MAX
CURRENT RATING	:	1A
DIELECTRIC WITHSATNDING	:	1000Vrms

MECHANICAL DATA

MECHANICAL LIFE	:	50 CYCLES MIN
-----------------	---	---------------

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK, SHIELDED, SIDE ENTRY

PART NO:PSY001S-XPXC-X
(SEE TABLE)

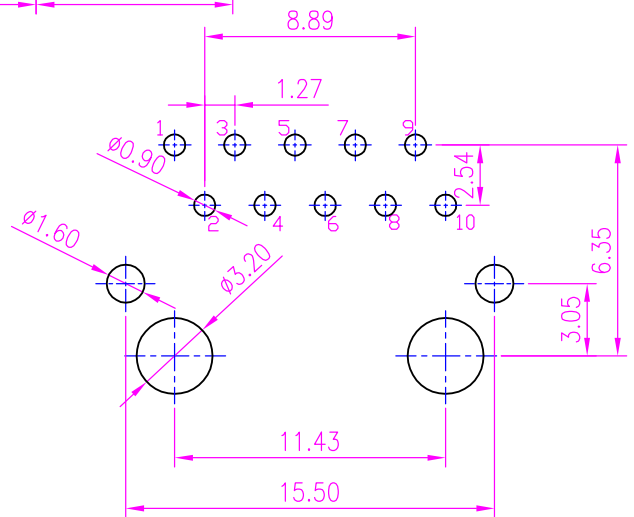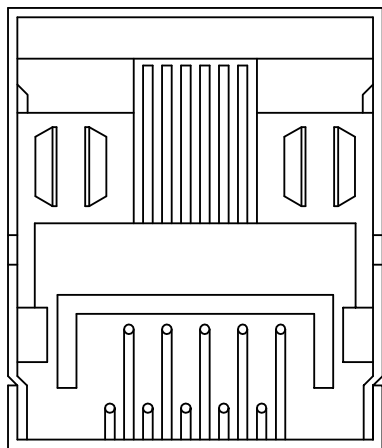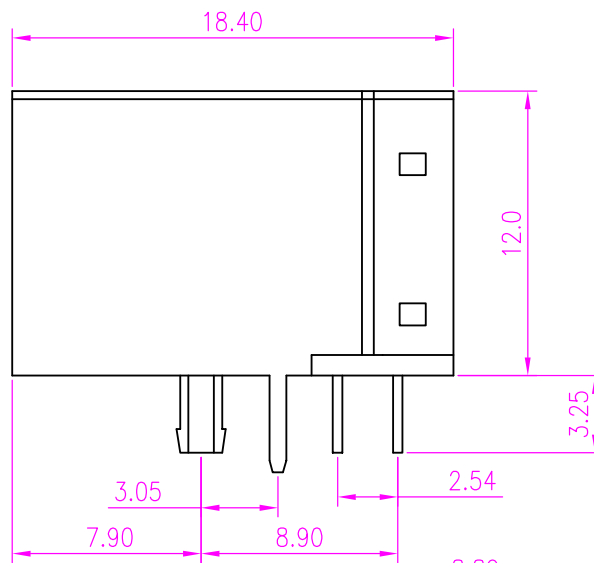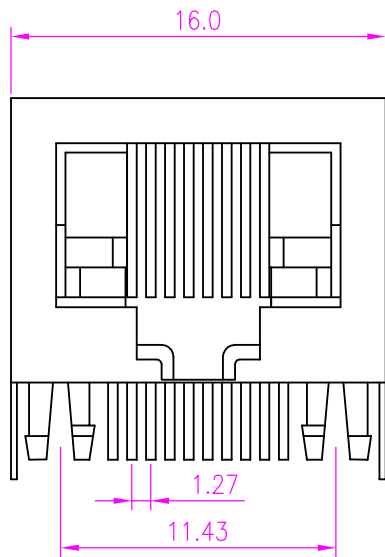

P.C.B LAYOUT

A1	MORE TECHNICAL DATA AND PLATING DETAILS ADDED	SACHIN	28.11.2003		
A	ORIGINAL	SAMSON	11.01.2003		
REV.	DESCRIPTION	DRN BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.3mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK, SHIELDED, SIDE ENTRY

PART NO:PSY001S-XPXC-X
(SEE TABLE)

ORDERING INFORMATION

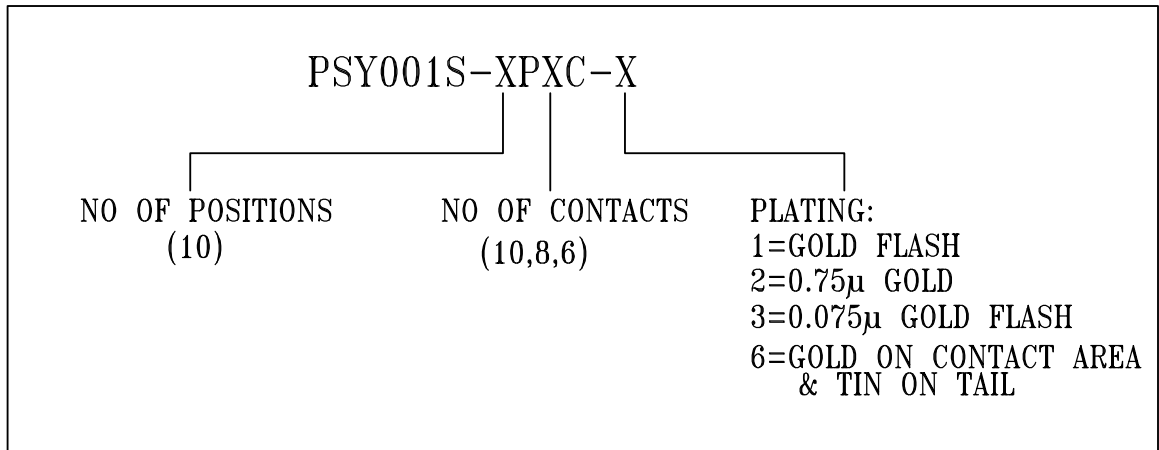

MOQ- ----

SPQ- ----