



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK WITH FLANGE, SIDE ENTRY, LOW PROFILE

PART NO: PSY002L-XPXC-X  
(SEE TABLE)

RoHS



## PHYSICAL

<b>MATERIAL</b>	:	
INSULATOR	:	PBT
FLAMMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT	:	PHOSPHOR BRONZE
<b>PACKAGING TYPE</b>	:	BULK PACKING

## ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
CURRENT RATING	:	1.5A
VOLTAGE RATING	:	150V AC MAX
DIELECTRIC WITHSATNDING	:	500V AC/MIN

## MECHANICAL DATA

MECHANICAL LIFE	:	50 CYCLES MIN
-----------------	---	---------------

## ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK WITH FLANGE, SIDE ENTRY, LOW PROFILE

PART NO: PSY002L-XPXC-X  
(SEE TABLE)

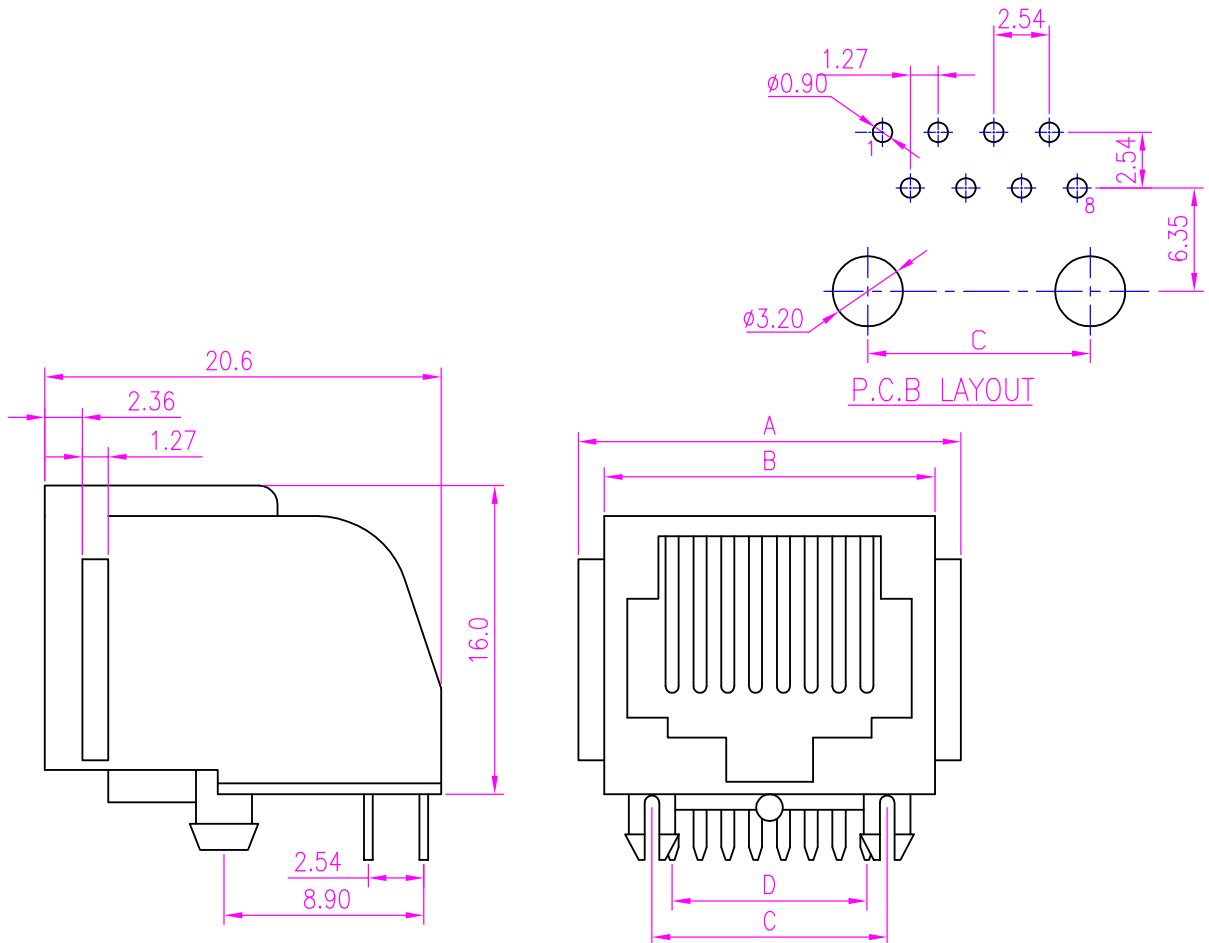

POSITIONS	DIM. A	DIM. B	DIM. C	DIM. D
4	13.7	11.1	7.62	3.81
6	15.7	13.2	10.16	6.35
8	17.7	15.2	11.43	8.89

A	ORIGINAL	CHAITRA	21.01.2008			
REV.	DESCRIPTION		DRN BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	




# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK WITH FLANGE, SIDE ENTRY, LOW PROFILE

PART NO:PSY002L-XPXC-X  
(SEE TABLE)

## ORDERING INFORMATION

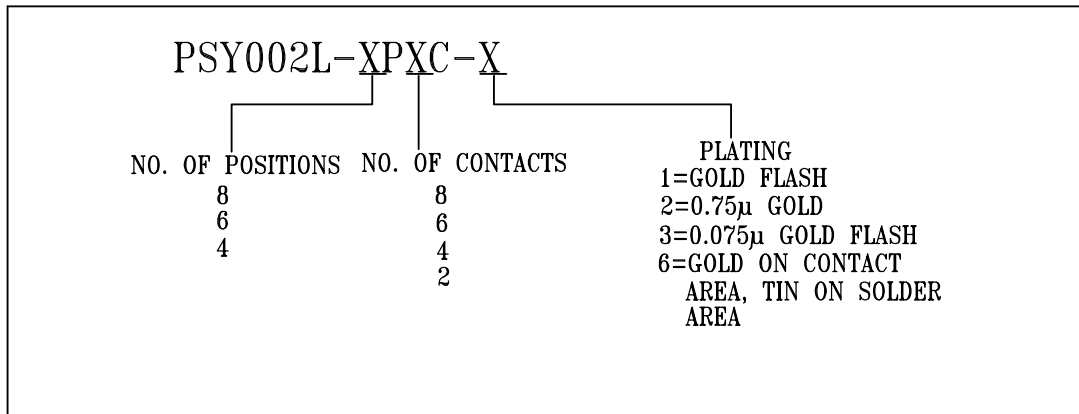

MOQ- ----

SPQ- ----