




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK SIDE ENTRY(TOP OPEN TYPE)

PART NO:PSY007-XPXC-X
(SEE TABLE)

RoHS

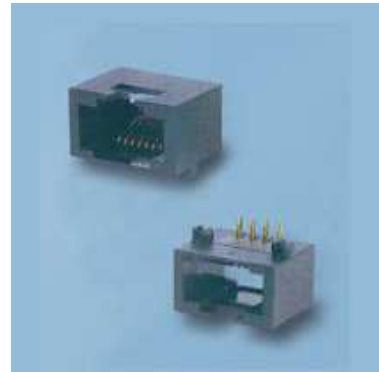

PHYSICAL

MATERIAL

INSULATOR	:	PBT
FLAMMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT	:	PHOSPHOR BRONZE, GOLD PLATED
SHIELDED	:	BRASS, TIN PLATED
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
CURRENT RATING	:	1A
VOLTAGE RATING	:	150V AC MAX
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA

MECHANICAL LIFE	:	50 CYCLES MIN
-----------------	---	---------------

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK SIDE ENTRY(TOP OPEN TYPE)

PART NO:PSY007-XPXC-X
(SEE TABLE)

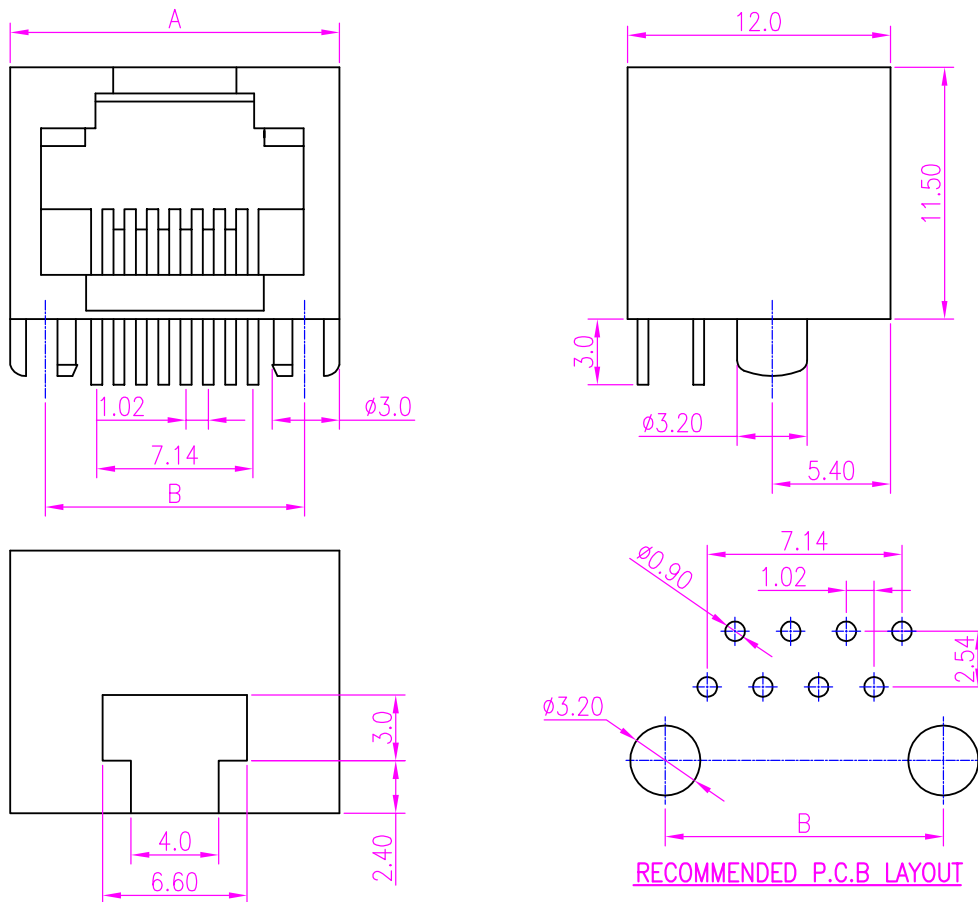

POSITION	A	B
6P	13.20	10.16
8P	15.20	12.16

REV.	DESCRIPTION	DRN BY	DATE	CK'ED BY	APP'D BY
A	ORIGINAL	SACHIN	23.09.2004		

Projection: Scale: NTS Sht. Size: A4 Gen. Tol.:±0.25mm ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK SIDE ENTRY(TOP OPEN TYPE)

PART NO:PSY007-XPXC-X
(SEE TABLE)

ORDERING INFORMATION

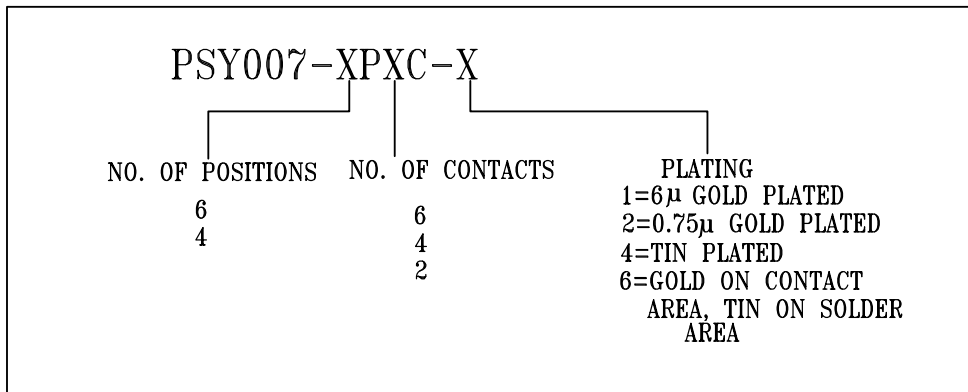

MOQ- ----

SPQ- ----