



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK TOP ENTRY WITH FLANGE

PART NO: PSY009-XPXC-X
(SEE TABLE)

RoHS



PHYSICAL

MATERIAL

INSULATOR	:	GLASS FIBER, PBT
FLAMMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT	:	PHOSPHOR BRONZE
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
CURRENT RATING	:	1A
VOLTAGE RATING	:	150V AC MAX
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA

MECHANICAL LIFE	:	500 CYCLES MIN
-----------------	---	----------------

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK TOP ENTRY WITH FLANGE

PART NO: PSY009-XPXC-X
(SEE TABLE)

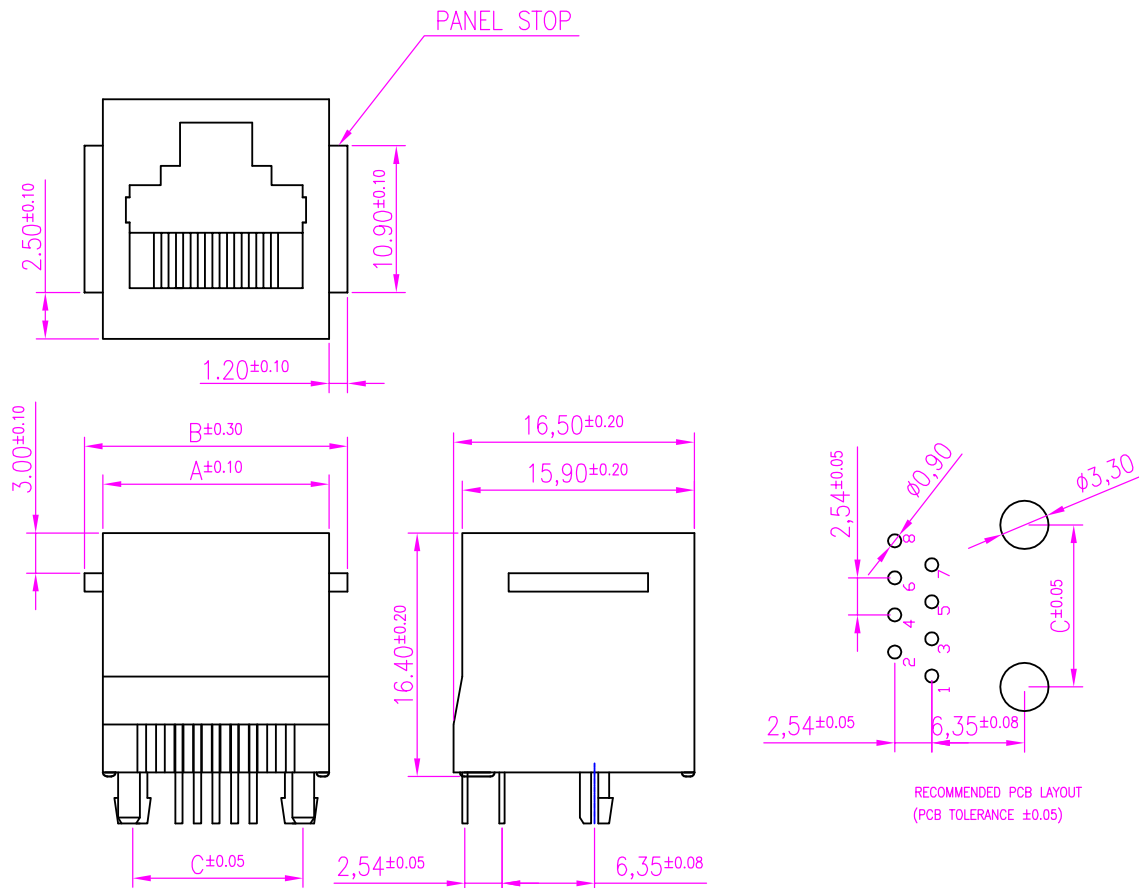

POSITION	A	B	C
4	11.40	13.80	7.65
6	13.40	15.90	10.16
8	15.50	17.90	11.43

A1	PANEL MOUNT DIMENSIONS & TOLERANCES INCLUDED	SIDDU	24.07.2008		
A	ORIGINAL	SACHIN	19.11.2007		
REV.	DESCRIPTION	DRN BY	DATE	CK'ED BY	APP'D BY
	Projection:	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK TOP ENTRY WITH FLANGE

PART NO: PSY009-XPXC-X
(SEE TABLE)

ORDERING INFORMATION

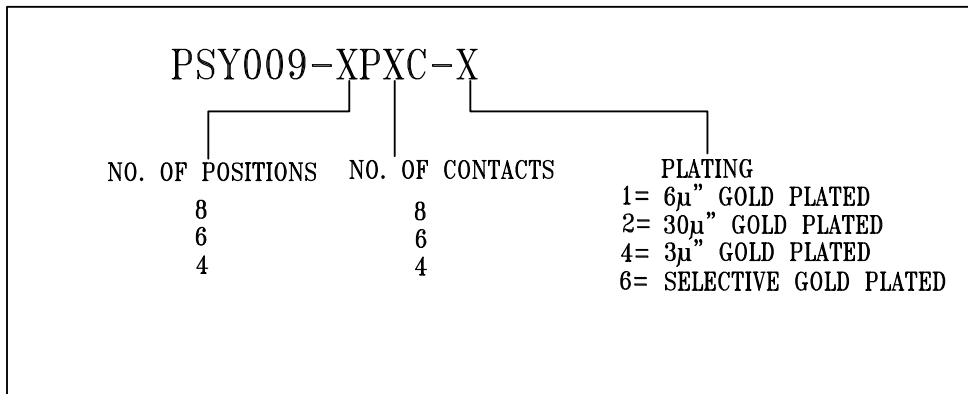

MOQ- ----

SPQ- ----