



# PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : MODULAR JACK, SIDE ENTRY, SHIELDED,  
DOUBLE DECKER**

**PART NO: PSY017PXXPXC-XD  
(SEE TABLE)**

RoHS



## PHYSICAL

### MATERIAL

INSULATOR : PBT  
FLAMMABILITY : UL 94V-0  
COLOR : BLACK COLOR  
CONTACT : PHOSPHORBRONZE  
PACKAGING TYPE : BULK PACKING

## ELECTRICAL

CONTACT RESISTANCE : 50m OHMS MAX  
INSULATION RESISTANCE : 500M OHMS MIN  
CURRENT RATING : 1.5A  
VOLTAGE RATING : 500V AC/MIN

## MECHANICAL DATA

MECHANICAL LIFE : 500 CYCLES MIN

## ENVIRONMENTAL DATA



TEMPERATURE RANGE : -40° TO +70° C



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK, SIDE ENTRY, SHIELDED,  
DOUBLE DECKER

PART NO: PSY017PXXPXC-XD  
(SEE TABLE)

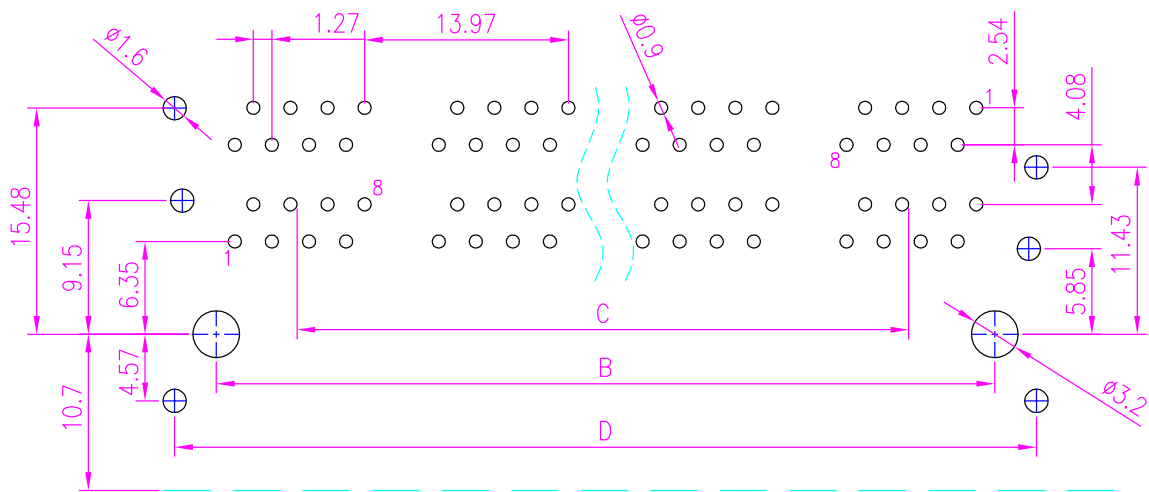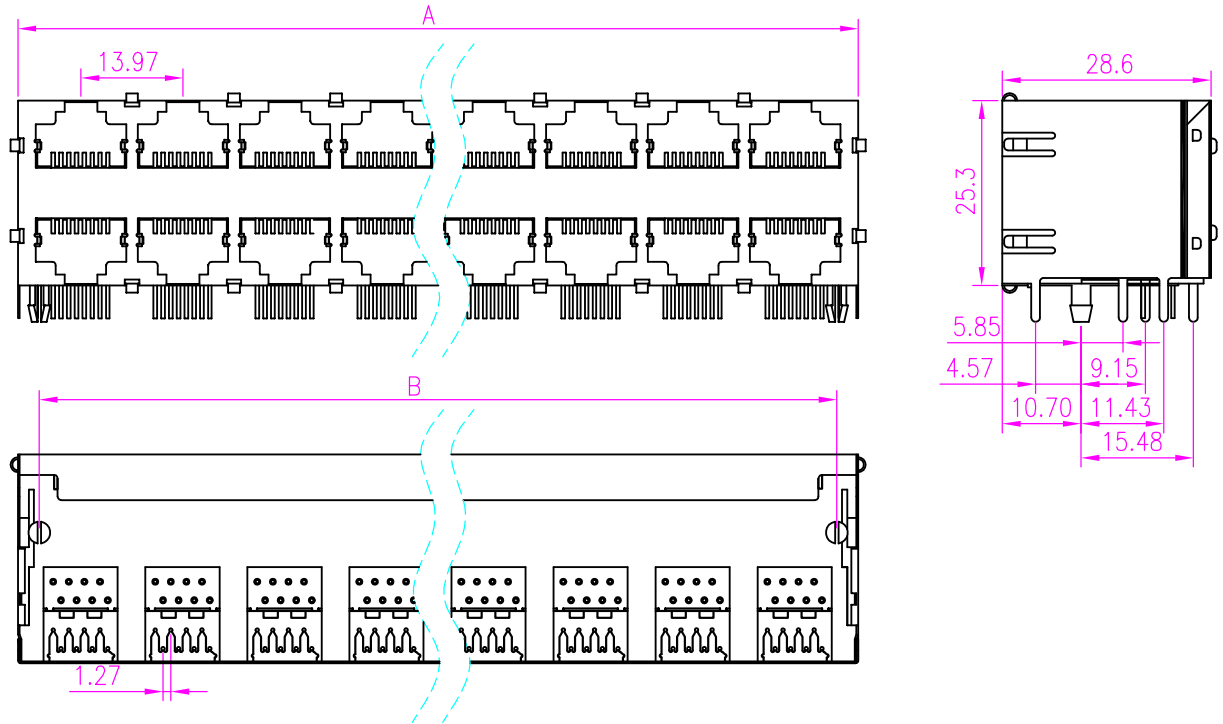

## RECOMMENDED P.C.B LAYOUT

A1	DRAWING REVISED	CHAITRA	25.07.2008		
A	ORIGINAL	CHAITRA	06.10.2007		
REV.	DESCRIPTION	DRN BY	DATE	CK'ED BY	APP'D BY
	Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.20mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>  
protectron@protectron.in




# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : MODULAR JACK, SIDE ENTRY, SHIELDED,  
DOUBLE DECKER

PART NO: PSY017PXXPXC-XD  
(SEE TABLE)

DIMENSIONS	NO. OF PORTS					
	2	4	6	8	12	16
A	17.2	31.2	45.2	59.2	87.2	115.2
B	11.43	25.40	39.37	53.34	81.28	109.22
C	-	13.98	27.96	41.94	69.90	97.86
D	17.00	30.98	44.95	58.92	86.86	114.80

## ORDERING INFORMATION

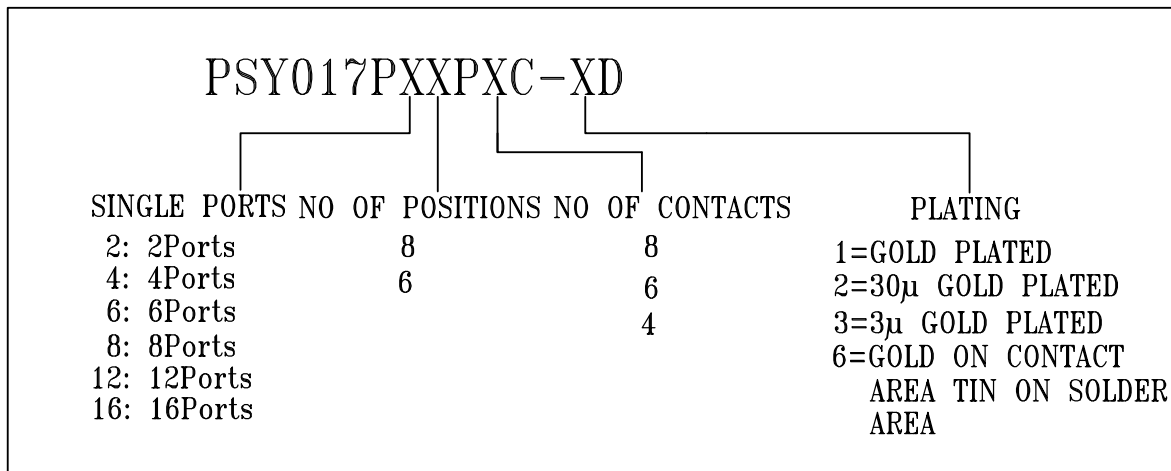

MOQ- ----

SPQ- ----