



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RJ11 MODULAR JACK SIDE ENTRY, UNSHIELDED, 6P4C, DUAL PORT, WITHOUT FLANGE

PART NO: PSY022D-XPXC-X  
(SEE TABLE)

RoHS



## PHYSICAL

### MATERIAL

INSULATOR	:	THERMOPLASTIC
FLAMMABILITY	:	UL 94V-0
COLOR	:	BLACK COLOR
CONTACT	:	PHOSPHOR BRONZE
PACKAGING TYPE	:	BULK PACKING

## ELECTRICAL

CONTACT RESISTANCE	:	30m OHMS MAX
INSULATION RESISTANCE	:	500M OHMS MIN
CURRENT RATING	:	1.5A
WITHSTANDING VOLTAGE	:	1000V AC/MIN

## MECHANICAL DATA

MECHANICAL LIFE	:	500 CYCLES MIN
-----------------	---	----------------

## ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +70° C
-------------------	---	----------------



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RJ11 MODULAR JACK SIDE ENTRY, UNSHIELDED, 6P4C, DUAL PORT, WITHOUT FLANGE

PART NO: PSY022D-XPXC-X  
(SEE TABLE)

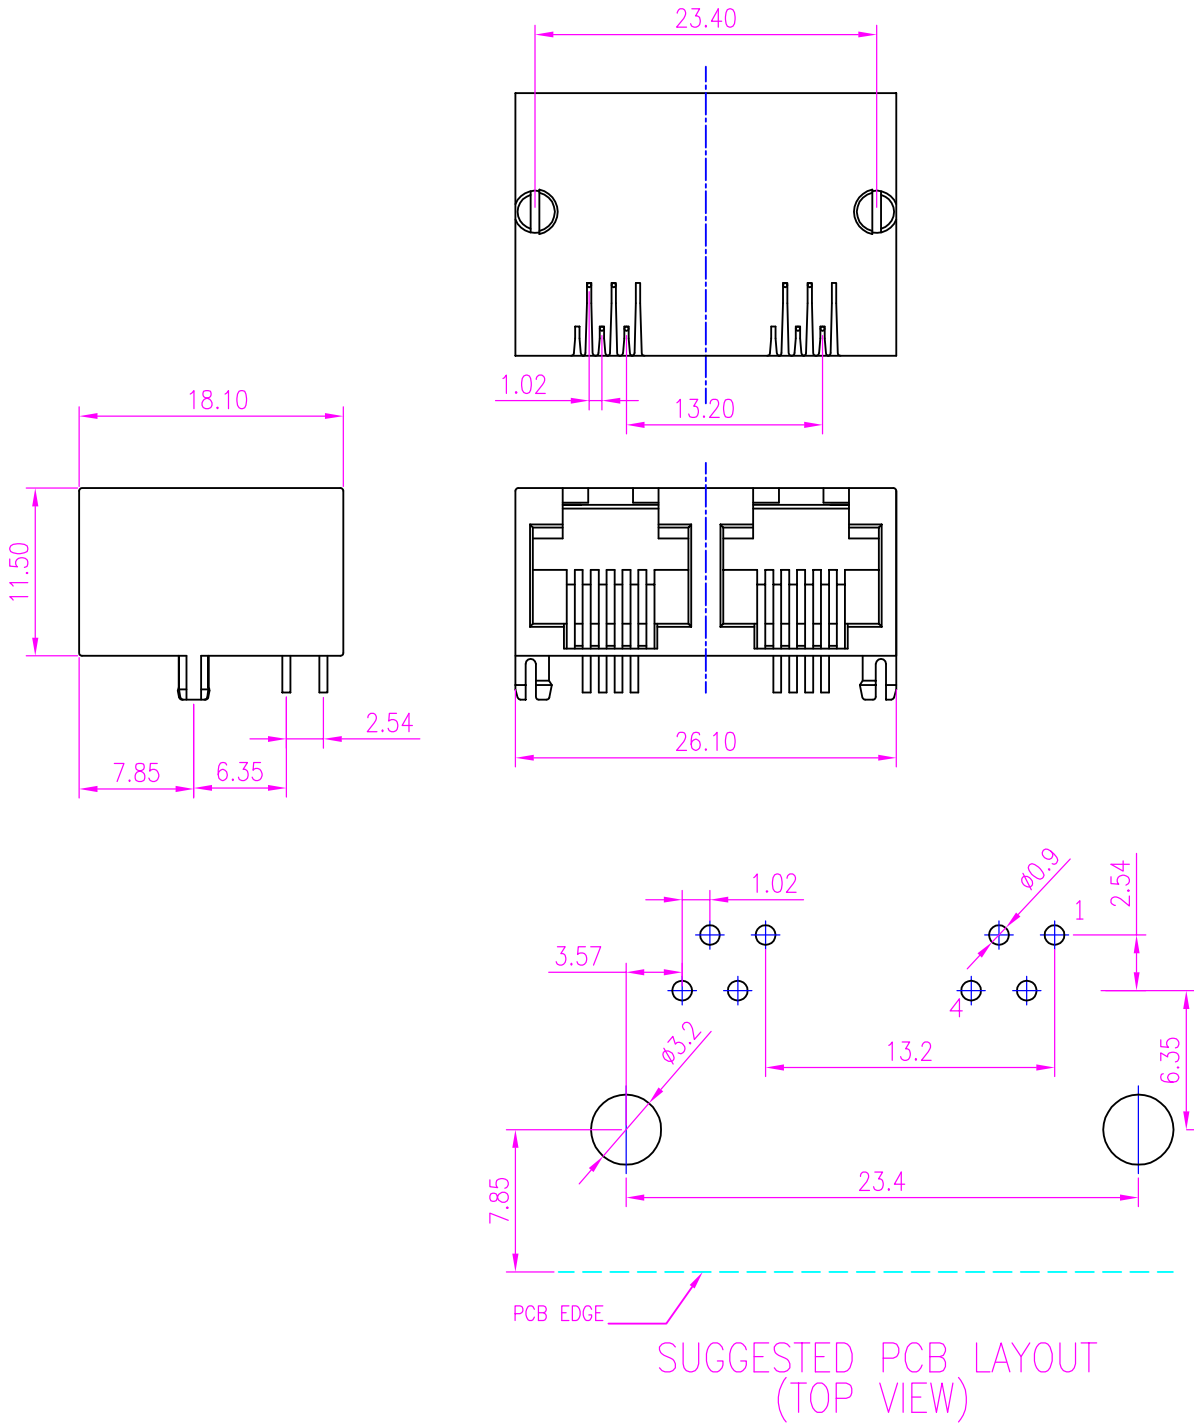

SUGGESTED PCB LAYOUT  
(TOP VIEW)

A	ORIGINAL		LOKANATH	29.07.2009		
REV.	DESCRIPTION			DRN BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.25$ mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	




# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RJ11 MODULAR JACK SIDE ENTRY, UNSHIELDED,  
6P4C, DUAL PORT, WITHOUT FLANGE

PART NO: PSY022D-XPXC-X  
(SEE TABLE)

## ORDERING INFORMATION

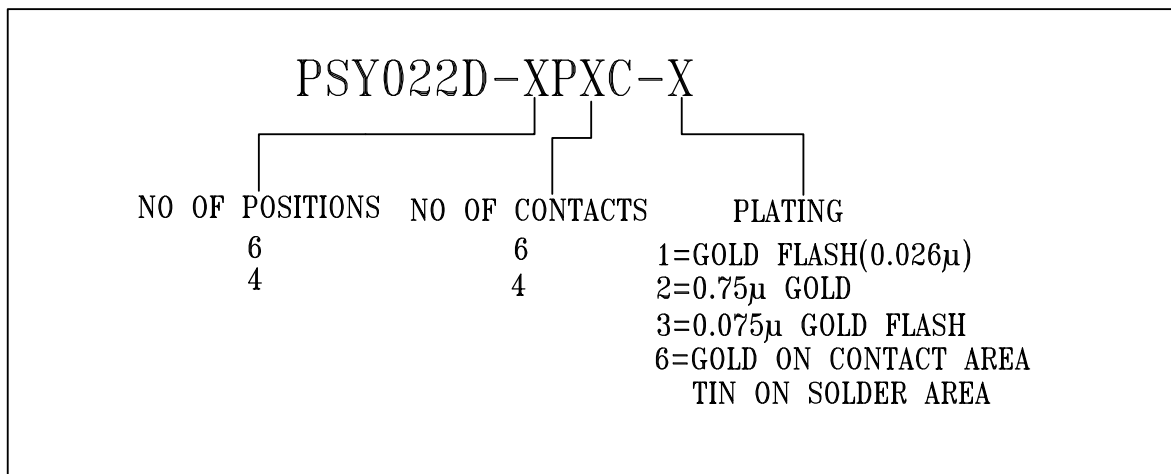

MOQ- ----

SPQ- ----