



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH, WITH RAMP

PART NO: P9035-29-00-X
(SEE TABLE)

RoHS



PHYSICAL

INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-0
COLOR	:	NATURAL COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CURRENT RATING	:	7A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX
VOLTAGE RATING	:	250V AC MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40° TO +104° C
PROCESS RATING	:	+260°C 10 SECONDS



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH, WITH RAMP

PART NO: P9035-29-00-X
(SEE TABLE)

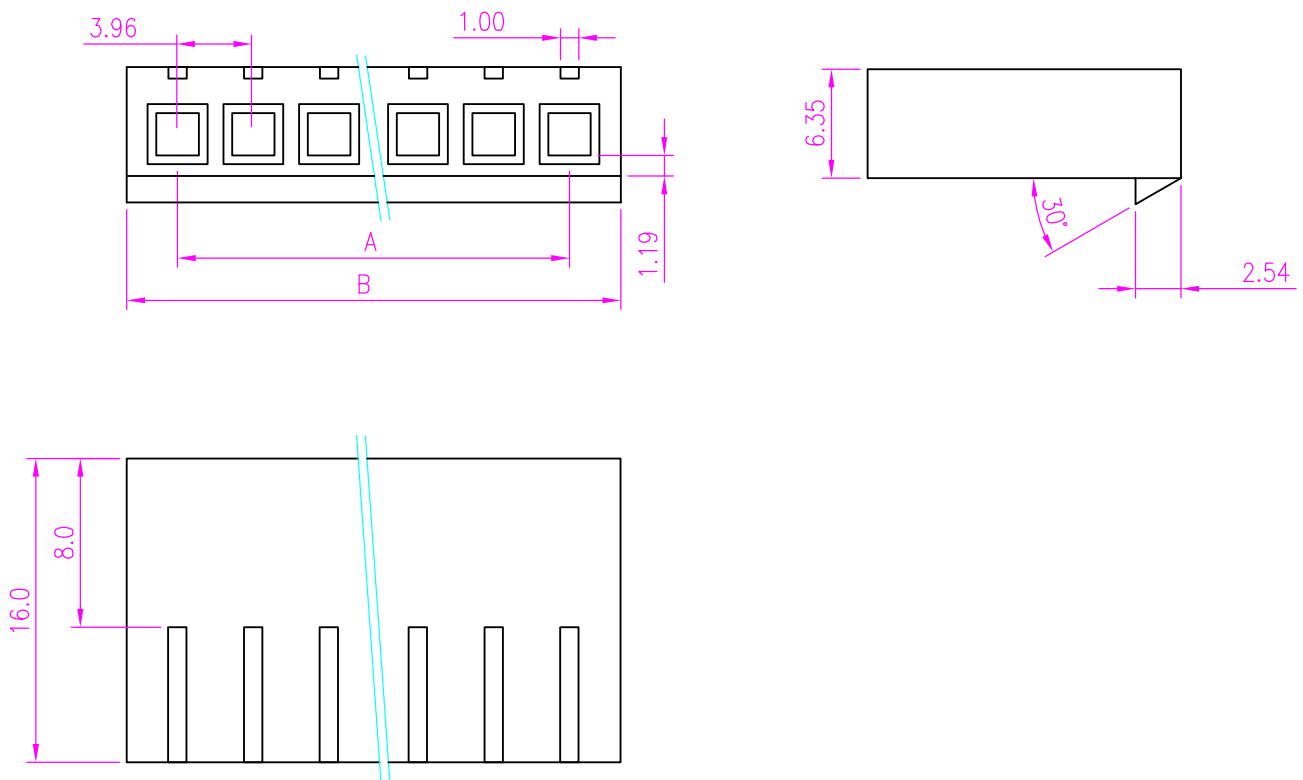

A1	DIM TABLE, OTHER TECHNICAL DETAILS INCLUDED			SACHIN	18.08.2004		
A	ORIGINAL			JJ	17.09.1998		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH, WITH RAMP

PART NO: P9035-29-00-X
(SEE TABLE)

ORDERING INFORMATION

P9035-29-00-X

NO OF WAYS
(2-18)

No. OF WAYS	DIMENSION		PART NUMBER
	A	B ±1.0	
2	3.96	7.80	P9035-29-00-2
3	7.92	11.80	P9035-29-00-3
4	11.88	15.80	P9035-29-00-4
5	15.84	19.80	P9035-29-00-5
6	19.80	23.70	P9035-29-00-6
7	23.76	27.60	P9035-29-00-7
8	27.72	31.60	P9035-29-00-8
9	31.68	35.60	P9035-29-00-9
10	35.64	39.50	P9035-29-00-A
11	39.60	43.50	P9035-29-00-B
12	43.56	47.50	P9035-29-00-C
13	47.52	51.40	P9035-29-00-D
14	51.48	55.40	P9035-29-00-E
15	55.44	59.30	P9035-29-00-F
16	59.40	63.30	P9035-29-00-G
17	63.36	67.30	P9035-29-00-H
18	67.32	71.20	P9035-29-00-I

MATES WITH

P9036 TERMINALS
WITH LOCKING RAMP:
P9031,32,33 SERIES WAFER

MOQ- ----

SPQ- ----