



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 4.20mm PITCH MINIFIT HOUSING, DOUBLE ROW

PART NO: P9049PH29-00-X  
X=NO. OF WAYS(2-24)

RoHS



## PHYSICAL

### INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-2
COLOR	:	NATURAL COLOR
PACKAGING TYPE	:	BULK PACKING

## ELECTRICAL

INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
CURRENT RATING	:	7A AC/DC
VOLTAGE RATING	:	600V AC/DC
CONTACT RESISTANCE	:	10m OHMS MAX

## ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-25° TO +85° C
-------------------	---	----------------



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 4.20mm PITCH MINIFIT HOUSING, DOUBLE ROW

PART NO: P9049PH29-00-X  
X=NO. OF WAYS(2-24)

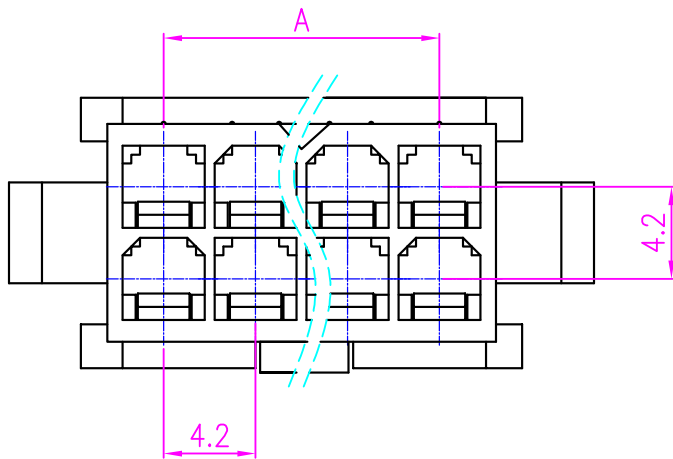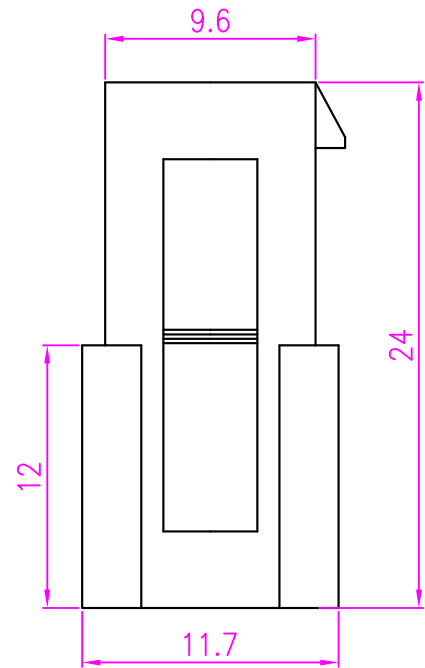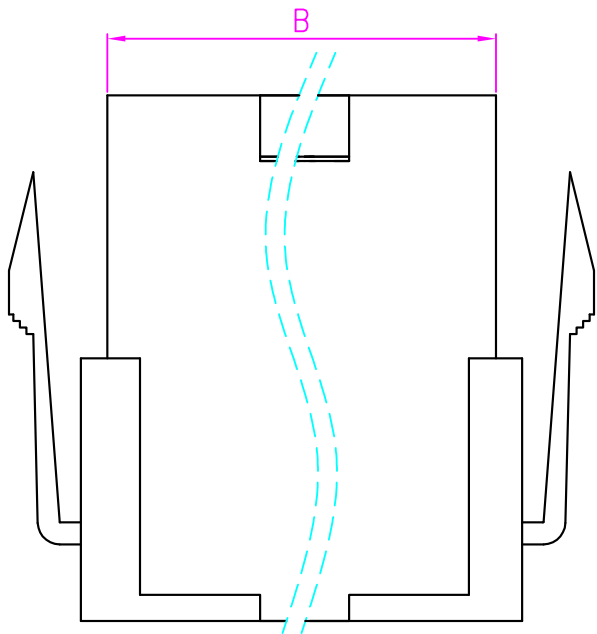

A	ORIGINAL		GURURAJA	12.10.2006		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.25mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 4.20mm PITCH MINIFIT HOUSING, DOUBLE ROW

PART NO: P9049PH29-00-X  
X=NO. OF WAYS(2-24)

### ORDERING INFORMATION

P9049PH29-00-X

NO OF WAYS  
(2-24)

CIRCUITS	A	B	PART NUMBER
2	--	5.40	P9049PH29-00-2
4	4.20	9.60	P9049PH29-00-4
6	8.40	13.80	P9049PH29-00-6
8	12.60	18.00	P9049PH29-00-8
10	16.80	22.20	P9049PH29-00-A
12	21.00	26.40	P9049PH29-00-C
14	25.20	30.60	P9049PH29-00-E
16	29.40	34.80	P9049PH29-00-G
18	33.60	39.00	P9049PH29-00-I
20	37.80	43.20	P9049PH29-00-K
22	42.00	47.40	P9049PH29-00-M
24	46.20	51.60	P9049PH29-00-O

#### MATES WITH

CRIMP TERMINAL:  
P9049PT SERIES  
P9049S/R SERIES HEADER

MOQ- ----

SPQ- ----