




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.25mm PITCH RECEPTACLE HOUSINGS

PART NO: P9056H29-00-X
X=NO. OF WAYS(2-18)

RoHS

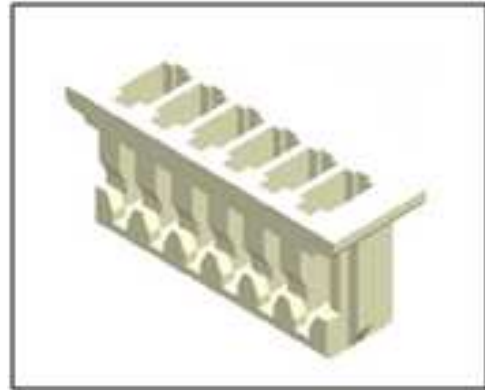

PHYSICAL

INSULATION

MATERIAL	:	NYLON
FLAMMABILITY	:	UL94V-0
COLOR	:	NATURAL COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	500M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX
VOLTAGE RATING	:	125V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-25° TO +85° C
PROCESS RATING	:	230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : 1.25mm PITCH RECEPTACLE HOUSINGS

PART NO: P9056H29-00-X
X=NO. OF WAYS(2-18)

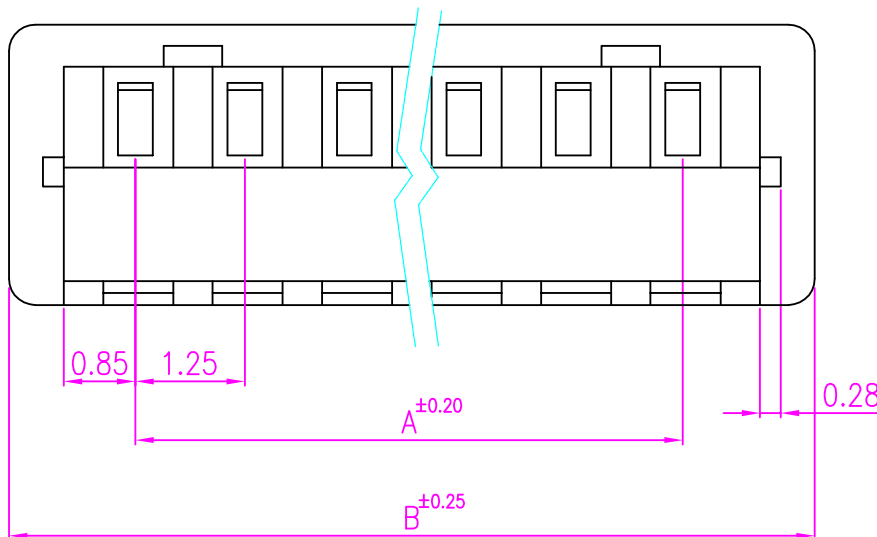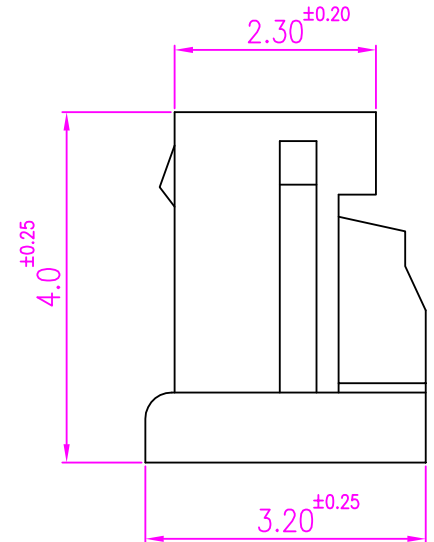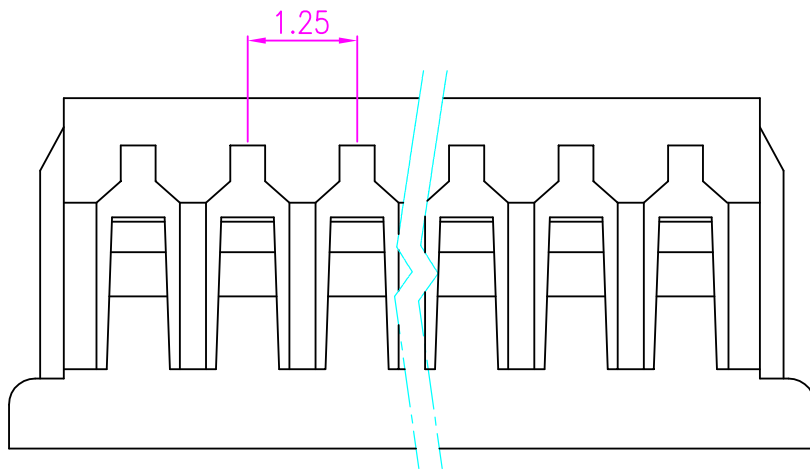

A1	DRAWING REDRAWN, TECHNICAL DATA & ADDITIONAL NO. OF WAYS ADDED.	SANDHYA	24.03.2007		
A	ORIGINAL	SACHIN	22.01.2004		
REV.	DESCRIPTION	DRN BY	DATE	CKED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.25mm PITCH RECEPTACLE HOUSINGS

PART NO: P9056H29-00-X
X=NO. OF WAYS(2-18)

ORDERING INFORMATION

P9056H29-00-X

NO. OF WAYS
(2-18)

CIRCUIT	DIM.A(mm)	DIM.B(mm)	CIRCUIT	DIM.A(mm)	DIM.B(mm)
2	1.25	4.25	B=11	12.50	15.50
3	2.50	5.50	C=12	13.75	16.75
4	3.75	6.75	D=13	15.00	18.00
5	5.00	8.00	E=14	16.25	19.25
6	6.25	9.25	F=15	17.50	20.50
7	7.50	10.50	G=16	18.75	21.75
8	8.75	11.75	H=17	20.00	23.00
9	10.00	13.00	I=18	21.25	24.25
A=10	11.25	14.25			

MATES WITH

P9056T, P9056S
P9056R

MOQ- ----

SPQ- ----