


DESCRIPTION :1.25mm PITCH WIRE TO BOARD CONNECTOR,
RIGHT ANGLE

PART NO:P9056R29-19-X
X=NO. OF WAYS(2-18)

RoHS

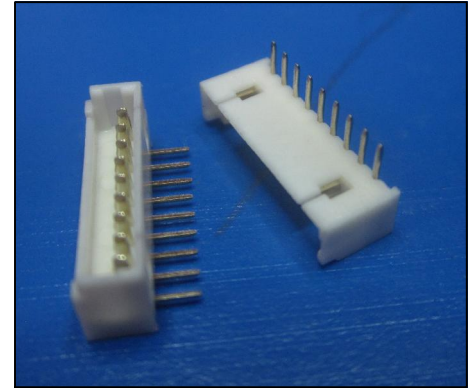

PHYSICAL

INSULATION

MATERIAL : NYLON
 FLAMMABILITY : UL94V-0
 COLOR : NATURAL COLOR

CONTACT

MATERIAL : COPPER ALLOY
 SOLDER TABS : TIN PLATED

PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 500M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 125V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -25° TO +85° C
PROCESS RATING : 230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.25mm PITCH WIRE TO BOARD CONNECTOR,
RIGHT ANGLE

PART NO: P9056R29-19-X
X=NO. OF WAYS(2-18)

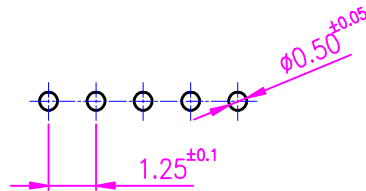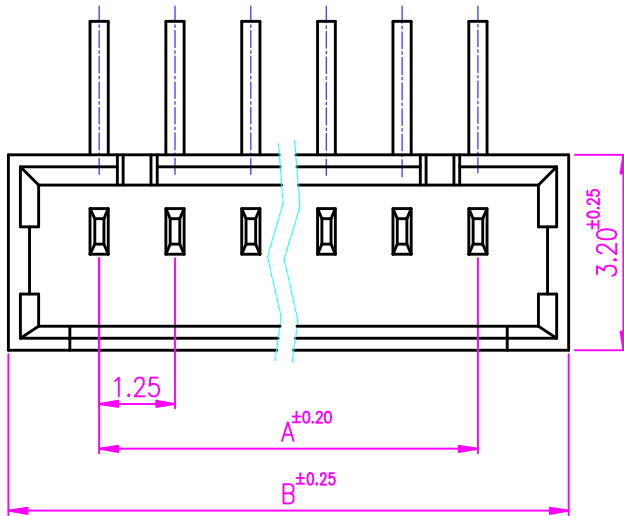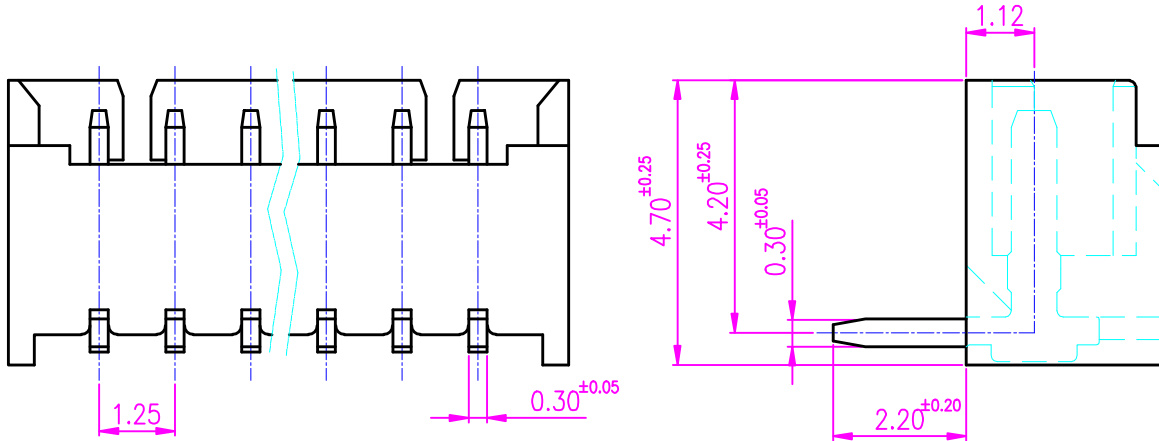

RECOMMENDED PCB LAYOUT

A1	DRAWING REDRAWN, TECHNICAL DATA & ADDITIONAL NO. OF WAYS ADDED.	SANDHYA	24.03.2007		
A	ORIGINAL	SACHIN	30.06.2003		
REV.	DESCRIPTION	DRN BY	DATE	CKED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	--------------------	---

DESCRIPTION :1.25mm PITCH WIRE TO BOARD CONNECTOR,
RIGHT ANGLE

PART NO:P9056R29-19-X
X=NO. OF WAYS(2-18)

ORDERING INFORMATION

P9056R29-19-X

NO. OF WAYS
(2-18)

CIRCUIT	DIM.A(mm)	DIM.B(mm)	CIRCUIT	DIM.A(mm)	DIM.B(mm)
2	1.25	4.25	B=11	12.50	15.50
3	2.50	5.50	C=12	13.75	16.75
4	3.75	6.75	D=13	15.00	18.00
5	5.00	8.00	E=14	16.25	19.25
6	6.25	9.25	F=15	17.50	20.50
7	7.50	10.50	G=16	18.75	21.75
8	8.75	11.75	H=17	20.00	23.00
9	10.00	13.00	I=18	21.25	24.25
A=10	11.25	14.25			

MATES WITH

P9056H / P9056T

MOQ- ----

SPQ- ----