




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 2.0mm PITCH

PART NO: P9057H29-00-X
X=NO. OF WAYS(2-16)

RoHS

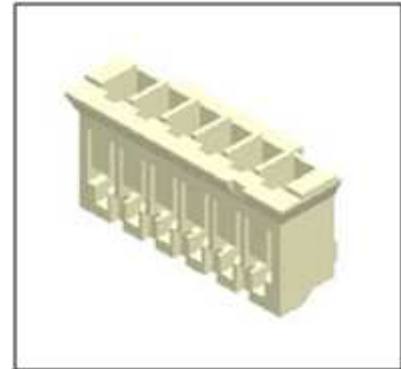

PHYSICAL

INSULATION

MATERIAL	:	NYLON
FLAMMABILITY	:	UL94V-0
COLOR	:	WHITE COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	800V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX
VOLTAGE RATING	:	100V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-25° TO +85° C
-------------------	---	----------------



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 2.0mm PITCH

PART NO: P9057H29-00-X
X=NO. OF WAYS(2-16)

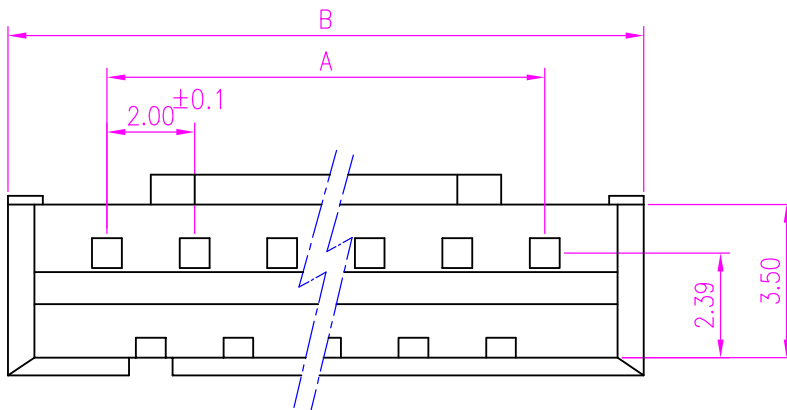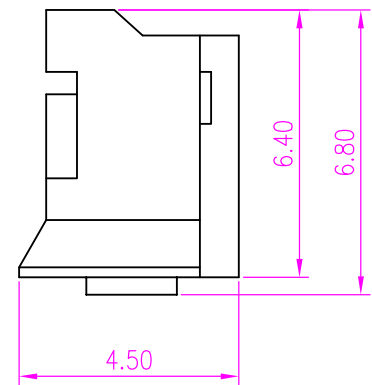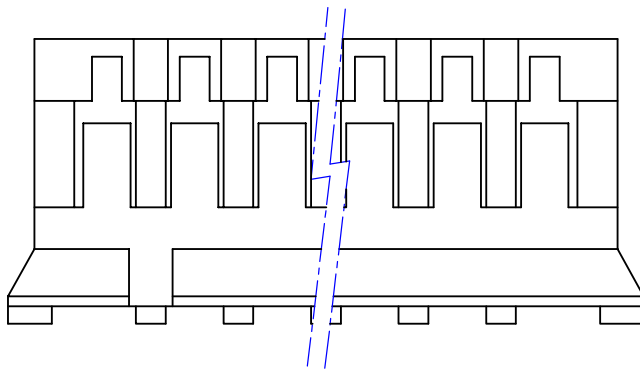

A2	TECHNICAL DETAILS & TOLERANCE UPDATED	SUJATHA	17.08.2010		
A1	TECHNICAL DATA INCLUDED	SANDHYA	26.12.2005		
A	ORIGINAL	SACHIN	01.07.2003		

REV.	DESCRIPTION	DRN BY	DATE	CKED BY	APP'D BY
	Projection:	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.3mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 2.0mm PITCH

PART NO: P9057H29-00-X
X=NO. OF WAYS(2-16)

ORDERING INFORMATION

P9057H29-00-X

NO OF WAYS
(2-16)

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.00	6.00	P9057H29-00-2
3	4.00	8.00	P9057H29-00-3
4	6.00	10.00	P9057H29-00-4
5	8.00	12.00	P9057H29-00-5
6	10.00	14.00	P9057H29-00-6
7	12.00	16.00	P9057H29-00-7
8	14.00	18.00	P9057H29-00-8
9	16.00	20.00	P9057H29-00-9
10	18.00	22.00	P9057H29-00-A
11	20.00	24.00	P9057H29-00-B
12	22.00	26.00	P9057H29-00-C
13	24.00	28.00	P9057H29-00-D
14	26.00	30.00	P9057H29-00-E
15	28.00	32.00	P9057H29-00-F
16	30.00	34.00	P9057H29-00-G

MATES WITH

P9057S/ P9057R
P9057T -TERMINAL

MOQ- ----

SPQ- ----