


DESCRIPTION : 2.0mm PITCH PH CONNECTOR, STRAIGHT

PART NO: P9057S29-19-X
X=NO. OF WAYS(2-20)

RoHS

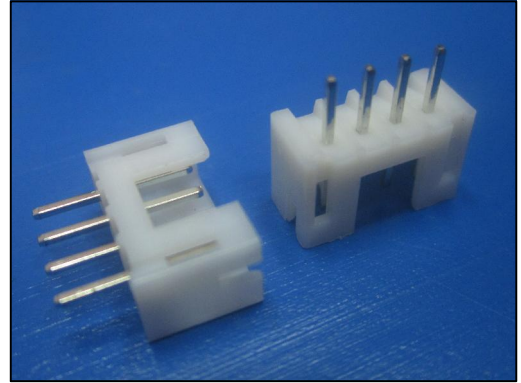

PHYSICAL DATA

INSULATION

- MATERIAL** : NYLON 66
- FLAMMABILITY** : UL94V-0
- COLOR** : NATURAL COLOR
- PIN MATERIAL** : COPPER ALLOY, TIN PLATED
- PACKAGING TYPE** : BULK PACKING

ELECTRICAL DATA


- CURRENT RATING** : 1A
- INSULATION RESISTANCE** : 1000M OHMS MIN
- DIELECTRIC WITHSTANDING** : 800V AC/MIN
- CONTACT RESISTANCE** : 20m OHMS MAX
- VOLTAGE RATING** : 100V AC/DC

ENVIRONMENTAL DATA



- TEMPERATURE RANGE** : -25° TO +85° C
- PROCESS RATING** : 230°C FOR 5SEC

DESCRIPTION : 2.0mm PITCH PH CONNECTOR, STRAIGHT

PART NO: P9057S29-19-X
X=NO. OF WAYS(2-20)

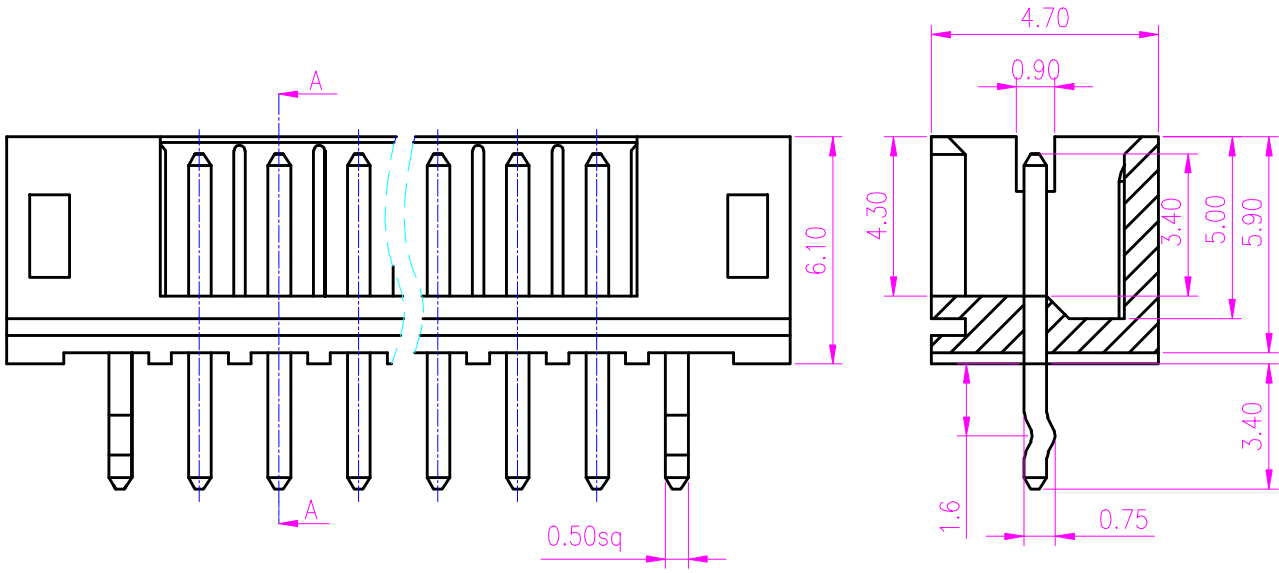


Section A-A

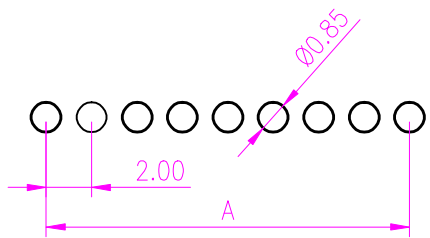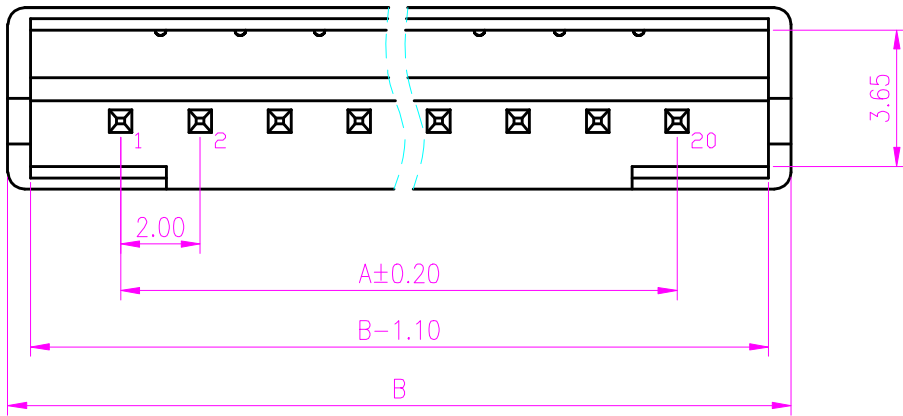

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

A	ORIGINAL	RAVISH.S	18.12.2010		
REV.	DESCRIPTION	DRN BY	DATE	CKED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.4mm ±2'	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
--	------------	---------------	--------------------------	---

DESCRIPTION : 2.0mm PITCH PH CONNECTOR, STRAIGHT

PART NO:P9057S29-19-X
X=NO. OF WAYS(2-20)

ORDERING INFORMATION

P9057S29-19-X

NO. OF WAYS
(2-20)

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.00	6.00	P9057S29-19-2
3	4.00	8.00	P9057S29-19-3
4	6.00	10.00	P9057S29-19-4
5	8.00	12.00	P9057S29-19-5
6	10.00	14.00	P9057S29-19-6
7	12.00	16.00	P9057S29-19-7
8	14.00	18.00	P9057S29-19-8
9	16.00	20.00	P9057S29-19-9
10	18.00	22.00	P9057S29-19-A
11	20.00	24.00	P9057S29-19-B
12	22.00	26.00	P9057S29-19-C
13	24.00	28.00	P9057S29-19-D
14	26.00	30.00	P9057S29-19-E
15	28.00	32.00	P9057S29-19-F
16	30.00	34.00	P9057S29-19-G
17	32.00	36.00	P9057S29-19-H
18	34.00	38.00	P9057S29-19-I
19	36.00	40.00	P9057S29-19-J
20	38.00	42.00	P9057S29-19-K

MATES WITH

P9057H -HOUSING
P9057T -TERMINAL

MOQ- ----

SPQ- ----