



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 1.50mm PITCH

PART NO: P9058H29-00-X
X=NO. OF WAYS(2-13)

RoHS



PHYSICAL

INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-0
COLOR	:	NATURAL COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	500M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX
VOLTAGE RATING	:	100V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-25° TO +85° C
PROCESS RATING	:	230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 1.50mm PITCH

PART NO: P9058H29-00-X
X=NO. OF WAYS(2-13)

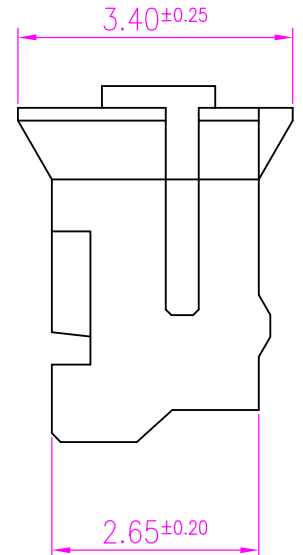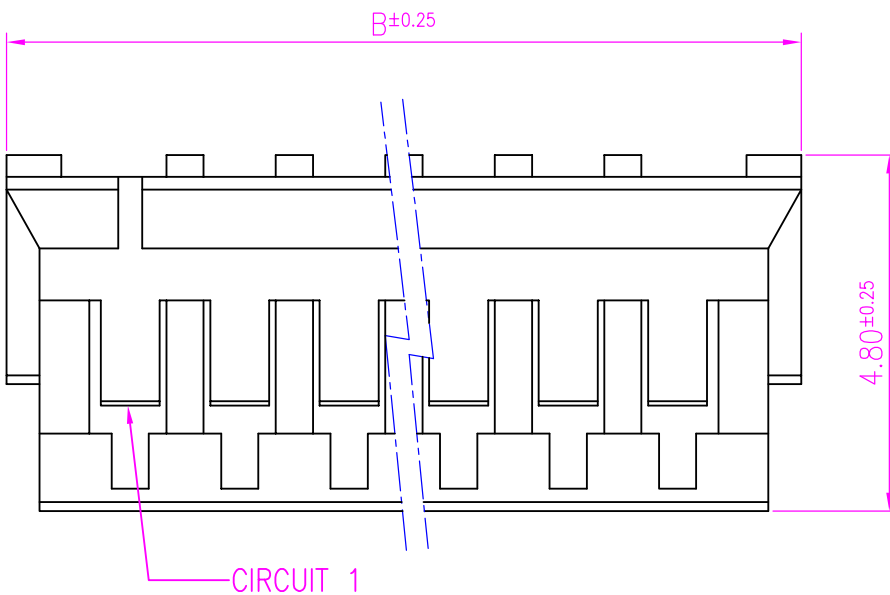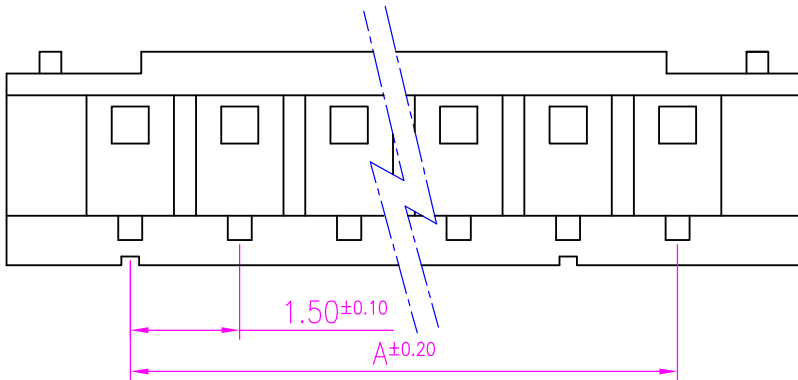

A	ORIGINAL		SIDDU	05.09.2007	PREETHI	
REV.	DESCRIPTION			DRN BY	DATE	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR HOUSING 1.50mm PITCH

PART NO: P9058H29-00-X
X=NO. OF WAYS(2-13)

ORDERING INFORMATION

P9058H29-00-X

NO OF WAYS
(2-13)

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	1.50	4.50	P9058H29-00-2
3	3.00	6.00	P9058H29-00-3
4	4.50	7.50	P9058H29-00-4
5	6.00	9.00	P9058H29-00-5
6	7.50	10.50	P9058H29-00-6
7	9.00	12.00	P9058H29-00-7
8	10.50	13.50	P9058H29-00-8
9	12.00	15.00	P9058H29-00-9
10	13.50	16.50	P9058H29-00-A
11	15.00	18.00	P9058H29-00-B
12	16.50	19.50	P9058H29-00-C
13	18.00	21.00	P9058H29-00-D

MATES WITH

P9058S / P9058R

MOQ- ----

SPQ- ----