



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 2.5mm PITCH FOR SHROUDED
HEADER

PART NO: P9060H29-00-X
X=NO. OF WAYS(2-16)

RoHS



PHYSICAL

INSULATION

MATERIAL : NYLON 66
FLAMMABILITY : UL94V-0
COLOR : WHITE COLOR
PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC/MIN
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -25° TO +85° C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 2.5mm PITCH FOR SHROUDED
HEADER

PART NO: P9060H29-00-X
X=NO. OF WAYS(2-16)

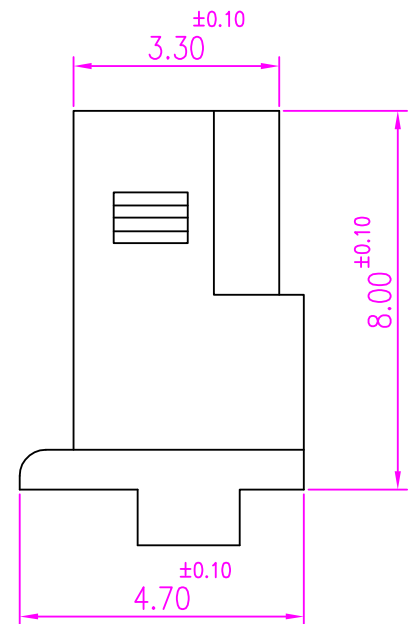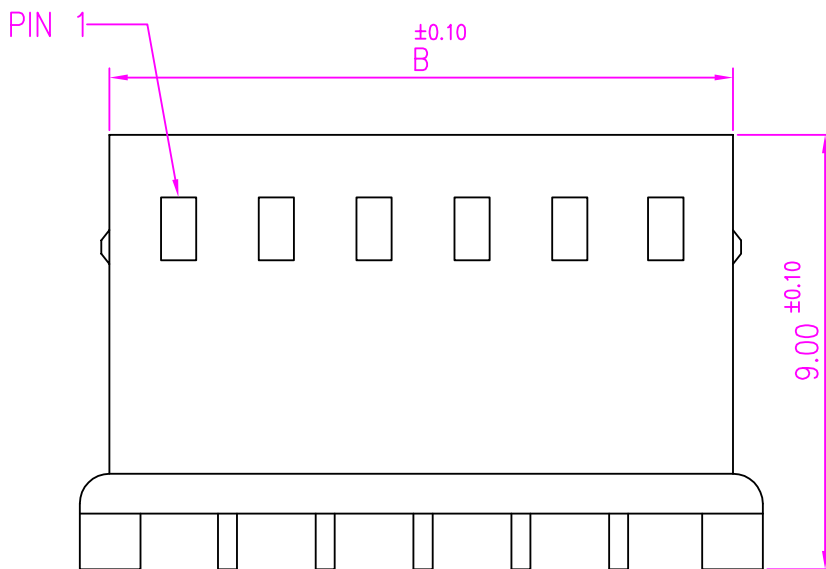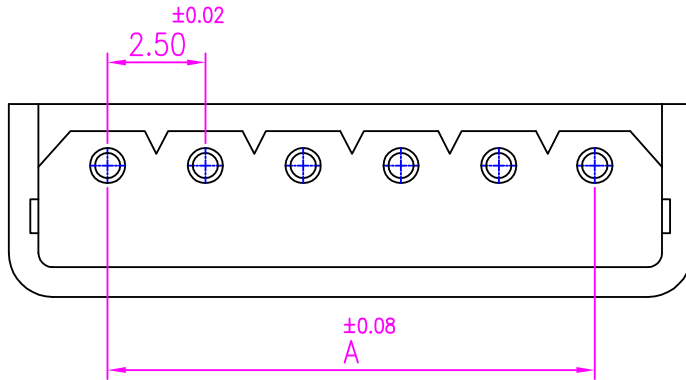

A	ORIGINAL		SANDHYA	03.08.2005		
REV.	DESCRIPTION			DRN BY	DATE	CKED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 2.5mm PITCH FOR SHROUDED
HEADER

PART NO: P9060H29-00-X
X=NO. OF WAYS(2-16)

ORDERING INFORMATION

P9060H29-00-X

NO OF WAYS
(2-16)

CIRCUIT	DIM.A (mm)	DIM.B (mm)
2	2.50	5.80
3	5.00	8.30
4	7.50	10.80
5	10.00	13.30
6	12.50	15.80
7	15.00	18.30
8	17.50	20.80
9	20.00	23.30
A=10	22.50	25.80
B=11	25.00	28.30
C=12	27.50	30.80
D=13	30.00	33.30
E=14	32.50	35.80
F=15	35.00	38.30
G=16	37.50	40.80

MATES WITH

P9060S - WAFER
P9060T - TERMINAL

MOQ- ----

SPQ- ----