


DESCRIPTION : WAFER, SHROUDED, 2.5mm PITCH, ROUND PIN, RIGHT ANGLE

PART NO: P9060R29-19-X
X=NO. OF WAYS(2-16)

RoHS

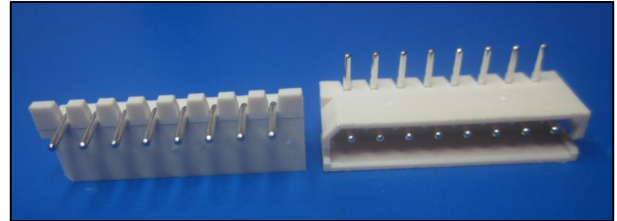

PHYSICAL

INSULATION

MATERIAL : NYLON 66
FLAMMABILITY : UL94V-0
COLOR : PANTONE COLOR(7506C)
CONTACT : COPPER ALLOY, TIN PLATED
PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 250V AC/DC


ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25° TO +85° C
PROCESS RATING : 230°C FOR 5SEC

DESCRIPTION : WAFER, SHROUDED, 2.5mm PITCH, ROUND PIN,
RIGHT ANGLE

PART NO: P9060R29-19-X
X=NO. OF WAYS(2-16)

RoHS

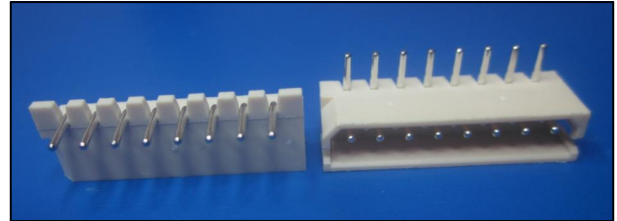

PHYSICAL

INSULATION

MATERIAL : NYLON 66
 FLAMMABILITY : UL94V-0
 COLOR : PANTONE COLOR(7506C)
 CONTACT : COPPER ALLOY, TIN PLATED
PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25° TO +85° C
PROCESS RATING : 230°C FOR 5SEC

DESCRIPTION : WAFER, SHROUDED, 2.5mm PITCH, ROUND PIN,
RIGHT ANGLE

PART NO: P9060R29-19-X
X=NO. OF WAYS(2-16)

ORDERING INFORMATION

P9060R29-19-X
↑
NO OF WAYS
(2-16)

CIRCUIT	DIMENSIONS(mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
A=10	22.50	27.50
B=11	25.00	30.00
C=12	27.50	32.50
D=13	30.00	35.00
E=14	32.50	37.50
F=15	35.00	40.00
G=16	37.50	42.50

MATES WITH

CRIMP TERMINAL WIRE SIZE:
26-30 AWG
P9060S - WAFER
P9060T - TERMINAL

MOQ- ----

SPQ- ----