



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH HOUSING FOR EH CONNECTOR

PART NO: P9064H29-00-X
X=NO. OF WAYS(2-15)

RoHS



PHYSICAL

INSULATION

MATERIAL : NYLON 66
FLAMMABILITY : UL94V-0
COLOR : WHITE COLOR

CONTACT

MATERIAL : COPPER ALLOY

PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC/MIN
CONTACT RESISTANCE : 10m OHMS MAX
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -25° TO +85° C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH HOUSING FOR EH CONNECTOR

PART NO: P9064H29-00-X
X=NO. OF WAYS(2-15)

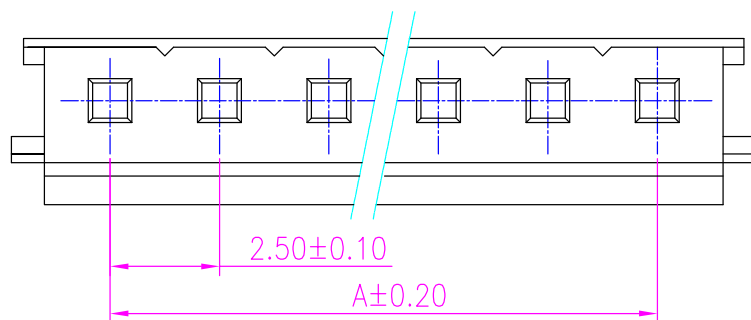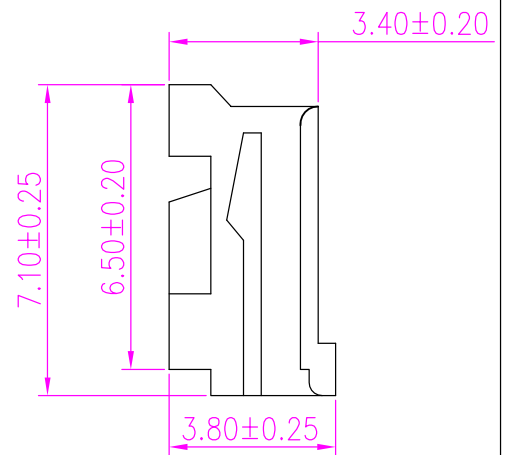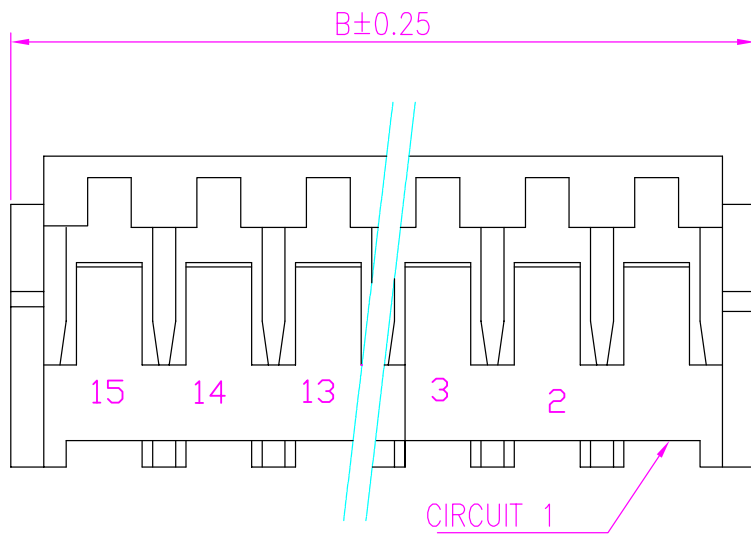

A	ORIGINAL			ANIL	05.05.2008		
REV.	DESCRIPTION			DRN BY	DATE	CKED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.35 mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH HOUSING FOR EH CONNECTOR

PART NO: P9064H29-00-X
X=NO. OF WAYS(2-15)

ORDERING INFORMATION

P9064H29-00-X

NO OF WAYS
(2-15)

PART NO.	DIMENSIONS	
	A	B
P9064H29-00-2	2.50	7.00
P9064H29-00-3	5.00	9.50
P9064H29-00-4	7.50	12.00
P9064H29-00-5	10.00	14.50
P9064H29-00-6	12.50	17.00
P9064H29-00-7	15.00	19.50
P9064H29-00-8	17.50	22.00
P9064H29-00-9	20.00	24.50
P9064H29-00-A	22.50	27.00
P9064H29-00-B	25.00	29.50
P9064H29-00-C	27.50	32.00
P9064H29-00-D	30.00	34.50
P9064H29-00-E	32.50	37.00
P9064H29-00-F	35.00	39.50

MATES WITH

P9064S/ P9064R
P9064T

MOQ- 1000 MIN

SPQ- 1000 PER PACK