


DESCRIPTION : EH CONNECTOR , 2.5MM PITCH, STRAIGHT

PART NO:P9064S29-19-X
X=NO. OF WAYS(2-15)

RoHS

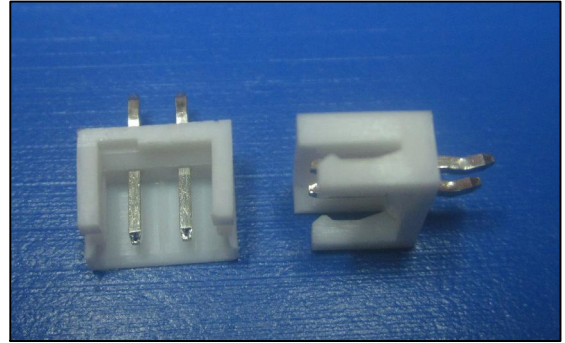

PHYSICAL

INSULATION

MATERIAL : NYLON 66
FLAMMABILITY : UL94V-0
COLOR : NATURAL COLOR

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25° TO +85° C
PROCESS RATING : 230°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : EH CONNECTOR , 2.5MM PITCH, STRAIGHT

PART NO:P9064S29-19-X
X=NO. OF WAYS(2-15)

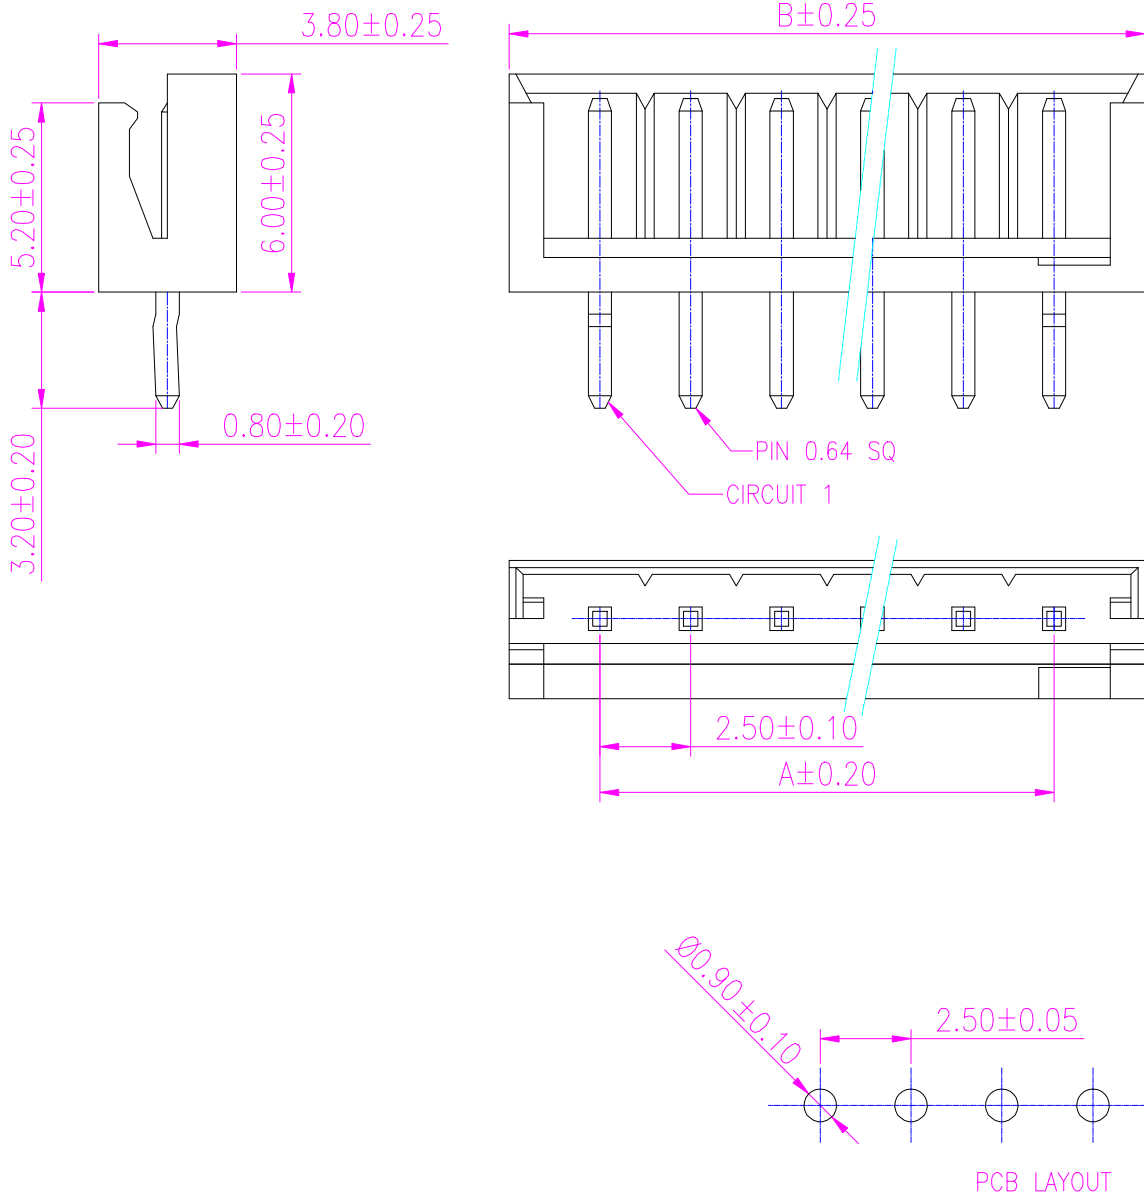

A	ORIGINAL	ANIL	05.04.2008		
REV.		DESCRIPTION	DRN BY	DATE	CKED BY APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.35 mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
----------------------------------------------------------------------------------------------------	------------	---------------	--------------------------	-------------------------------------------------------------

DESCRIPTION : EH CONNECTOR , 2.5MM PITCH, STRAIGHT

PART NO:P9064S29-19-X
X=NO. OF WAYS(2-15)

ORDERING INFORMATION

P9064S29-19-X

NO OF WAYS
(2-15)

PART NO.	DIMENSIONS	
	A	B
P9064S29-19-2	2.50	7.50
P9064S29-19-3	5.00	10.00
P9064S29-19-4	7.50	12.50
P9064S29-19-5	10.00	15.00
P9064S29-19-6	12.50	17.50
P9064S29-19-7	15.00	20.00
P9064S29-19-8	17.50	22.50
P9064S29-19-9	20.00	25.00
P9064S29-19-A	22.50	27.50
P9064S29-19-B	25.00	30.00
P9064S29-19-C	27.50	32.50
P9064S29-19-D	30.00	35.00
P9064S29-19-E	32.50	37.50
P9064S29-19-F	35.00	40.00

MATES WITH

P9064H/ P9064T

MOQ- ----

SPQ- ----