



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RECEPTACLE HOUSING, 3.0mm PITCH, MICROFIT,  
DOUBLE ROW

PART NO: P9066H20-00-X  
X=NO. OF WAYS(2-24)

RoHS



## PHYSICAL

### INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-2
COLOR	:	BLACK COLOR
PACKAGING TYPE	:	BULK PACKING

## ELECTRICAL

CURRENT RATING	:	5A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
CONTACT RESISTANCE	:	10m OHMS MAX
VOLTAGE RATING	:	250V AC/DC

## ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-25° TO +85° C
-------------------	---	----------------



# PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : RECEPTACLE HOUSING, 3.0mm PITCH, MICROFIT,  
DOUBLE ROW

PART NO: P9066H20-00-X  
X=NO. OF WAYS(2-24)

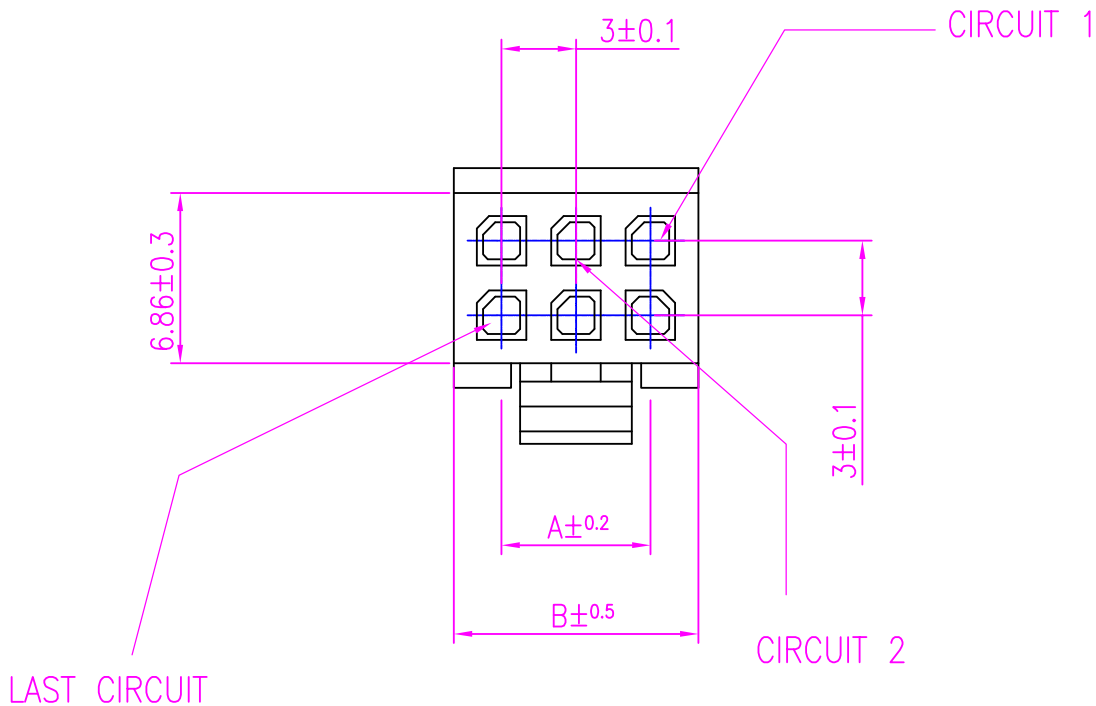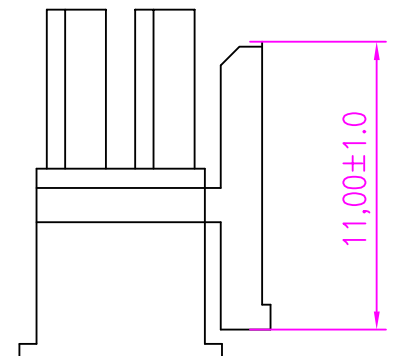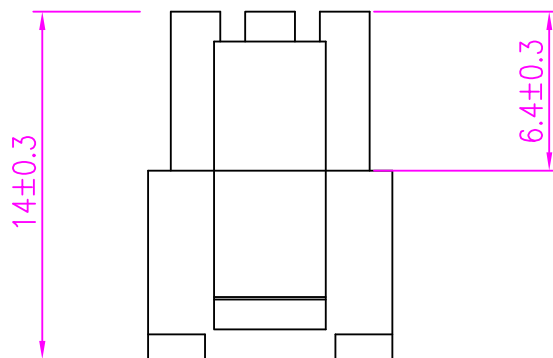

A2	TOLERANCE ADDED	JEEVAN	18.02.2011		
A1	TOP VIEWS OF ALL THE NO. OF WAYS SHOWN	SANDHYA	21.11.2005	SAVITHA	SURINDRA
A	ORIGINAL	ARUN	28.12.2004	SAVITHA	SURINDRA
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.2mm  
±0.2°

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RECEPTACLE HOUSING, 3.0mm PITCH, MICROFIT,  
DOUBLE ROW

PART NO: P9066H20-00-X  
X=NO. OF WAYS(2-24)

### ORDERING INFORMATION

P9066H20-00-X

NO OF WAYS  
(2-24)

CIRCUITS	DIM. A	DIM.B	PART NUMBER
2	--	3.85	P9066H20-00-2
4	3.00	6.85	P9066H20-00-4
6	6.00	9.85	P9066H20-00-6
8	9.00	12.85	P9066H20-00-8
10	12.00	15.85	P9066H20-00-A
12	15.00	18.85	P9066H20-00-C
14	18.00	21.85	P9066H20-00-E
16	21.00	24.85	P9066H20-00-G
18	24.00	27.85	P9066H20-00-I
20	27.00	30.85	P9066H20-00-K
22	30.00	33.85	P9066H20-00-M
24	33.00	36.85	P9066H20-00-O

#### MATES WITH

P9066T SERIES TERMINAL,  
P9066S/R SERIES HEADER

MOQ- ----

SPQ- ----