



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 3.00mm MICROFIT WAFER, SURFACE MOUNT,  
DOUBLE ROW

PART NO: P9066M20-19-XR  
X=NO. OF WAYS(2-24)

RoHS



## PHYSICAL

### INSULATION

MATERIAL	:	LCP
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK COLOR
CONTACT	:	BRASS/TIN PLATED
PACKAGING TYPE	:	BULK PACKING

## ELECTRICAL

CURRENT RATING	:	5A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
CONTACT RESISTANCE	:	10m OHMS MAX
VOLTAGE RATING	:	250V AC/DC

## ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-25° TO +85° C
PROCESS RATING	:	180°C FOR 5SEC



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 3.00mm MICROFIT WAFER, SURFACE MOUNT,  
DOUBLE ROW

PART NO: P9066M20-19-XR  
X=NO. OF WAYS(2-24)

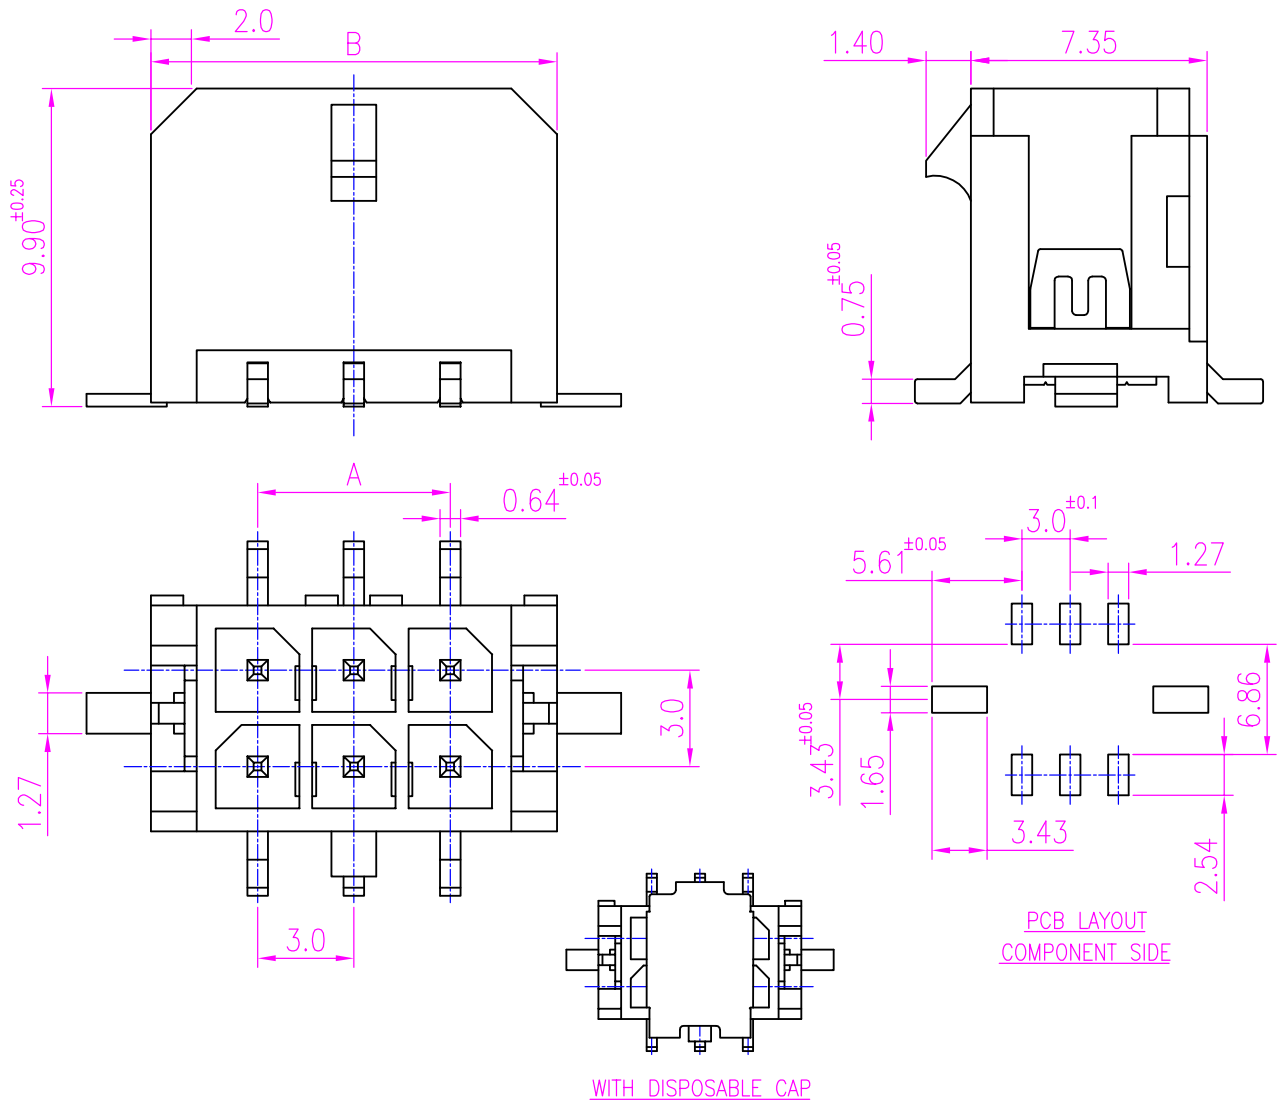

A	ORIGINAL		SANDHYA	12.05.2006		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.15$ mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	

<http://www.protectron.in>  
protectron@protectron.in



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 3.00mm MICROFIT WAFER, SURFACE MOUNT,  
DOUBLE ROW

PART NO: P9066M20-19-XR  
X=NO. OF WAYS(2-24)

## ORDERING INFORMATION

P9066M20-19-XR

NO OF WAYS  
(2-24)

CIRCUIT	PART NO.	DIMENSION	
		A	B
2	P9066M20-19-2R	--	6.65
4	P9066M20-19-4R	3.00	9.65
6	P9066M20-19-6R	6.00	12.65
8	P9066M20-19-8R	9.00	15.65
10	P9066M20-19-AR	12.00	18.65
12	P9066M20-19-CR	15.00	21.65
14	P9066M20-19-ER	18.00	24.65
16	P9066M20-19-GR	21.00	27.65
18	P9066M20-19-IR	24.00	30.65
20	P9066M20-19-KR	27.00	33.65
22	P9066M20-19-MR	30.00	36.65
24	P9066M20-19-OR	33.00	39.65

MATES WITH

P9066H/ P9066T

MOQ- ----

SPQ- ----