




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH HOUSING FOR SOLID HEADER

PART NO: P9067H22-00-X
X=NO. OF WAYS(2-20)

RoHS

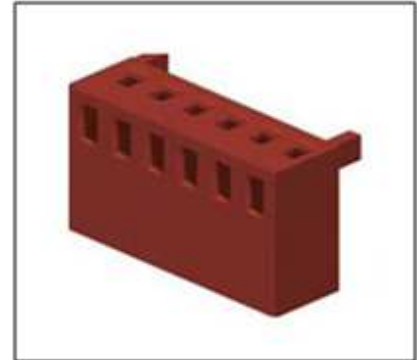

PHYSICAL

INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-2
COLOR	:	RED COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC/MIN
CONTACT RESISTANCE	:	10m OHMS MAX
VOLTAGE RATING	:	250V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-25° TO +85° C
PROCESS RATING	:	230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH HOUSING FOR SOLID HEADER

PART NO: P9067H22-00-X
X=NO. OF WAYS(2-20)

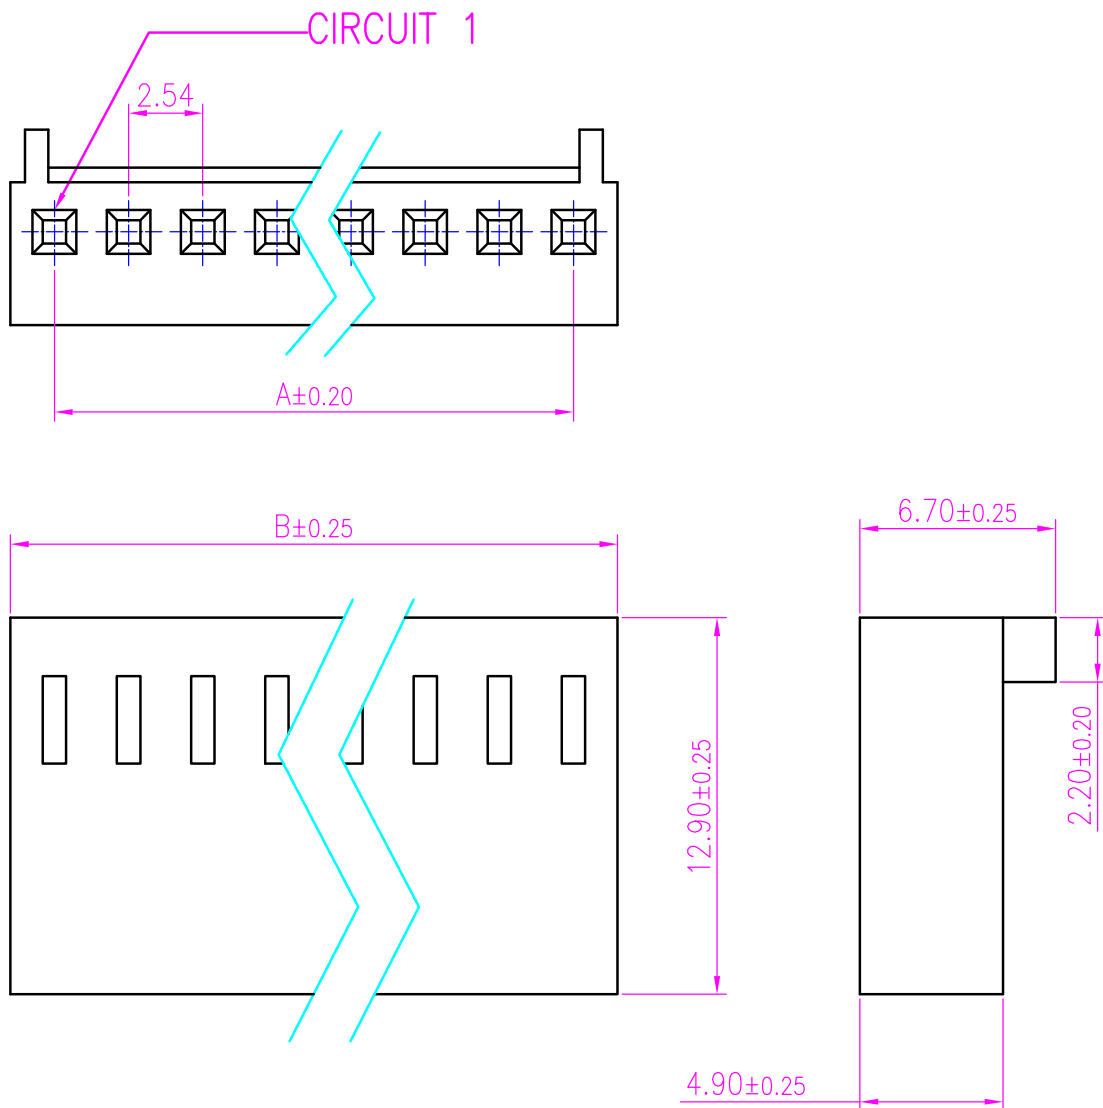

A	ORIGINAL			CHAITRA	07.06.2007			
REV.	DESCRIPTION				DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.			



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH HOUSING FOR SOLID HEADER

PART NO: P9067H22-00-X
X=NO. OF WAYS(2-20)

ORDERING INFORMATION

P9067H22-00-X

NO OF WAYS
(2-20)

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.54	5.68	P9067H22-00-2
3	5.08	8.22	P9067H22-00-3
4	7.62	10.76	P9067H22-00-4
5	10.16	13.30	P9067H22-00-5
6	12.70	15.84	P9067H22-00-6
7	15.24	18.38	P9067H22-00-7
8	17.78	20.92	P9067H22-00-8
9	20.32	23.46	P9067H22-00-9
10	22.86	26.00	P9067H22-00-A
11	25.40	28.54	P9067H22-00-B
12	27.94	31.08	P9067H22-00-C
13	30.48	33.62	P9067H22-00-D
14	33.02	36.16	P9067H22-00-E
15	35.56	38.70	P9067H22-00-F
16	38.10	41.24	P9067H22-00-G
17	40.64	43.78	P9067H22-00-H
18	43.18	46.32	P9067H22-00-I
19	45.72	48.86	P9067H22-00-J
20	48.26	51.40	P9067H22-00-K

MATES WITH

P9067S/ P9067R
P9067T

MOQ- -----

SPQ- -----