


**DESCRIPTION : 2.54mm PITCH FRICTION LOCK SOLID TYPE
CONNECTOR, RIGHT ANGLE**

**PART NO: P9067R22-19-X
X=NO. OF WAYS(2-20)**

RoHS

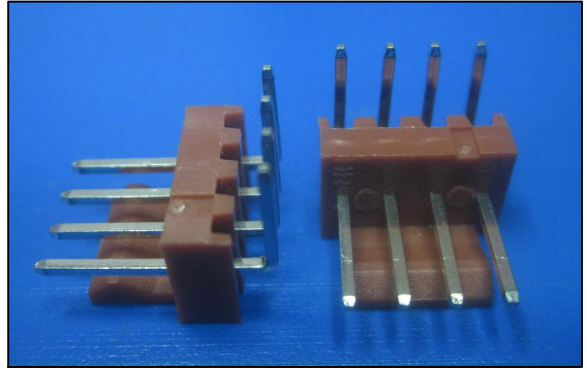

PHYSICAL DATA

INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-2
COLOR	:	RED COLOR
CRIMP TERMINAL	:	BRASS, TIN PLATED
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL DATA

CURRENT RATING	:	4A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	100V AC/MIN
CONTACT RESISTANCE	:	10m OHMS MAX
VOLTAGE RATING	:	250V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-25° TO +85° C
PROCESS RATING	:	230°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH FRICTION LOCK SOLID TYPE CONNECTOR, RIGHT ANGLE

PART NO: P9067R22-19-X
X=NO. OF WAYS(2-20)

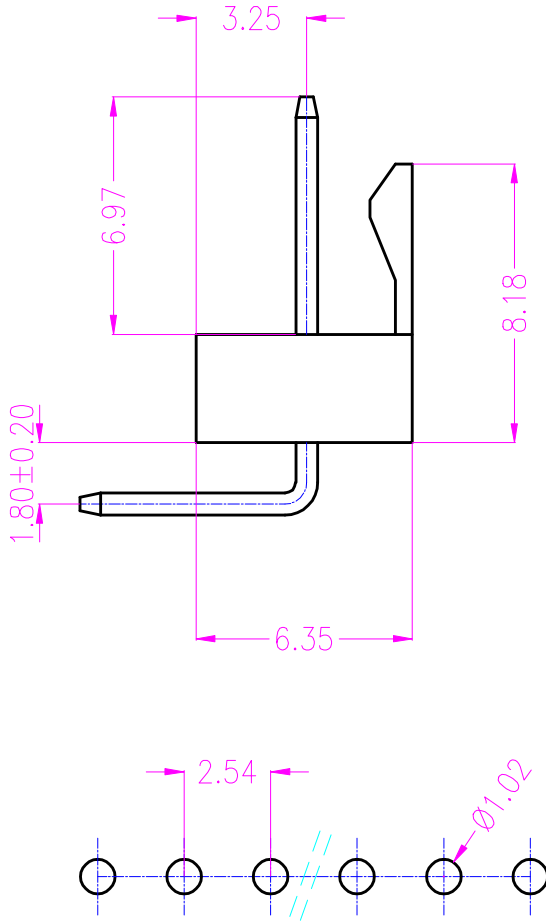

RECOMMENDED PCB LAYOUT

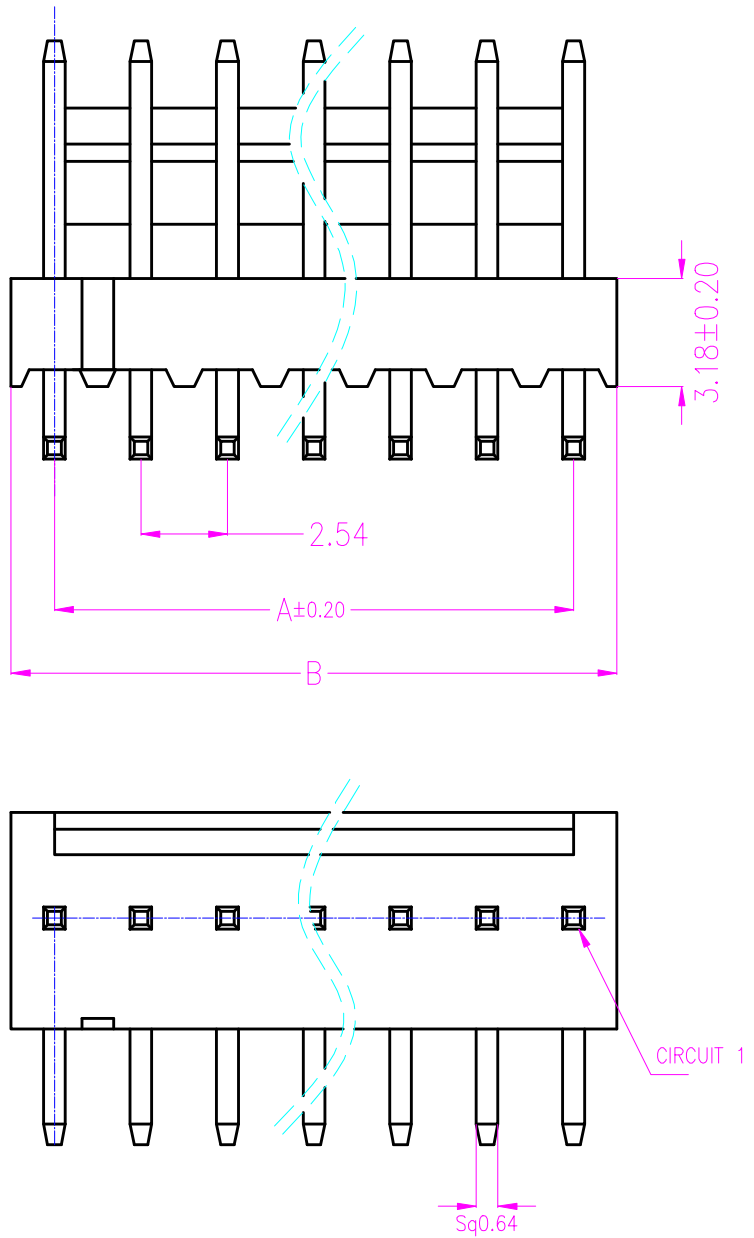

A	ORIGINAL		SUJATHA	03.08.2011		
REV.		DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm ±1°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	---------------------------	---

DESCRIPTION : 2.54mm PITCH FRICTION LOCK SOLID TYPE
CONNECTOR, RIGHT ANGLE

PART NO: P9067R22-19-X
X=NO. OF WAYS(2-20)

ORDERING INFORMATION

P9067R22-19-X

NO. OF WAYS
(2-20)

CONTACT	DIMENSIONS	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
A=10	22.86	25.40
B=11	25.40	27.94
C=12	27.94	30.48
D=13	30.48	33.02
E=14	33.02	35.56
F=15	35.56	38.10
G=16	38.10	40.64
H=17	40.64	43.18
I=18	43.18	45.72
J=19	45.72	48.26
K=20	48.26	50.80

MATES WITH

P9067H SERIES HOUSING
P9067T SERIES TERMINAL

MOQ- ----

SPQ- ----