


**DESCRIPTION : CENTRE PC BOARD CONNECTOR 2.54mm PITCH  
SIDE ENTRY**

**PART NO:P9075R29-19-X  
X=NO. OF WAYS(2-25)**

RoHS

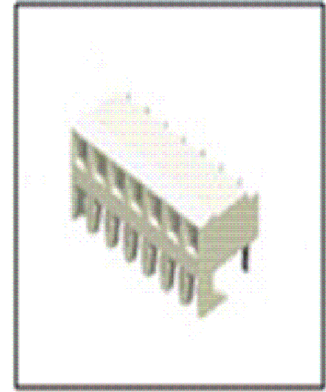

**PHYSICAL**

**INSULATION**

MATERIAL : NYLON 66  
 FLAMMABILITY : UL94V-2  
 COLOR : NATURAL COLOR  
 CONTACT : BRASS, TIN PLATED  
**PACKAGING TYPE** : BULK PACKING

**ELECTRICAL**

**CURRENT RATING** : 3A  
**INSULATION RESISTANCE** : 5000M OHMS MIN  
**DIELECTRIC WITHSTANDING** : 1500V AC/MIN  
**CONTACT RESISTANCE** : 10m OHMS MAX  
**VOLTAGE RATING** : 250V AC/DC

**ENVIRONMENTAL DATA**


**TEMPERATURE RANGE** : -25° TO +85° C  
**PROCESS RATING** : 230°C FOR 5SEC






# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : CENTRE PC BOARD CONNECTOR 2.54mm PITCH  
SIDE ENTRY

PART NO:P9075R29-19-X  
X=NO. OF WAYS(2-25)



Recommended PCB Layout  
(PCB tolerance  $\pm 0.05$ )

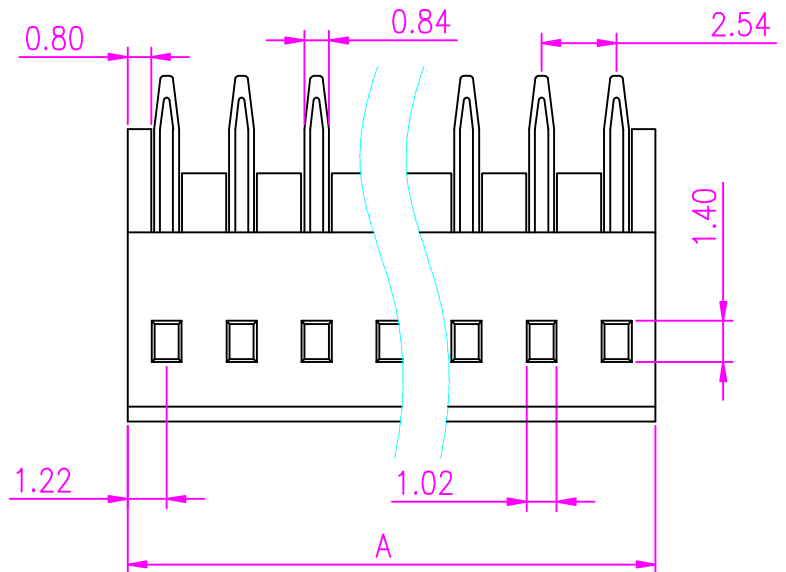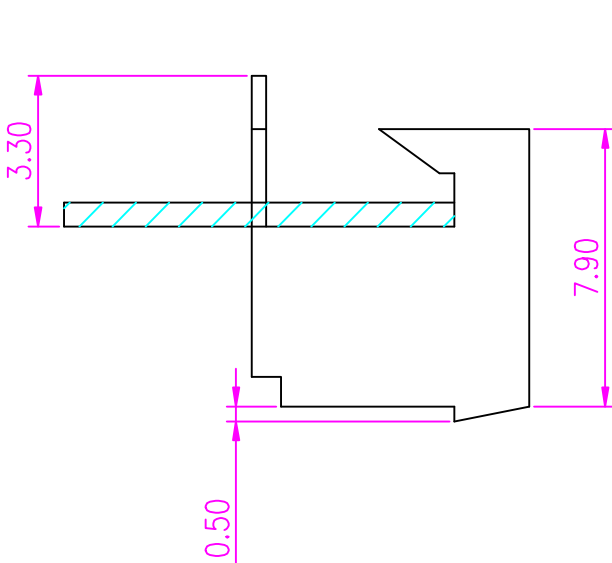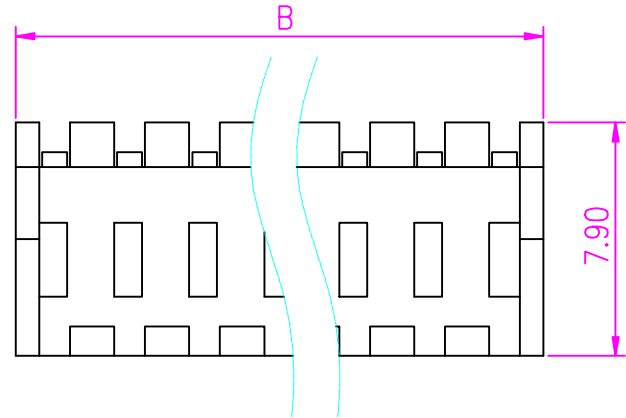

A	ORIGINAL		CHAITRA	12.12.2006		
REV.		DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
	Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.35$ mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	

DESCRIPTION : CENTRE PC BOARD CONNECTOR 2.54mm PITCH  
SIDE ENTRY

PART NO: P9075R29-19-X  
X=NO. OF WAYS(2-25)

ORDERING INFORMATION

P9075R29-19-X  
|  
NO OF WAYS  
(2-25)

Circuits	DIMENSION				
	A±0.20	B±0.20			
2	2.54	5.08	15	35.56	38.10
3	5.08	7.62	16	38.10	40.64
4	7.62	10.16	17	40.64	43.18
5	10.16	12.70	18	43.18	45.72
6	12.70	15.24	19	45.72	48.26
7	15.24	17.78	20	48.26	50.80
8	17.78	20.32	21	50.80	53.34
9	20.32	22.86	22	53.34	55.88
10	22.86	25.40	23	55.88	58.42
11	25.40	27.94	24	58.42	60.96
12	27.94	30.48	25	60.96	63.50
13	30.48	33.02			
14	33.02	35.56			

MOQ- ----

SPQ- ----