




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : WAFER 1.0mm PITCH, DISCONNECTABLE, RIGHT ANGLE, SURFACE MOUNT

PART NO: P9077R29-19-X
X=NO. OF WAYS

RoHS

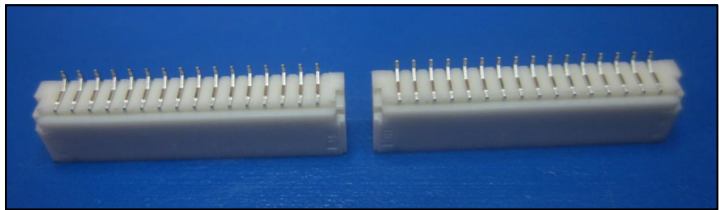

PHYSICAL DATA

INSULATION

MATERIAL : NYLON
FLAMMABILITY : UL94V-0
COLOR : NATURAL COLOR

CONTACT

MATERIAL : COPPER ALLOY/ BRASS
SOLDER TABS : TIN PLATED
PACKAGING TYPE : BULK PACKING

ELECTRICAL DATA

CURRENT RATING : 1A
INSULATION RESISTANCE : 500M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 50V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25°C TO +85°C
PROCESS RATING : 230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : WAFER 1.0mm PITCH, DISCONNECTABLE, RIGHT ANGLE, SURFACE MOUNT

PART NO: P9077R29-19-X
X=NO. OF WAYS

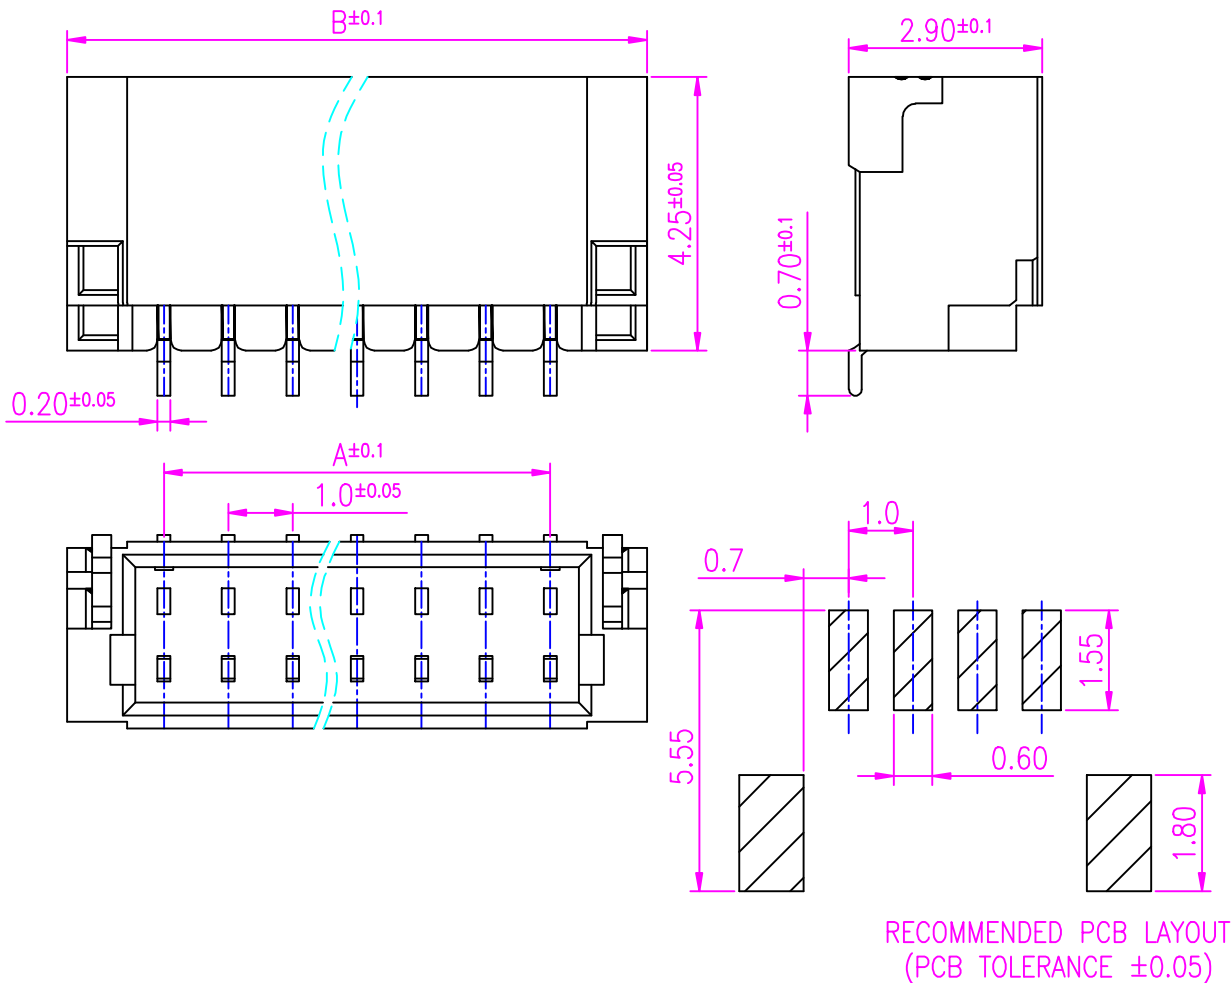

A	ORIGINAL		SANDHYA	25.07.2006		
REV.	DESCRIPTION			DRN BY	DATE	CKED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.1\text{mm}$ $\pm 1'$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : WAFER 1.0mm PITCH, DISCONNECTABLE, RIGHT ANGLE, SURFACE MOUNT

PART NO: P9077R29-19-X
X=NO. OF WAYS

ORDERING INFORMATION

P9077R29-19-X

NO OF CONTACTS

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
02	1.00	4.00	P9077R29-19-2
03	2.00	5.00	P9077R29-19-3
04	3.00	6.00	P9077R29-19-4
05	4.00	7.00	P9077R29-19-5
06	5.00	8.00	P9077R29-19-6
07	6.00	9.00	P9077R29-19-7
08	7.00	10.00	P9077R29-19-8
09	8.00	11.00	P9077R29-19-9
10	9.00	12.00	P9077R29-19-A
11	10.00	13.00	P9077R29-19-B
12	11.00	14.00	P9077R29-19-C
13	12.00	15.00	P9077R29-19-D
14	13.00	16.00	P9077R29-19-E
15	14.00	17.00	P9077R29-19-F
16	15.00	18.00	P9077R29-19-G
17	16.00	19.00	P9077R29-19-H
18	17.00	20.00	P9077R29-19-I
19	18.00	21.00	P9077R29-19-J
20	19.00	22.00	P9077R29-19-K

MATES WITH

P9077H / P9077T

MOQ- ----

SPQ- ----