




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.0mm PITCH SH CONNECTOR, STRAIGHT SMT
TYPE

PART NO: P9077S29-19-X
X=NO. OF CONTACTS

RoHS

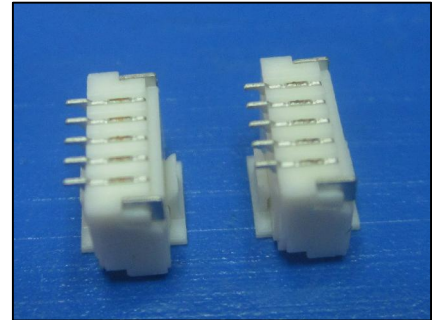

PHYSICAL DATA

INSULATION

MATERIAL : NYLON 6T
FLAMMABILITY : UL94V-0
COLOR : NATURAL COLOR

CONTACT

MATERIAL : PHOSPHOR BRONZE
SOLDER TAILS : TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

CURRENT RATING : 1A AC/DC
INSULATION RESISTANCE : 100M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 50V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25°C TO +85°C
PROCESS RATING : 230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.0mm PITCH SH CONNECTOR, STRAIGHT SMT TYPE

PART NO: P9077S29-19-X
X=NO. OF CONTACTS

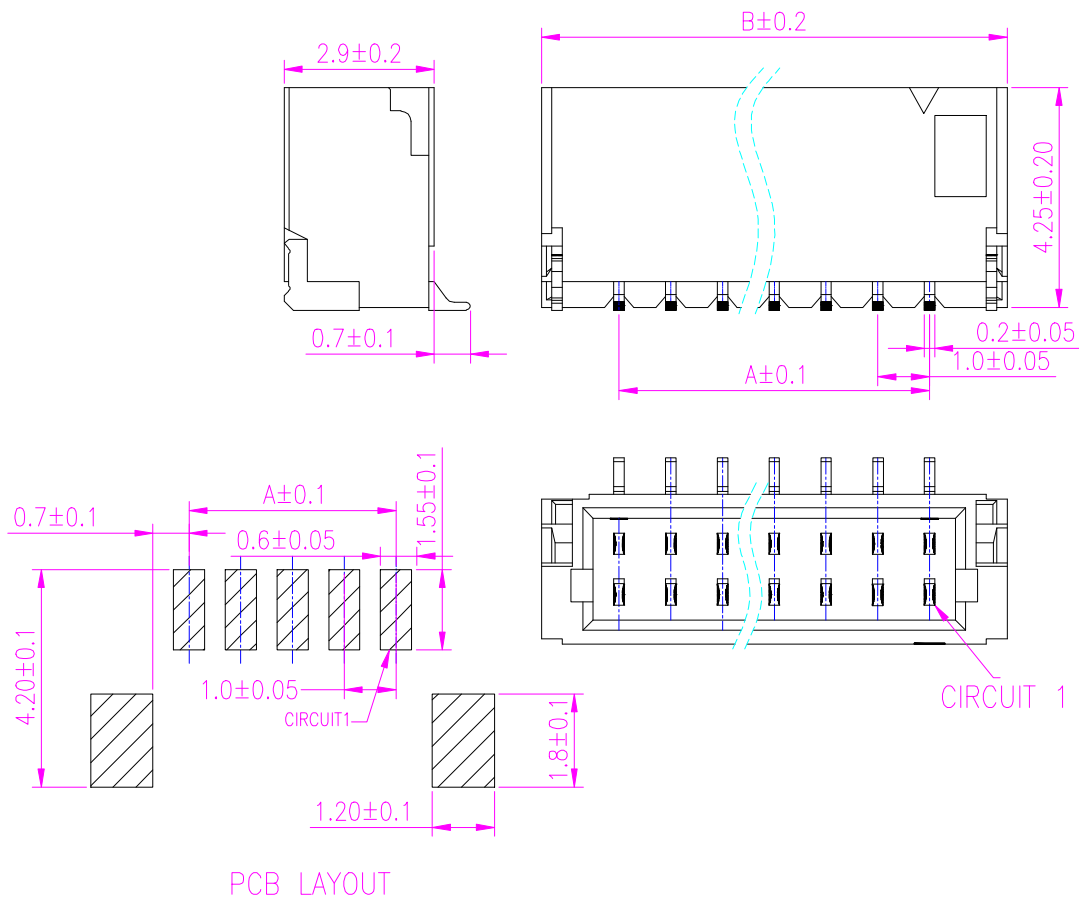

A	ORIGINAL		ANIL	21.08.2008		
REV.	DESCRIPTION			DRN BY	DATE	CKED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.35 mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.0mm PITCH SH CONNECTOR, STRAIGHT SMT
TYPE

PART NO: P9077S29-19-X
X=NO. OF CONTACTS

ORDERING INFORMATION

P9077S29-19-X
NO OF CONTACTS

DIMENSION		PART NUMBER
A	B	
1.00	4.00	P9077S29-19-2
2.00	5.00	P9077S29-19-3
3.00	6.00	P9077S29-19-4
4.00	7.00	P9077S29-19-5
5.00	8.00	P9077S29-19-6
6.00	9.00	P9077S29-19-7
7.00	10.00	P9077S29-19-8
8.00	11.00	P9077S29-19-9
9.00	12.00	P9077S29-19-A
10.00	13.00	P9077S29-19-B
11.00	14.00	P9077S29-19-C
12.00	15.00	P9077S29-19-D
13.00	16.00	P9077S29-19-E
14.00	17.00	P9077S29-19-F
15.00	18.00	P9077S29-19-G
16.00	19.00	P9077S29-19-H
17.00	20.00	P9077S29-19-I
18.00	21.00	P9077S29-19-J
19.00	22.00	P9077S29-19-K

MATES WITH

P9077H / P9077T

MOQ- ----

SPQ- ----