



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.54mm PITCH, DUAL ROW,
STRAIGHT DOUBLE DECKER

PART NO: P9108-XXD12-1
1st XX=NO OF CONTACTS(2-80)

RoHS



PHYSICAL

INSULATION

MATERIAL	:	GLASS FILLED POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	10000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA

PIN RETENTION FORCE	:	10N/1 Kg. MIN.
---------------------	---	----------------

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.54mm PITCH, DUAL ROW,
STRAIGHT DOUBLE DECKER

PART NO: P9108-XXD12-1
1st XX=NO OF CONTACTS(2-80)

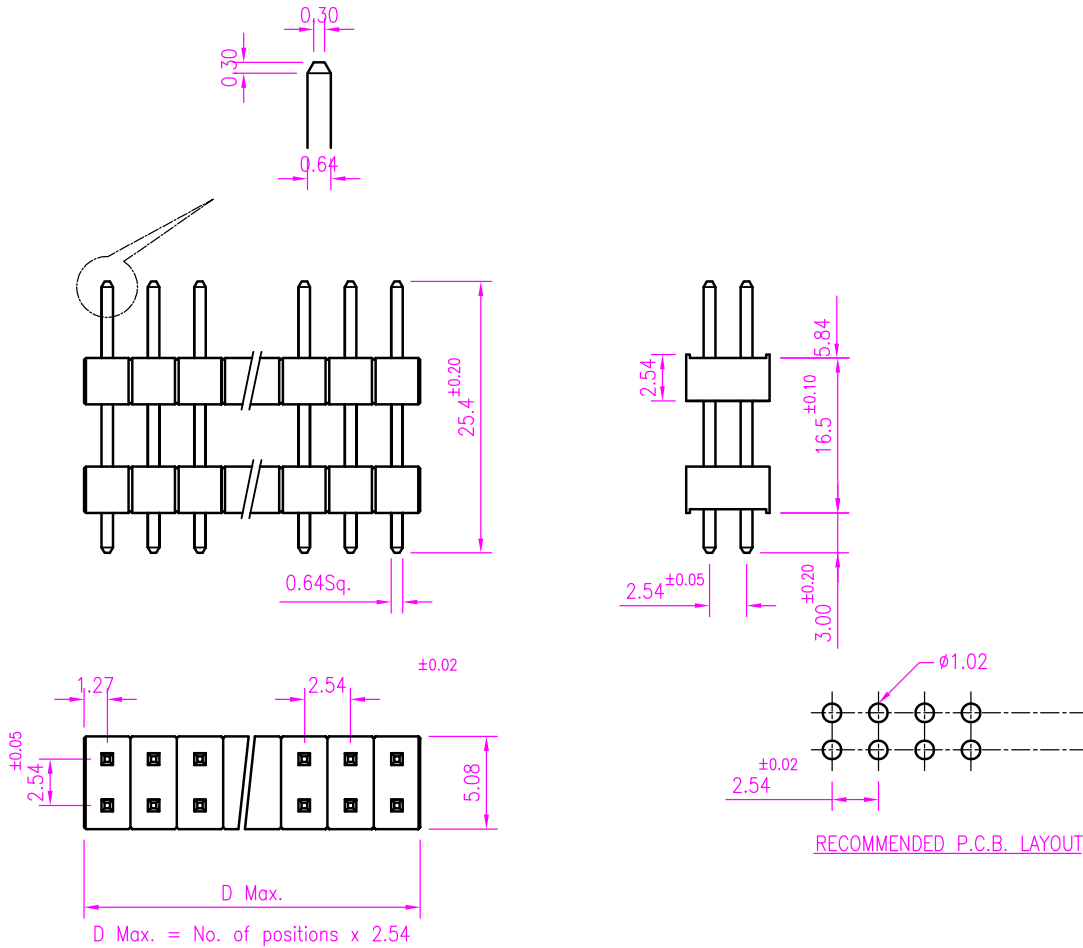

MATES WITH
P9403,P9404,P9403A
P9404A,P9503,P9410
P9405,P9403I,P9303I
P9306

ORDERING INFORMATION

P9108-XXD12-1

NO OF CONTACTS
(2-80)

MOQ- ----
SPQ- ----

FOE DIFFERENT PLATING AND PIN LENGTH, CONTACT FACTORY

A	ORIGINAL	SACHIN	06.07.2005		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.2mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	-------------------	---