



PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : PIN HEADER, 2.54mm PITCH, SINGLE ROW,
STRAIGHT DOUBLE DECKER**

PART NO:P9109-XXE11-1
1st XX=NO OF CONTACTS(1-40)

RoHS



PHYSICAL

INSULATION

MATERIAL	:	GLASS FILLED POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	10000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA

PIN RETENTION FORCE	:	10N/1 Kg. MIN.
---------------------	---	----------------

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : PIN HEADER, 2.54mm PITCH, SINGLE ROW,
STRAIGHT DOUBLE DECKER**

PART NO: P9109-XXE11-1
1st XX=NO OF CONTACTS(1-40)

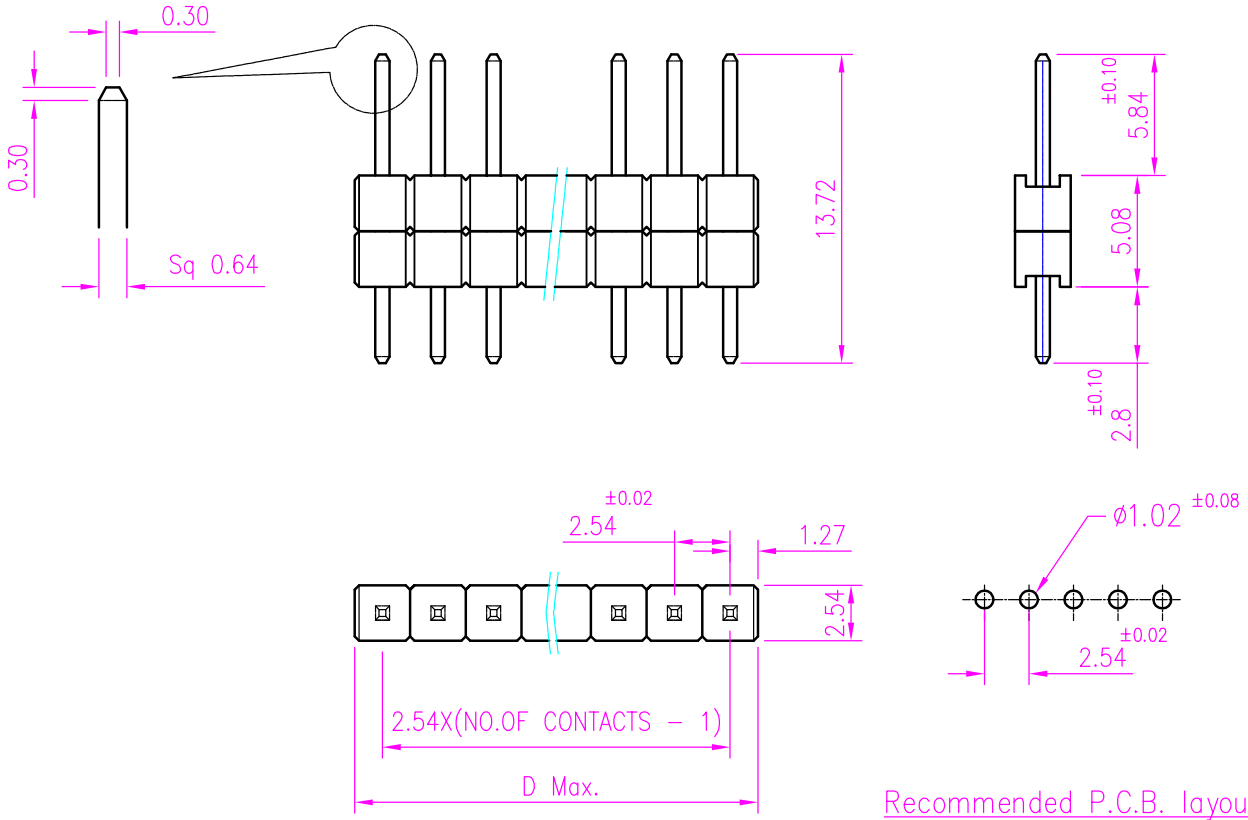

$D\ Max. = No. OF POSITIONS \times 2.54$

MATES WITH
P9401,P9402,P9401A
P9402A,P9401I,P9409
P9406,P9501,P9502
P9301,P9305

ORDERING INFORMATION

P9109-XXE11-1

NO OF CONTACTS
(1-40)

MOQ- ----
SPQ- ----

FOE DIFFERENT PLATING AND PIN LENGTH, CONTACT FACTORY

A	ORIGINAL		SIDDU	28.09.2007		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.2mm$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	