




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.54mm PITCH, TRIPLE ROW STRAIGHT

PART NO: P910TXXX-12-1
1st XXX=NO OF CONTACTS(9-120)

RoHS

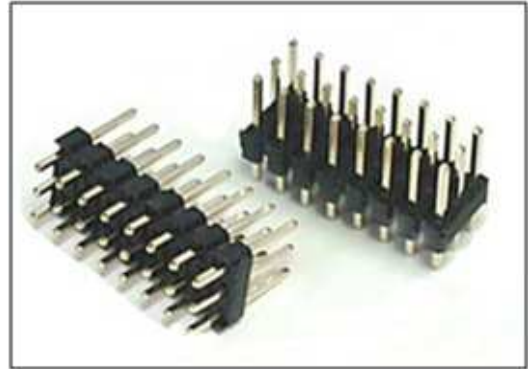

PHYSICAL

INSULATION

MATERIAL	:	GLASS FILLED POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD FLASH
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	1000M OHMS MIN
CONTACT RESISTANCE	:	20m OHMS MAX
DIELECTRIC WITHSTANDING	:	1000V AC/MIN

MECHANICAL DATA

PIN RETENTION FORCE	:	10N/1 Kg. MIN.
---------------------	---	----------------

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.54mm PITCH, TRIPLE ROW STRAIGHT

PART NO: P910TXXX-12-1
1st XXX=NO OF CONTACTS(9-120)

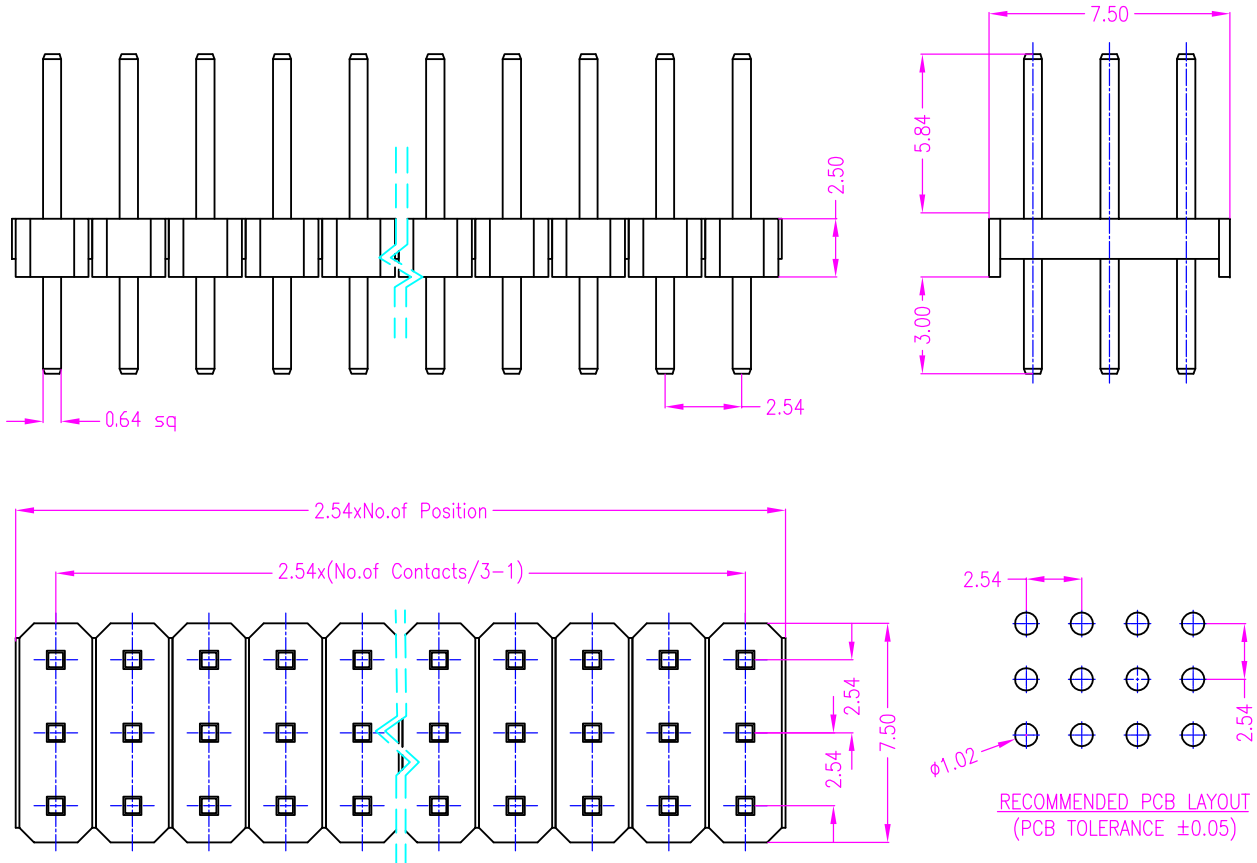

ORDERING INFORMATION

P910TXXX-12-1

NO OF CONTACTS
(9-120)

MOQ- ----
SPQ- ----

A1	TOLERANCE INCLUDED	CHETAN	31.05.2011		
A	ORIGINAL	SACHIN	21.10.2004		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>
protectron@protectron.in