



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm pitch(0.079") Pin Header Double Row
Right Angle

PART NO: P9114XXX-XX-1

X=H=-=1.50mm, H=A=2.0mm
XX=NO. OF CONTACTS(4-80)
XX=ABOVE AND BELOW LENGTHS

RoHS



PHYSICAL

INSULATION	:	
MATERIAL	:	POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK
CONTACT	:	
MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC

MECHANICAL DATA

PIN RETENTION FORCE	:	8N AVERAGE(0.8kg)
---------------------	---	-------------------

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm pitch(0.079") Pin Header Double Row
Right Angle

PART NO: P9114XXX-XX-1

X=H=-=1.50mm, H=A=2.0mm
XX=NO. OF CONTACTS(4-80)
XX=ABOVE AND BELOW LENGTHS

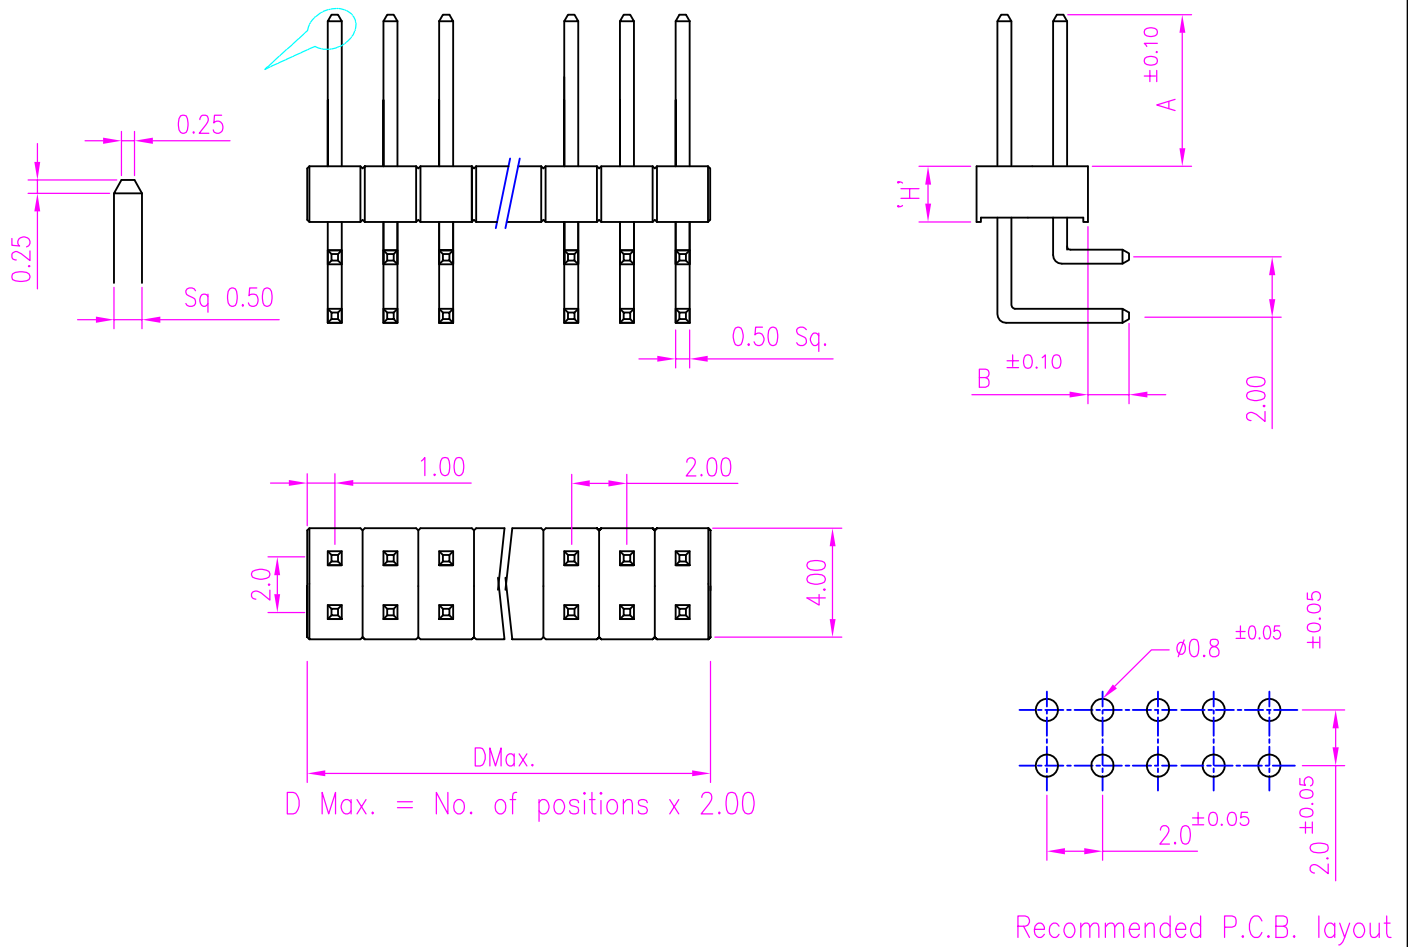

A	ORIGINAL			SACHIN	05.2.2004		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : 2.00mm pitch(0.079") Pin Header Double Row
Right Angle

PART NO: P9114XXX-XX-1

X=H=-=1.50mm, H=A=2.0mm
XX=NO. OF CONTACTS(4-80)
XX=ABOVE AND BELOW LENGTHS

ORDERING INFORMATION

P9114XXX-XX-1

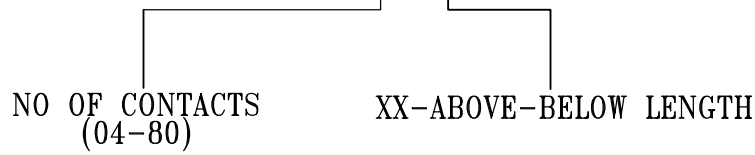

XX=Above Below Length

XX	A	B
01	3.20	2.80
02	3.20	3.50
11	4.00	2.80
15	4.00	2.40
1A	4.00	3.20

MATES WITH

P9413, P9414

MOQ- ----

SPQ- ----