



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.0mm PITCH, SINGLE ROW,
STRAIGHT, DOUBLE DECKER

PART NO: P9119-XXM17-1
XX=NO. OF CONTACTS

RoHS



PHYSICAL

INSULATION

MATERIAL : GLASS FILLED POLYESTER
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
SOLDER TAILS : GOLD PLATED
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 10000M OHMS MIN
DIELECTRIC WITHSTANDING : 1000V AC FOR 1 MINUTE

MECHANICAL DATA

PIN RETENTION FORCE : 1kg. MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.0mm PITCH, SINGLE ROW, STRAIGHT, DOUBLE DECKER

PART NO: P9119-XXM17-1
XX=NO. OF CONTACTS

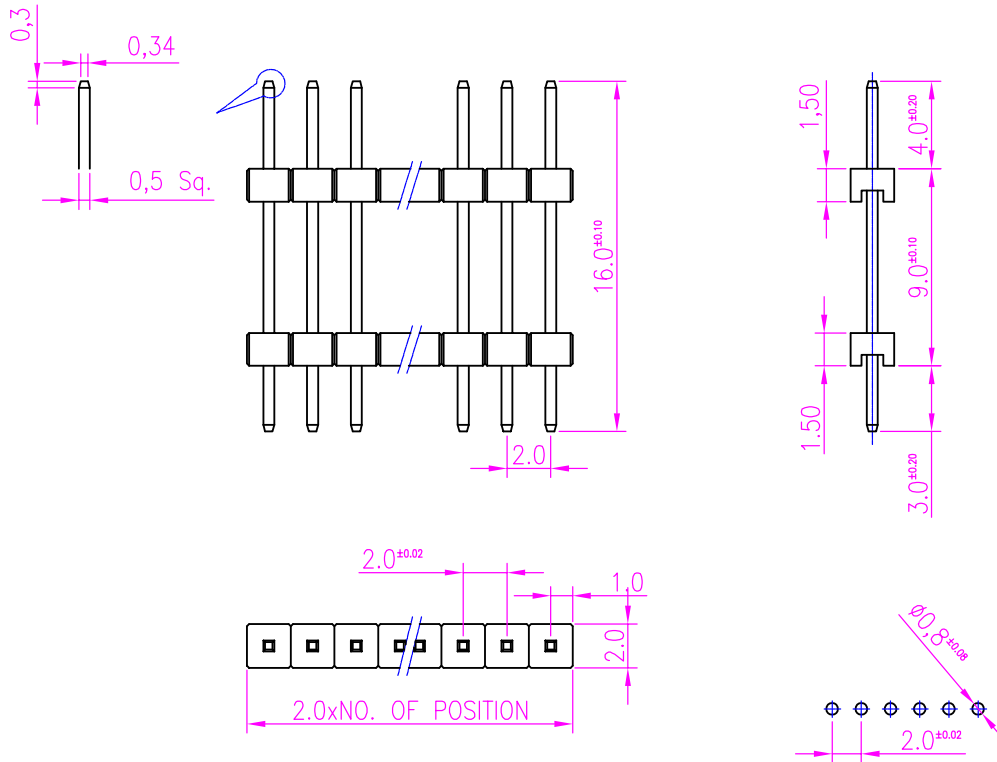

Recommended P.C.B. layout

MATES WITH

P9411, P9411A
P941S, P9412A
P9416

ORDERING INFORMATION

P9119-XXM17-1


NO OF CONTACTS
(02-40)

MOQ- ----
SPQ- ----

FOR DIFFERENT PIN LENGTH AND PLATING, CONTACT FACTORY

A	ORIGINAL		SIDDU	18.04.2007		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.