




# PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : 1.27mm PITCH PIN HEADER SMD TYPE  
DUAL ROW**

**PART NO: P9135-XXX3A-X**

XXX=NO. OF CONTACTS  
X=TYPE OF PLATING

RoHS

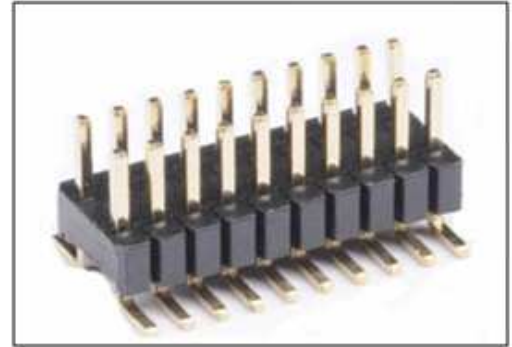

## PHYSICAL

### INSULATION

MATERIAL : POLYESTER  
FLAMMABILITY : UL94V-0  
COLOR : BLACK

### CONTACT

MATERIAL : PHOSPHOR BRONZE OR BRASS  
SOLDER TAILS : REFER TABLE  
PACKAGING TYPE : TUBE/TRAY

## ELECTRICAL

CURRENT RATING : 1A  
INSULATION RESISTANCE : 5000M OHMS MIN  
DIELECTRIC WITHSTANDING : 500V AC

## ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C  
PROCESS RATING : 180°C FOR 5SEC







# PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : 1.27mm PITCH PIN HEADER SMD TYPE  
DUAL ROW**

**PART NO: P9135-XXX3A-X**

XXX=NO. OF CONTACTS  
X=TYPE OF PLATING

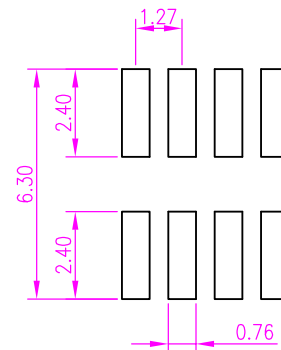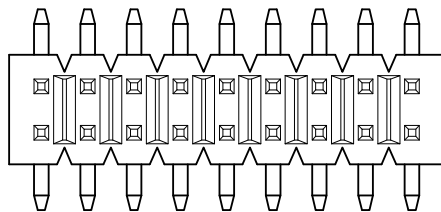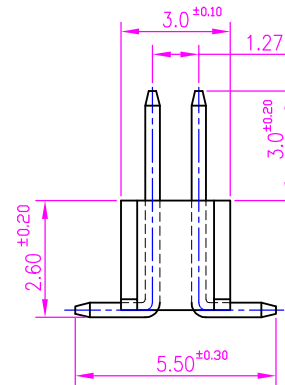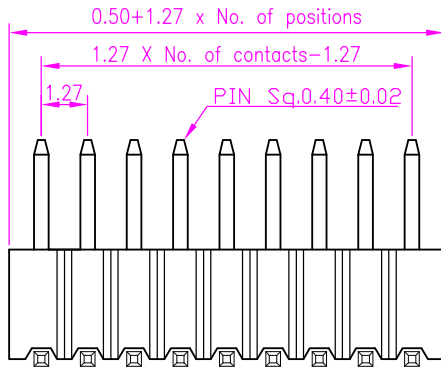

RECOMMENDED P.C.BOARD LAYOUT

## ORDERING INFORMATION

P9135-XXX3A-X

NO OF CONTACTS

PLATING

1=GOLD FLASH

2=0.75μ GOLD

3=SELECTIVE

MATES WITH

P9433,P9435

MOQ- ----

SPQ- ----

A ORIGINAL

SACHIN

27.06.2003

REV.

DESCRIPTION

DRN. BY

DATE

CK'ED BY

APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.3mm  
±2°

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.