




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW
SURFACE MOUNT, DOUBLE DECKER

PART NO: P915C-XXXP2F-1
XXX=NO. OF CONTACTS(4-80)

RoHS

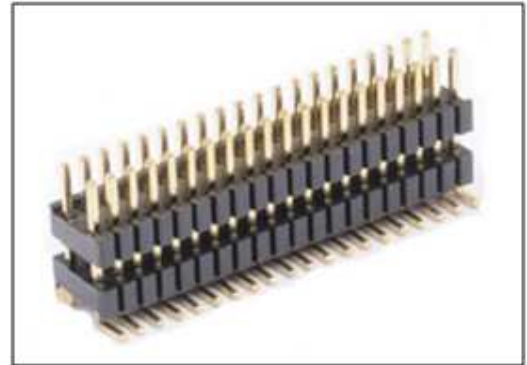

PHYSICAL

INSULATION

MATERIAL : POLYESTER
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : BRASS
SOLDER TAILS : GOLD PLATED
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 0.5A
INSULATION RESISTANCE : 1000M OHMS AT V=100V
DIELECTRIC WITHSTANDING : 300V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE : GOLD PLATED = -55° TO +105°C
TIN PLATED = -40°C TO +105°C
PROCESS RATING : 260°C/10Sec



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 0.8mm PITCH, DOUBLE ROW
SURFACE MOUNT, DOUBLE DECKER

PART NO: P915C-XXXP2F-1
XXX=NO. OF CONTACTS(4-80)

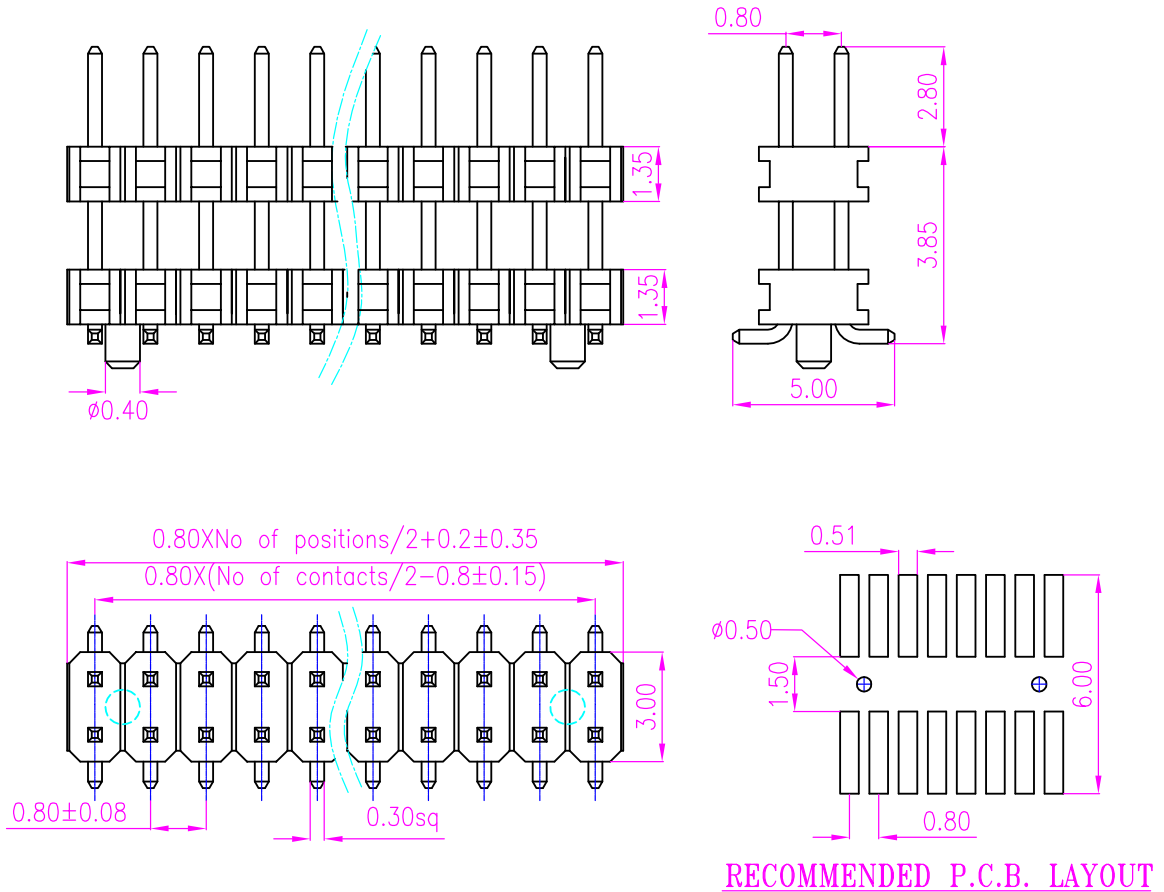

ORDERING INFORMATION

P915C-XXXP2F-1
|
NO OF CONTACTS
(4-80)

MOQ- ----
SPQ- ----

A	ORIGINAL	CHAITRA	11.12.2007		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.35 mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.