




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, TRIPLE ROW, 3.2mm TAIL

PART NO:P940TXXX-21
XXX=NO. OF CONTACTS(9-120)

RoHS

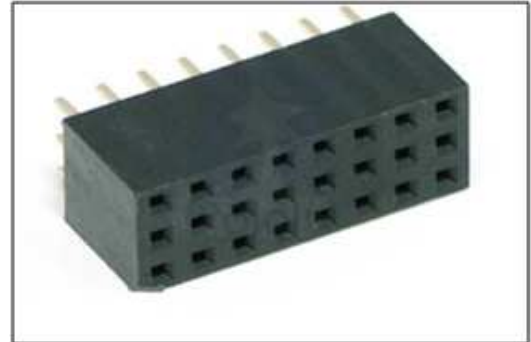

PHYSICAL

INSULATION

MATERIAL	:	GLASS FILLED THERMOPLASTIC POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	PHOSPHOR BRONZE
SOLDER TAILS	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX

MECHANICAL DATA

INSERTION FORCE	:	200g max.
EXTRACTION FORCE	:	20g min.
MECHANICAL LIFE	:	100 CYCLES min.

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	200°C for 5sec



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54mm PITCH, TRIPLE ROW, 3.2mm TAIL

PART NO: P940TXXX-21
XXX=NO. OF CONTACTS(9-120)

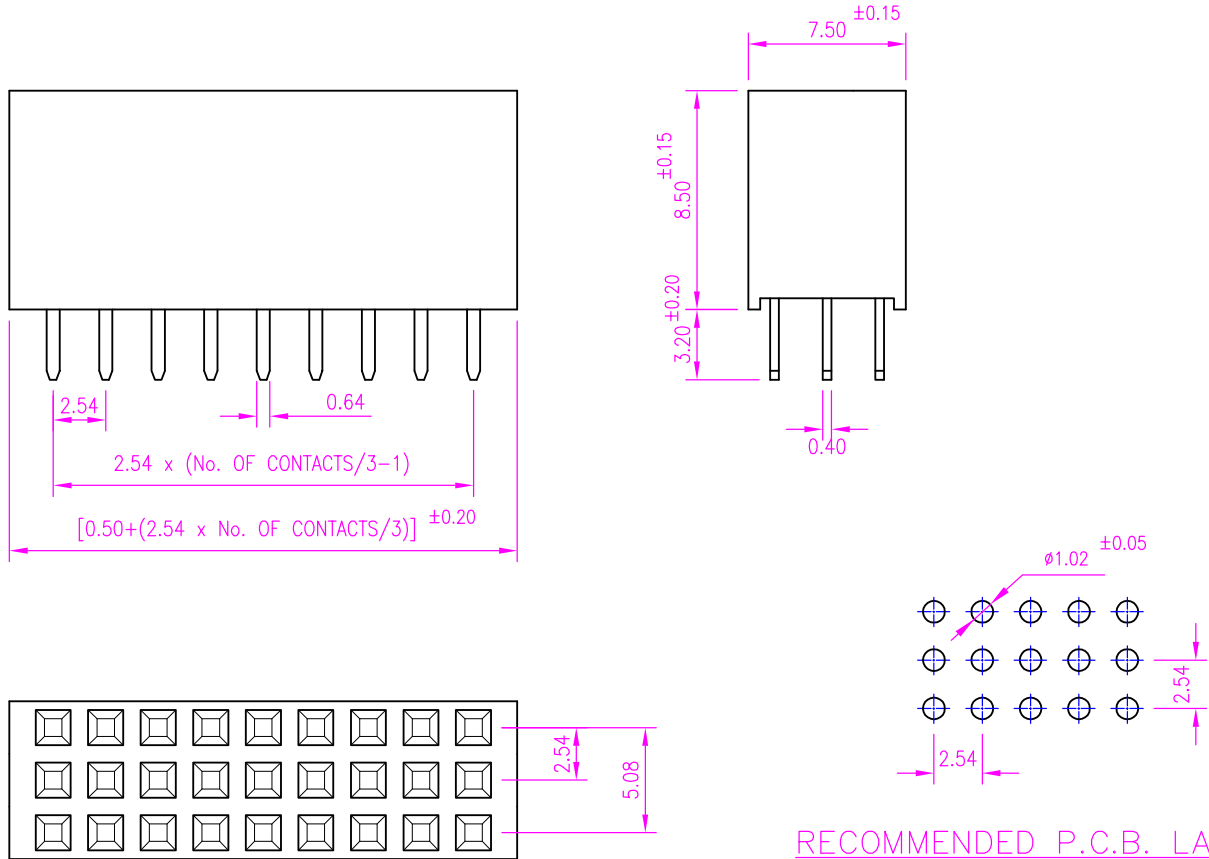

RECOMMENDED P.C.B. LAYOUT

ORDERING INFORMATION

P940TXXX-21

NO OF CONTACTS
(9-120)

MOQ- ----

SPQ- ----

A	ORIGINAL	SACHIN	03.01.2004		
REV.	DESCRIPTION		DRN. BY	DATE	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	--------------------	---