




PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : FEMALE HEADER 2.0mm PITCH DOUBLE ROW,
BASE TOP ENTRY**

PART NO: P9415-XX-2X

1st XX=NO. OF CONTACTS
2nd 2X=TYPE OF PLATING

RoHS

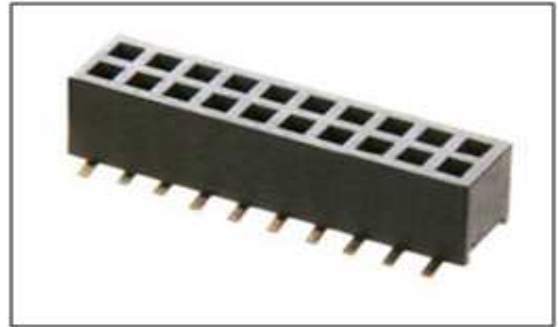

PHYSICAL

INSULATION

MATERIAL	:	NYLON 6T/POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	PHOSPHOR BRONZE
SOLDER TAILS	:	REFER TABLE
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC
CONTACT RESISTANCE	:	20m OHMS MAX
VOLTAGE RATING	:	250V AC RMS MAX

MECHANICAL DATA

INSERTION FORCE	:	0.7N AVG.
WITHDRAWAL FORCE	:	0.5N AVG.

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	180°C FOR 5SEC







PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : FEMALE HEADER 2.0mm PITCH DOUBLE ROW,
BASE TOP ENTRY**

PART NO: P9415-XX-2X

1st XX=NO. OF CONTACTS
2nd 2X=TYPE OF PLATING

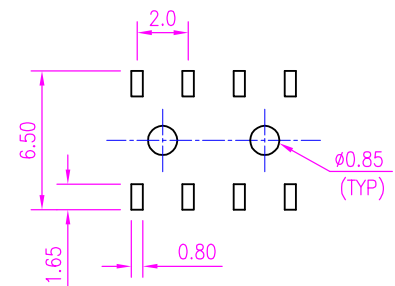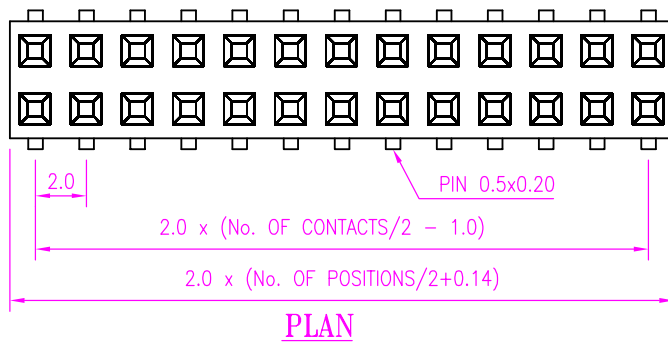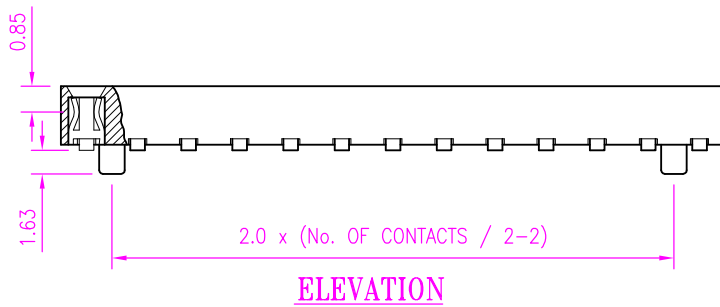

A	ORIGINAL		SACHIN	25.06.2003		
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : FEMALE HEADER 2.0mm PITCH DOUBLE ROW,
BASE TOP ENTRY

PART NO: P9415-XX-2X

1st XX=NO. OF CONTACTS
2nd 2X=TYPE OF PLATING

ORDERING INFORMATION

P9415-XX-2X

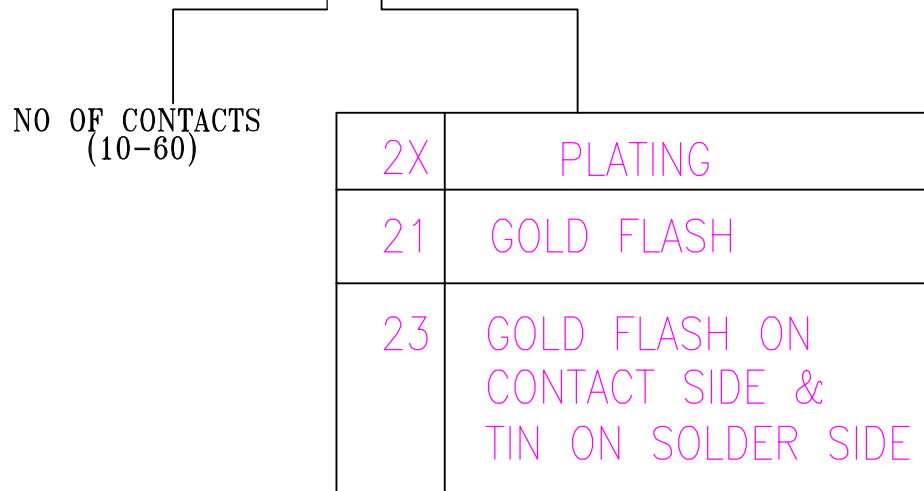

MATES WITH

P9113,P9114
P9115,P9118

MOQ- ----

SPQ- ----