




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm FEMALE HEADER SMD TYPE DUAL
ROW

PART NO: P9435AXXX-21
XXX=NO. OF CONTACTS(6-100)

RoHS

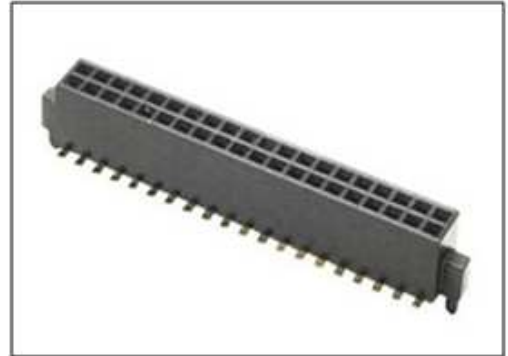

PHYSICAL

INSULATION

MATERIAL : LCP OR NYLON-6T
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : PHOSPHOR BRONZE
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm FEMALE HEADER SMD TYPE DUAL ROW

PART NO: P9435AXXX-21
XXX=NO. OF CONTACTS(6-100)

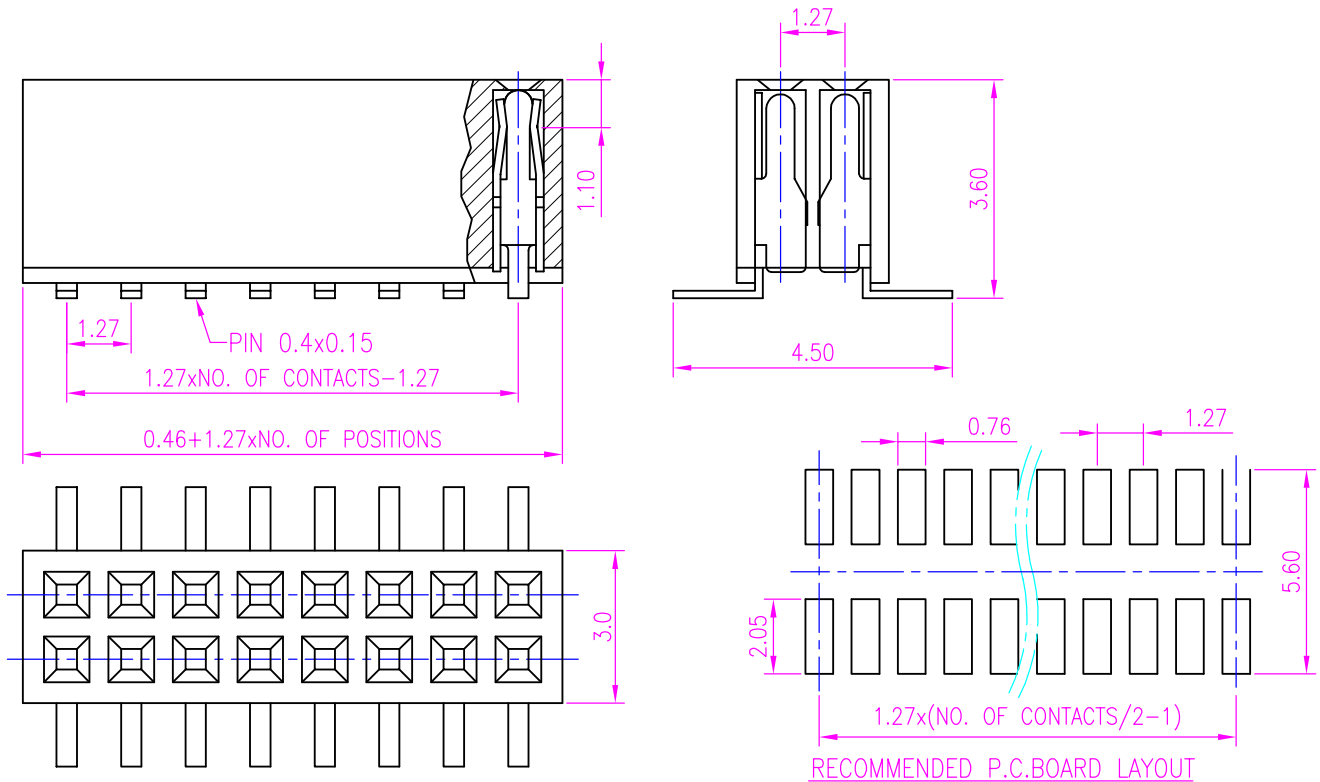

MATES WITH

P9133, P9134
P9135

ORDERING INFORMATION

P9435AXXX-21

NO OF CONTACTS
(6-100)

MOQ- ----
SPQ- ----

A	ORIGINAL	SACHIN	02.09.2003		
REV.	DESCRIPTION		DRN. BY	DATE	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.