




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943DXXX4-2X

1st X=1=SINGLE ROW/B=DOUBLE ROW
2nd XXX=NO. OF CONTACTS(6-40NOS)
3rd X=TYPE OF PLATING

RoHS

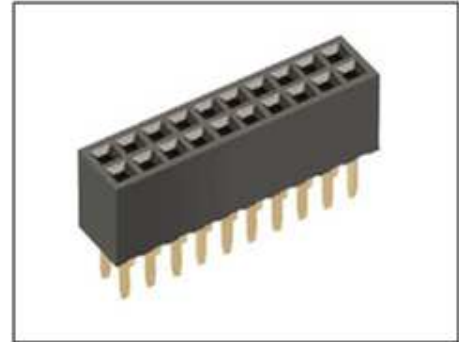

PHYSICAL

INSULATION

MATERIAL : POLYESTER
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : PHOSPHOR BRONZE
SOLDER TAILS : REFER TABLE
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943DXXX4-2X

1st X=1=SINGLE ROW/B=DOUBLE ROW
 2nd XXX=NO. OF CONTACTS(6-40NOS)
 3rd X=TYPE OF PLATING

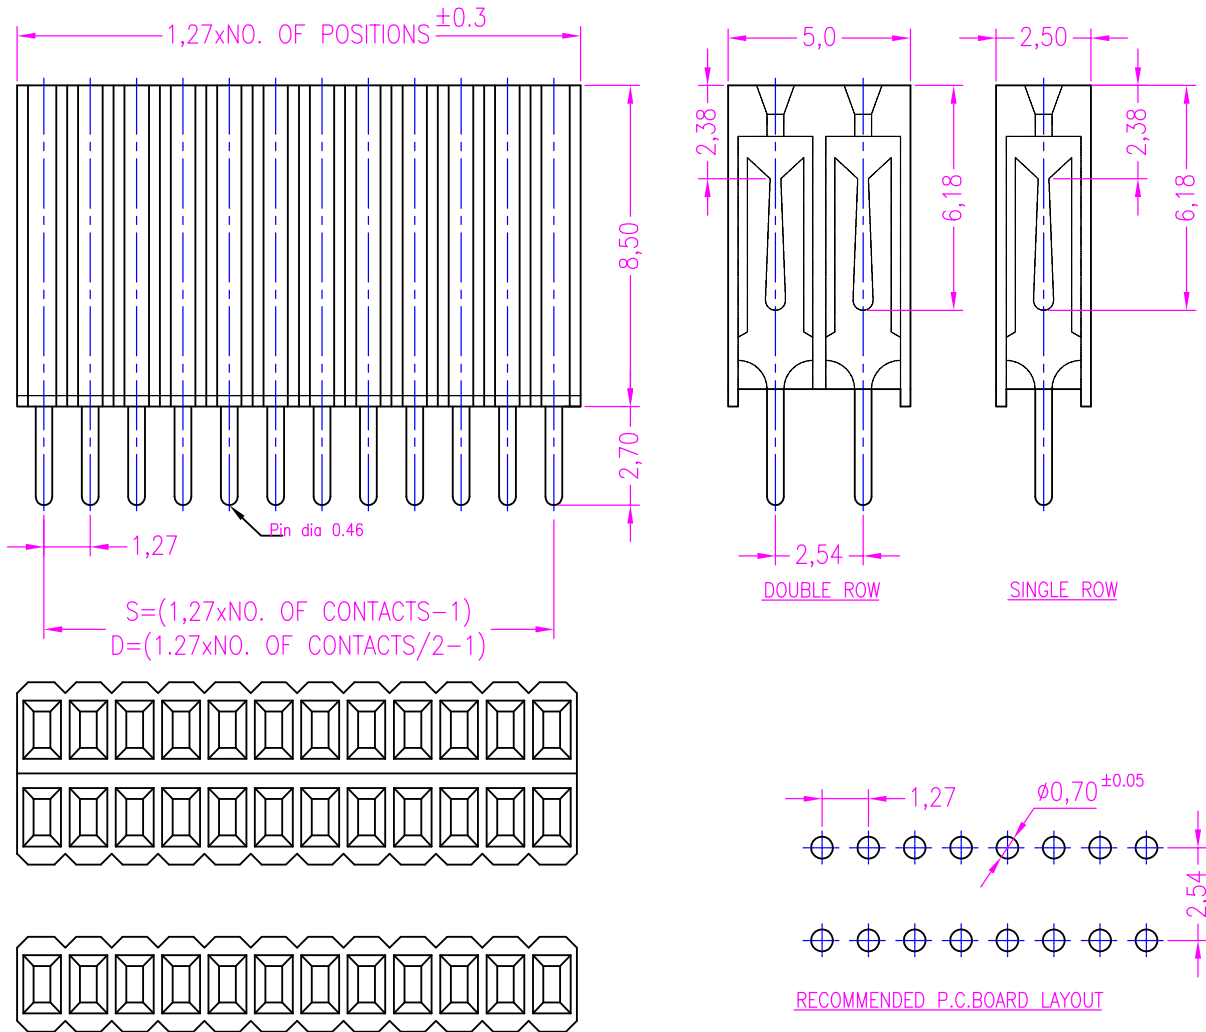

A	ORIGINAL	SACHIN	07.05.2004		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>
 protectron@protectron.in



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : 1.27 FEMALE HEADER STRAIGHT, 8.50mm BASE

PART NO: P943XDXXX4-2X

1st X=1=SINGLE ROW/B=DOUBLE ROW
2nd XXX=NO. OF CONTACTS(6-40NOS)
3rd X=TYPE OF PLATING

ORDERING INFORMATION

P943XDXXX4-2X

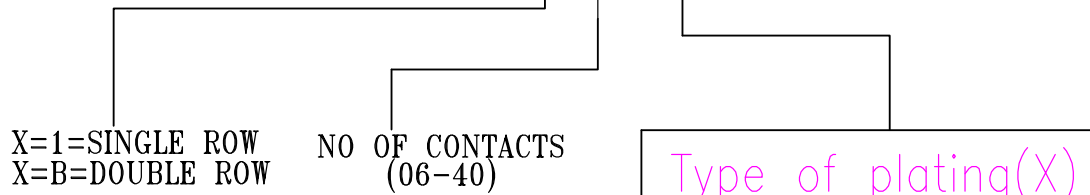

X=1=SINGLE ROW
X=B=DOUBLE ROW

NO OF CONTACTS
(06-40)

Type of plating(X)	
1	Gold Plating
2	0.75µ Gold
3	Gold on contact side & Tin on solder side
4	5µ Tin

MATES WITH

P9131,P9132
P9136

MOQ- ----

SPQ- ----