




# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm BOX HEADER, DUAL ROW, SURFACE MOUNT

PART NO:P9605-XX-15-1  
XX=NO. OF CONTACTS(6-64)

RoHS

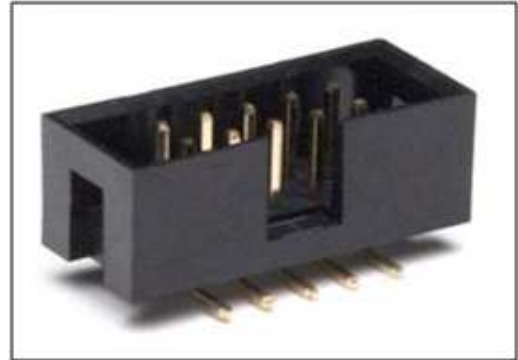

## PHYSICAL

### INSULATION

MATERIAL	:	GLASS FILLED POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

### CONTACT

MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

## ELECTRICAL

CURRENT RATING	:	3A
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1000V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX

## ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	260°C / 5 sec.



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm BOX HEADER, DUAL ROW, SURFACE MOUNT

PART NO: P9605-XX-15-1  
XX=NO. OF CONTACTS(6-64)

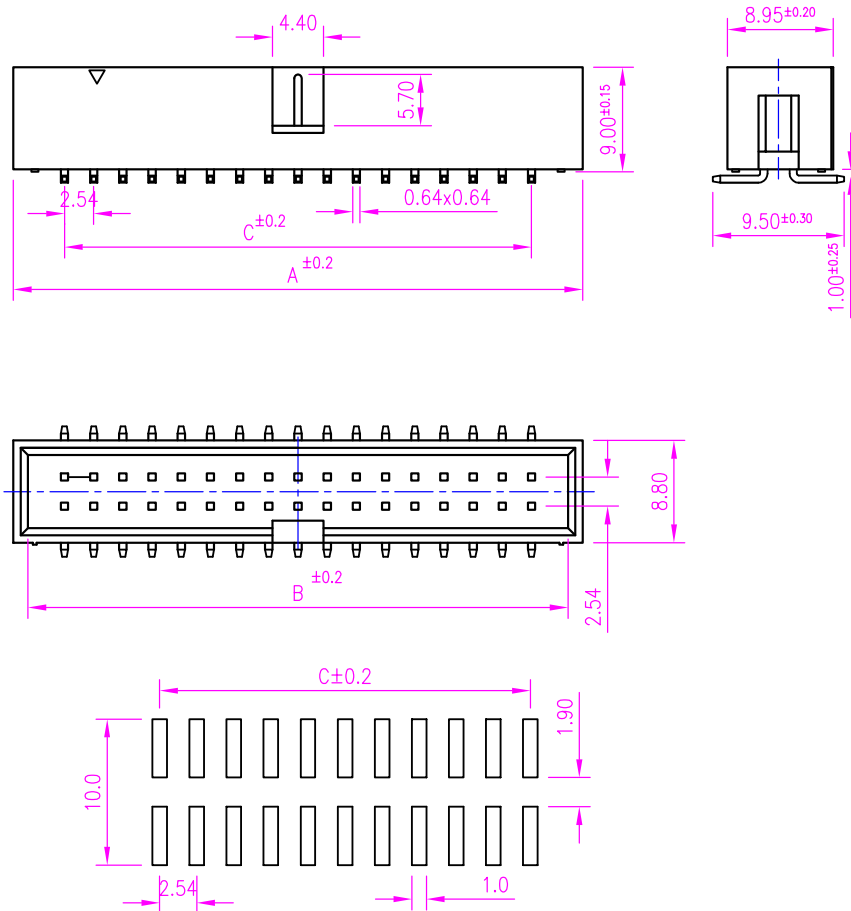

A	ORIGINAL	CHAITRA	19.03.2008			
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	

<http://www.protectron.in>  
protectron@protectron.in



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm BOX HEADER, DUAL ROW, SURFACE MOUNT

PART NO:P9605-XX-15-1  
XX=NO. OF CONTACTS(6-64)

No. OF CONTACTS	A	B	C
6	15.24	12.90	5.08
8	17.90	15.44	7.62
10	20.30	18.00	10.16
12	22.98	20.52	12.70
14	25.40	23.09	15.24
16	27.95	25.65	17.78
20	33.05	30.75	22.85
24	38.15	35.85	27.94
26	40.65	38.35	30.48
30	45.70	43.45	35.56
34	50.80	48.50	40.64
40	58.40	56.15	48.26
44	63.85	61.39	53.34
50	71.12	68.80	60.96
60	83.85	81.50	73.66
64	88.90	86.60	78.74

### MATES WITH

P9703,P9704,P9403  
P9404,P9403IDS

### ORDERING INFORMATION

P9605-XX-15-1

NO OF CONTACTS  
(6-64)

MOQ- ----

SPQ- ----