




# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27X1.27mm BOX HEADER, DUAL ROW  
STRAIGHT

PART NO:P9633-XXX-35-1  
XXX=NO. OF CONTACTS

RoHS

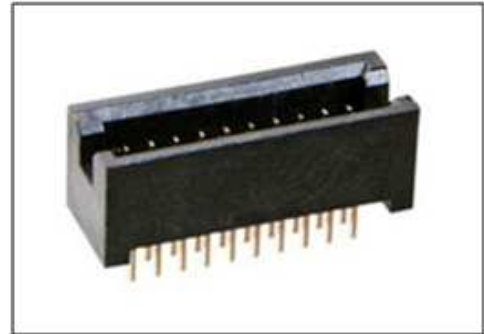

## PHYSICAL

### INSULATION

MATERIAL : POLYESTER  
FLAMMABILITY : UL94V-0/NYLON 6T  
COLOR : BLACK

### CONTACT

MATERIAL : COPPER ALLOY  
SOLDER TAILS : GOLD PLATED  
PACKAGING TYPE : TUBE/TRAY

## ELECTRICAL

CURRENT RATING : 1A  
INSULATION RESISTANCE : 1000M OHMS MIN  
DIELECTRIC WITHSTANDING : 300V AC  
CONTACT RESISTANCE : 10m OHMS MAX

## ENVIRONMENTAL DATA





TEMPERATURE RANGE : -40°C TO +105°C  
PROCESS RATING : 260°C for 5secs



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27X1.27mm BOX HEADER, DUAL ROW  
STRAIGHT

PART NO:P9633-XXX-35-1  
XXX=NO. OF CONTACTS

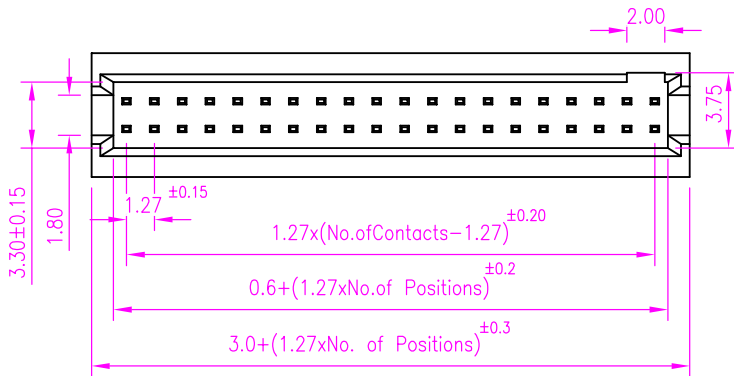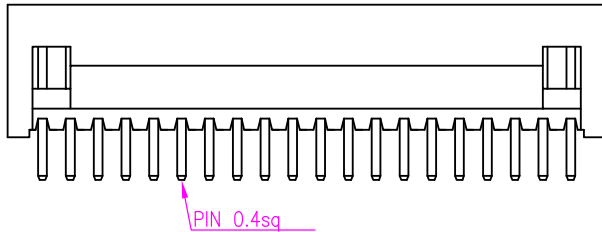

RECOMMENDED P.C.B. LAYOUT  
(PCB TOLERANCE ±0.05)

MATES WITH

P9433,P9435

## ORDERING INFORMATION

P9633-XXX-35-1


NO OF CONTACTS  
(6-100)

MOQ- ----

SPQ- ----

REV.	A1	DRAWING IS REVISED	ANIL	23.01.2009		
	A	ORIGINAL	SACHIN	17.01.2004		
		DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.  
IF NOT OTHERWISE SPECIFIED.