



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PITCH BOX HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO: P9634-XXX-35-X
XXX=NO. OF CONTACTS(6-100)
X=TYPE OF PLATING

RoHS



PHYSICAL

INSULATION

MATERIAL	:	POLYESTER
FLAMMABILITY	:	UL94V-0
COLOR	:	BLACK

CONTACT

MATERIAL	:	COPPER ALLOY
SOLDER TAILS	:	REFER TABLE
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	5000M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC/MIN
CONTACT RESISTANCE	:	20m OHMS MAX

ENVIRONMENTAL DATA





TEMPERATURE RANGE	:	-40°C TO +105°C
PROCESS RATING	:	260°C for 5secs



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PITCH BOX HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO: P9634-XXX-35-X
XXX=NO. OF CONTACTS(6-100)
X=TYPE OF PLATING

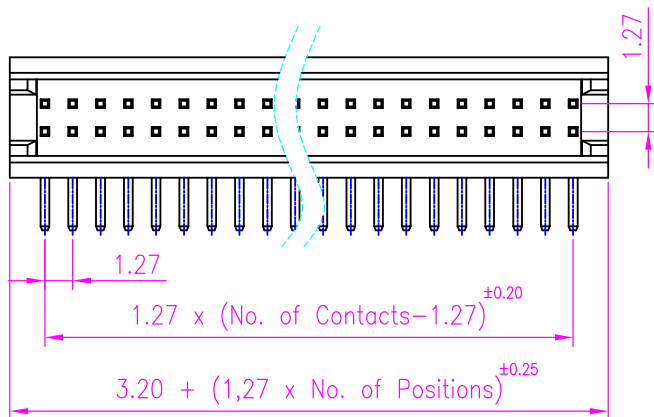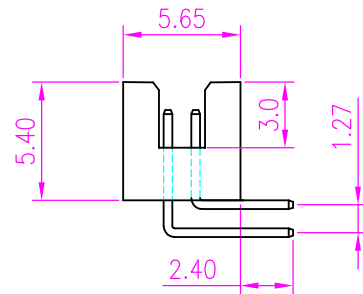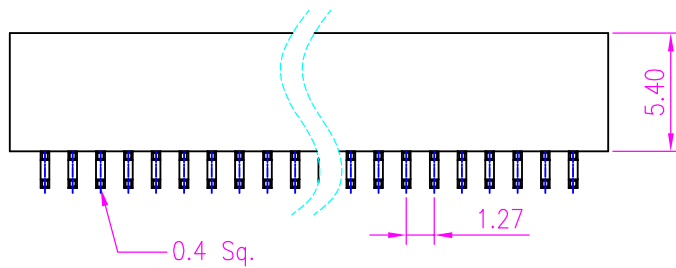

RECOMMENDED PCB LAYOUT

A	ORIGINAL	DESCRIPTION		SANDHYA	03.11.2006		
REV.				DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 1.27x1.27mm PITCH BOX HEADER, DOUBLE ROW,
RIGHT ANGLE

PART NO:P9634-XXX-35-X
XXX=NO. OF CONTACTS(6-100)
X=TYPE OF PLATING

ORDERING INFORMATION

P9634-XXX-35-X

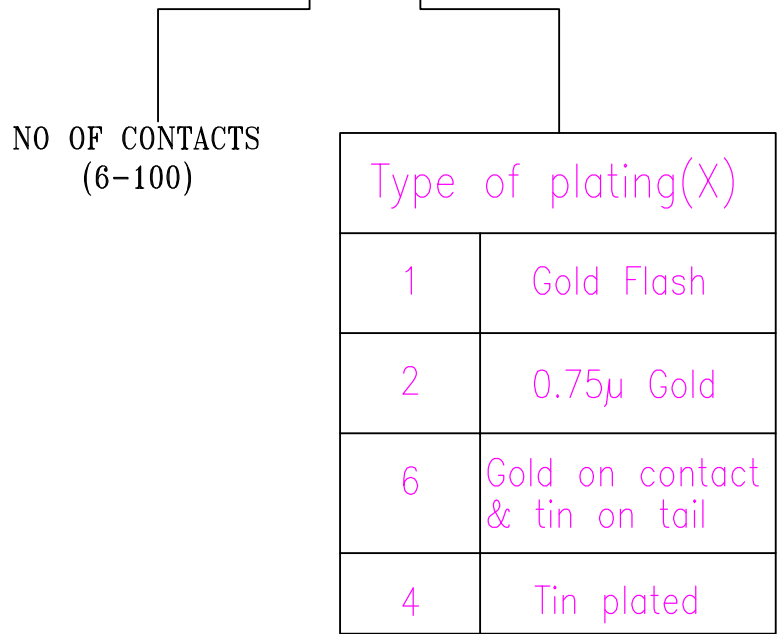

MATES WITH
P9433,P9435

MOQ- ----
SPQ- ----