




PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : FEMALE HEADER 2.54MM TO SUIT BOX HEADER,
STRAIGHT**

PART NO: P9703-XX-21
XX=NO OF CONTACTS(8-40)

RoHS

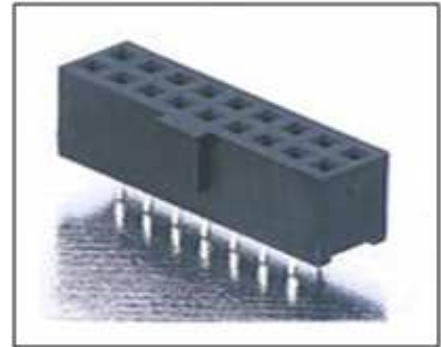

PHYSICAL

INSULATION

MATERIAL : POLYESTER
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : BRASS
CONTACT PLATING : GOLD PLATED
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
CONTACT RESISTANCE : 20m OHMS MAX
DIELECTRIC VOLTAGE : 1000V AC/MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : FEMALE HEADER 2.54MM TO SUIT BOX HEADER, STRAIGHT

PART NO: P9703-XX-21
XX=NO OF CONTACTS(8-40)

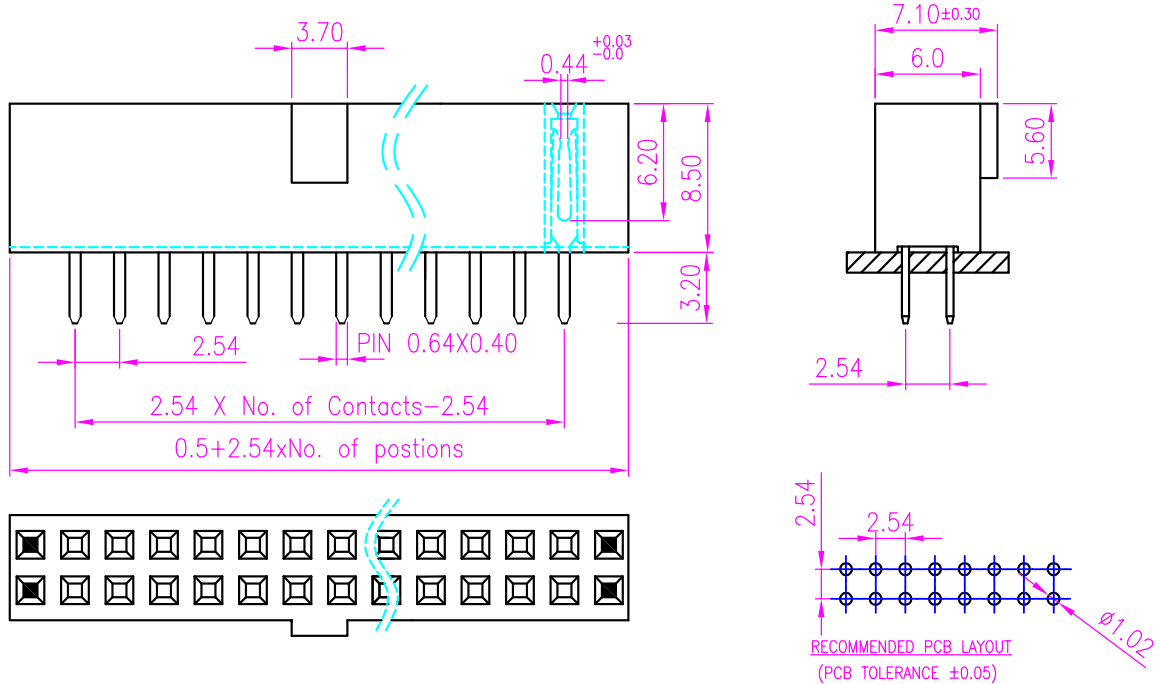

MATES WITH

P9103, P9104
P9603, P9604
P9605

ORDERING INFORMATION


P9703-XX-21

NO OF CONTACTS
(8-40)

MOQ- ----
SPQ- ----

A2	TOLERANCE REVISED	CHETAN	27.06.2011		
A1	S/T & R/A IS SEPARATED, PIN DIM CHANGED TO 0.64X0.4mm	SACHIN	03.05.2003		
A	ORIGINAL	SAMSON	22.02.2003		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.3mm
±1°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.