




PROTECTRON ELECTROMECH (P) LTD

**DESCRIPTION : 2.00mm pitch(0.079") Female Header with
Polarisation Pad, Profile=4mm**

PART NO: P9713-XX-XX

1st XX=NO. OF CONTACTS
2nd XX=PLATING

RoHS

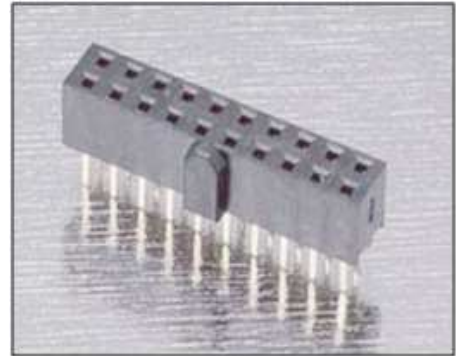

PHYSICAL

INSULATION

MATERIAL : POLYESTER
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : PHOSPHOR BRONZE
SOLDER TAILS : REFER TABLE
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 1A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC
CONTACT RESISTANCE : 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C
PROCESS RATING : 180°C FOR 5SEC




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm pitch(0.079") Female Header with Polarisation Pad, Profile=4mm

PART NO: P9713-XX-XX

1st XX=NO. OF CONTACTS
2nd XX=PLATING

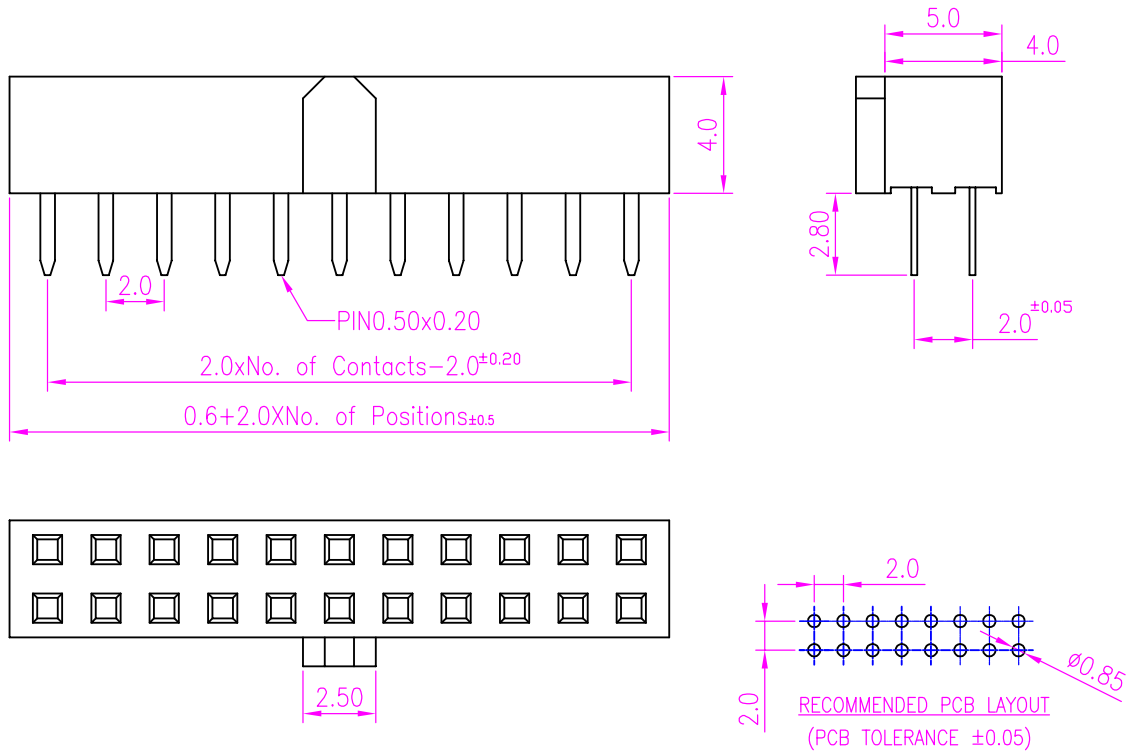

MATES WITH

P9613, P9614
P9615, P9413IDS

ORDERING INFORMATION

P9713-XX-XX
NO OF CONTACTS


| XX | PLATING |
|----|---|
| 21 | GOLD FLASH |
| 23 | GOLD FLASH ON CONTACT SIDE & TIN ON SOLDER SIDE |
| 24 | 5 μ TIN |

MOQ- ----

SPQ- ----

| | | | | | |
|------|-------------|---------|------------|------|-------------------|
| A | ORIGINAL | SANDHYA | 26.11.2005 | | |
| REV. | DESCRIPTION | | DRN. BY | DATE | CK'ED BY APP'D BY |

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.