



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :CABLE ASSEMBLY OF 2mm PITCH IDC 24way,
BOTH SIDE CRIMPED 250mm LONG

PART NO: PCA000965

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC,UL 94V-0
CONTACT : PHOSPHOR BRONZE, SELECTIVE GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 0.5 AMPS
INSULATION RESISTANCE : 1000M OHMS MIN.
CONTACT RESISTANCE : 30m OHMS MAX.
DIELECTRIC WITHSTANDING : 500V AC FOR 1MINUTE

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -55°C TO +105°C

APPLICABLE CABLE:


MATES WITH FLAT CABLE 1mm




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :CABLE ASSEMBLY OF 2mm PITCH IDC 24way,
BOTH SIDE CRIMPED 250mm LONG

PART NO: PCA000965

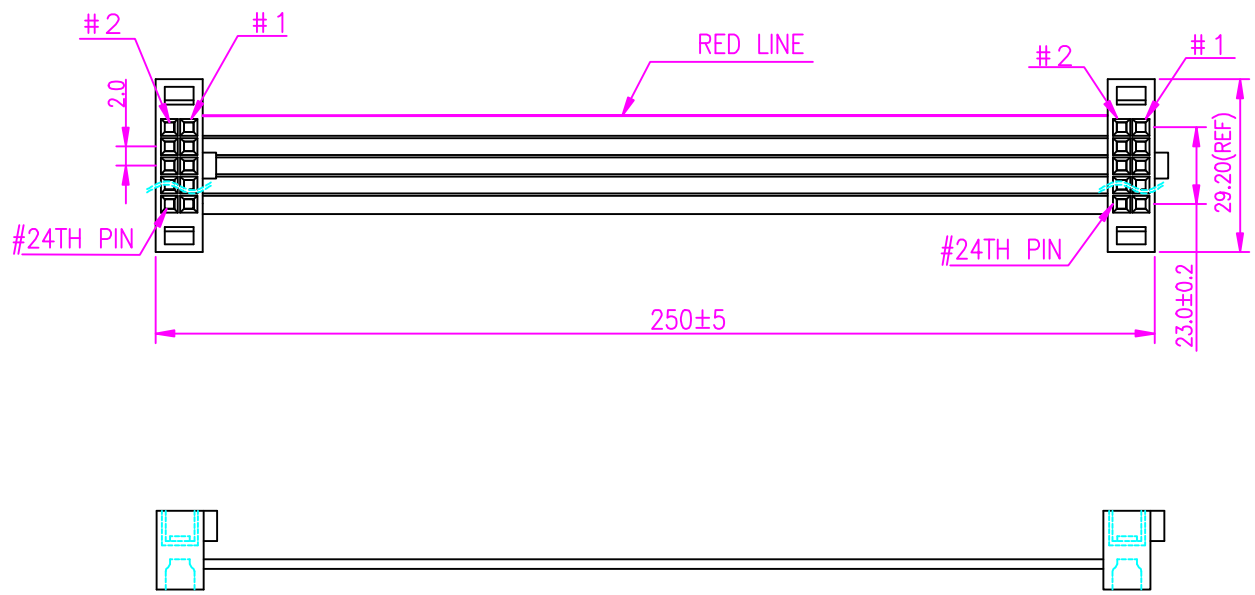

A	ORIGINAL		VISHWA.P	14.05.2013		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.3mm ±2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	