



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :CABLE ASSEMBLY OF Ø2.0mm MATING DC PLUG
TO RING TERMINALS 5000mm LONG

PART NO: PCA001982

RoHS



NOTE :

1. INSULATION RESISTANCE : 1000MΩMin
2. DIELECTRIC VOLTAGE : 500V DC FOR 1minute
3. OPERATING TEMPERATURE : -20°C ~ 85°C

IMP NOTE :

1. 22AWG AS PER UL(PVC used is as per UL spec & for this UL certification will not be supported with the supplies) TINNED COPPER STRANDS PVC CABLE,
NOMINAL AREA : 0.3255sqmm, NOMINAL OD : 0.6438mm,
RESISTANCE : 52.96Ω/Km @ 20°C, OUTER SHEATH OD : 4.5mm


OUTER JACKET ALONE IS UV PROTECTED & RoHS, INNER CORES
ARE ONLY RoHS NOT UV PROTECTED




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :CABLE ASSEMBLY OF Ø2.0mm MATING DC PLUG TO RING TERMINALS 5000mm LONG

PART NO: PCA001982

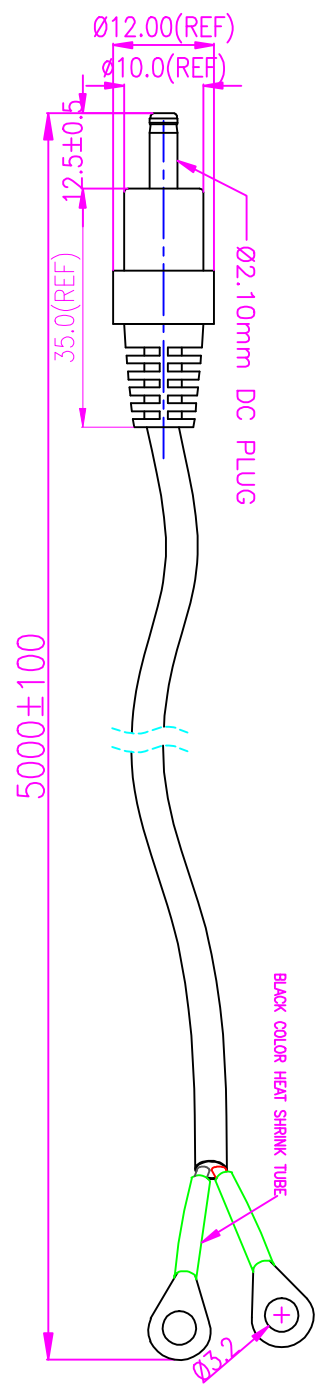

A	ORIGINAL	VISHWA.P	05.06.2013		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.1 mm $\pm 2^\circ$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	

<http://www.protectron.in>
protectron@protectron.in