



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS


PART NO: PTB141X-2.54-XXP-1X-00

1st X=PCB MOUNTING

2nd XX=NO. OF CONTACTS

3rd X=COLOR

RoHS

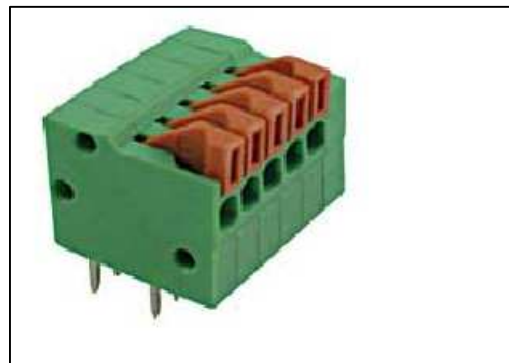

PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 2A

VOLTAGE RATING : 150V

WIRE RANGE

SOLID WIRE(AWG) : 20-26

STRANDED WIRE(AWG) : 20-26

WIRE STRIP LENGTH : 9-10mm

WITHSTANDING VOLTAGE : 1.3KV

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS

PART NO: PTB141X-2.54-XXP-1X-00
1st X=PCB MOUNTING
2nd XX=NO. OF CONTACTS
3rd X=COLOR

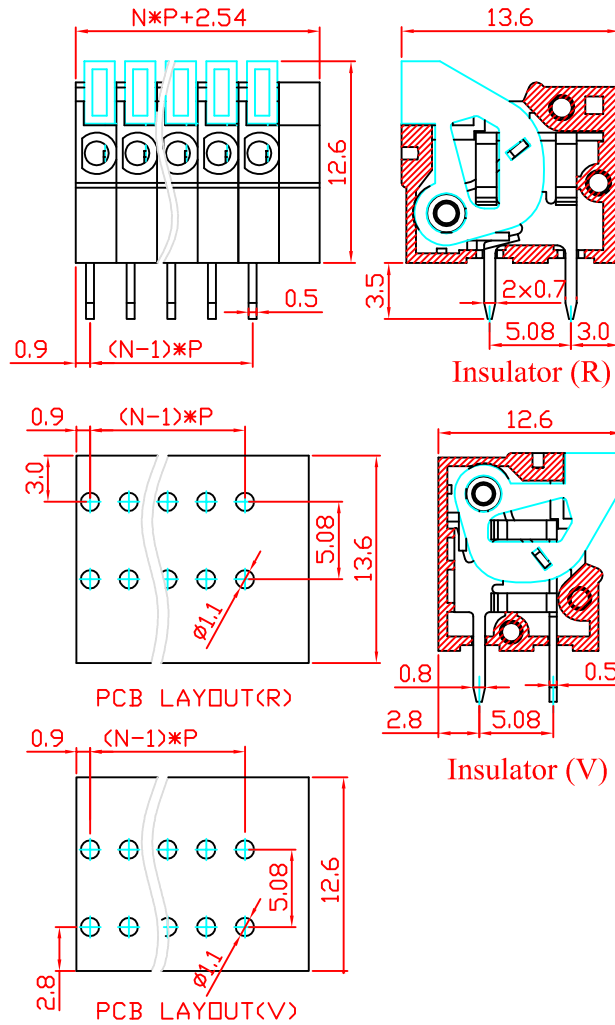

ORDERING INFORMATION

PTB141X-2.54-XXP-1X-00

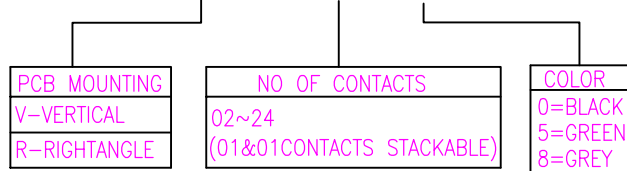

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
	Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.5 mm $\pm 0.2^{\circ}$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		