



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK HOUSING RIGHT ANGLE WITH
SIDE SCREWS

PART NO: PTB15EDGKM-XX-XXP-1X-00
1st XX=PITCH
2nd XX=NO. OF CONTACTS
3rd X=COLOR

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE : BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 10A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC VOLATGE : 1600V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 300V
WIRE RANGE : 22~12AWG

MECHANICAL DATA

TORQUE : 3.5Lb-In

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK HOUSING RIGHT ANGLE WITH
SIDE SCREWS


PART NO: PTB15EDGKM-XX-XXP-1X-00
1st XX=PITCH
2nd XX=NO. OF CONTACTS
3rd X=COLOR

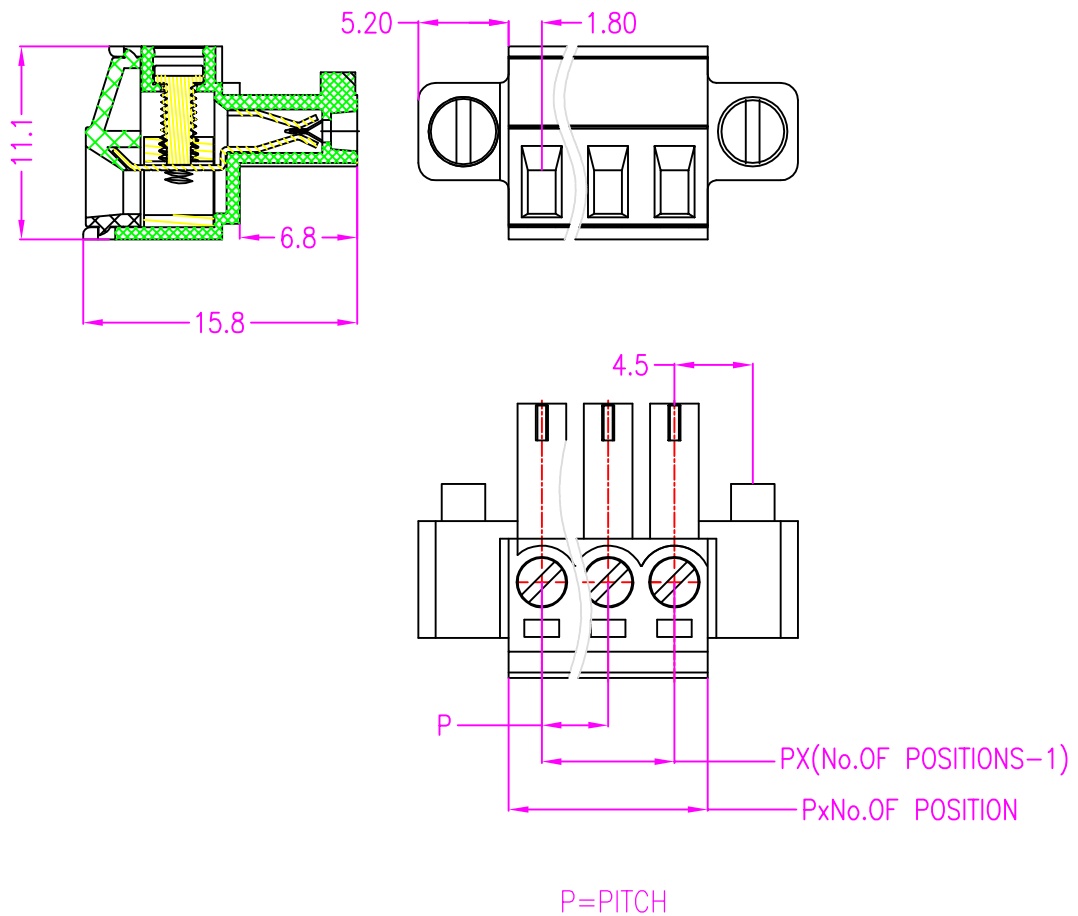

ORDERING INFORMATION

PTB15EDGKM-XX-XXP-1X-00

PITCH	NO OF CONTACTS	COLOR
3.5	02~24(PITCH 3.5/3.81)	0=BLACK
3.81	02~12(PITCH 7.0/7.62)	5=GREEN
7.0	(SOLID BLOCK)	6=BLUE
7.62		8=GREY

A	ORIGINAL				SUJATHA	22.01.2014		
REV.	D E S C R I P T I O N				DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.5mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.			
http://www.protectron.in protectron@protectron.in								
Page 2 of 2								