



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB15EDGKXM-XX-XXP-1X-00

1st X=BODY TYPE
2nd XX=PITCH
3rd XX=NO. OF CONTACTS
4th X=COLOR

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 8A

VOLTAGE RATING : 300V

WIRE RANGE

SOLID WIRE(AWG) : 16-28

STRANDED WIRE(AWG) : 16-28

TORQUE(Lb-In) : 1.7

SCREW : M2

WIRE STRIP LENGTH : 6-7mm

WITHSTANDING VOLTAGE : 1.6KV

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +105°C






PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK PLUGGABLE TYPE


PART NO: PTB15EDGKXM-XX-XXP-1X-00

1st X=BODY TYPE
 2nd XX=PITCH
 3rd XX=NO. OF CONTACTS
 4th X=COLOR

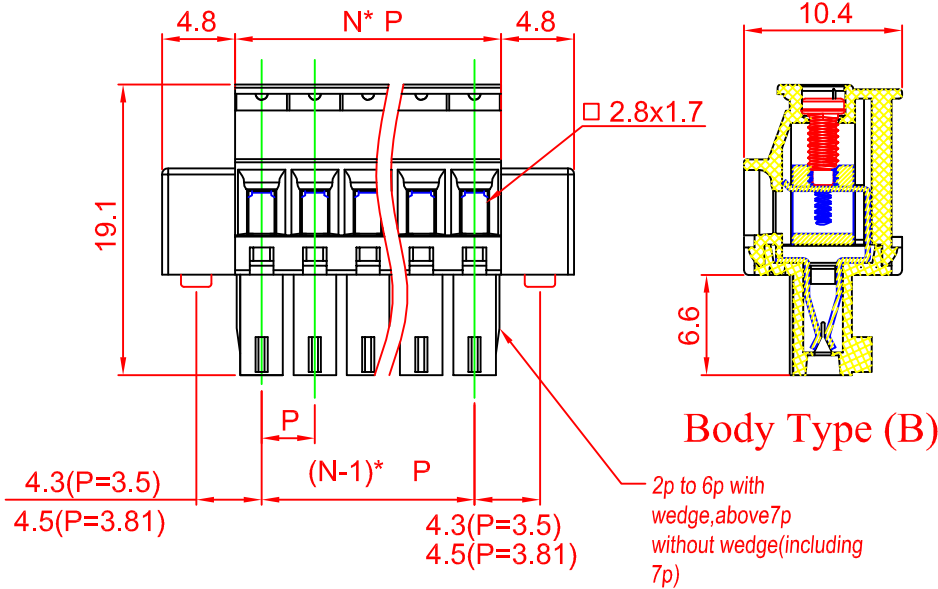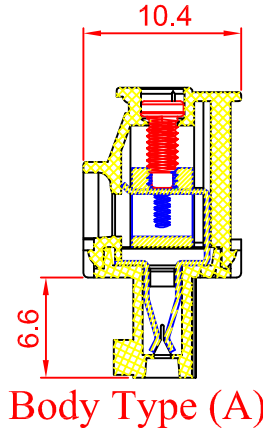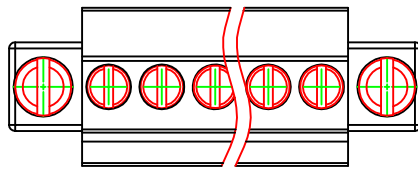

ORDERING INFORMATION

PTB15EDGKXM-XX-XXP-1X-00

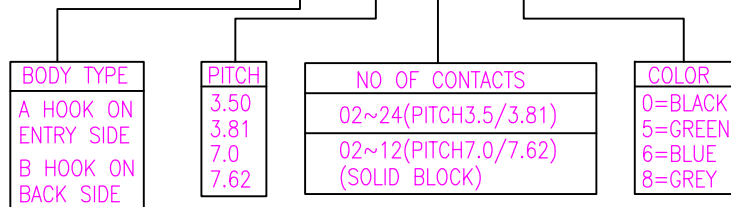

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.5mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		

<http://www.protectron.in>
 protectron@protectron.in