




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS

PART NO: PTB204X-XX-XXP-1X
1st X=CONTACT TYPE
2nd XX=PITCH
3rd XX=NO. OF CONTACTS
4th X=COLOR

RoHS

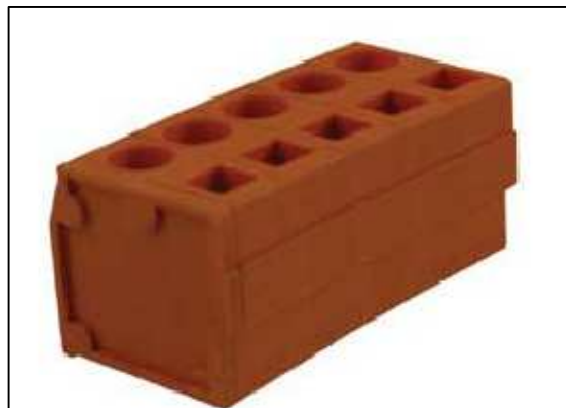

PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 8A

VOLTAGE RATING : 300V

WIRE RANGE

SOLID WIRE(AWG) : 12-28

STRANDED WIRE(AWG) : 12-28

WIRE STRIP LENGTH : 8-9mm

WITHSTANDING VOLTAGE : 1.6KV

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105°C





PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS



PART NO: PTB204X-XX-XXP-1X
 1st X=CONTACT TYPE
 2nd XX=PITCH
 3rd XX=NO. OF CONTACTS
 4th X=COLOR

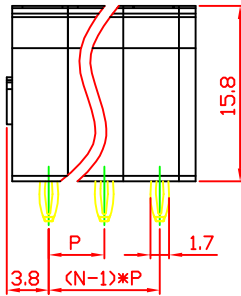


Contact type(P)

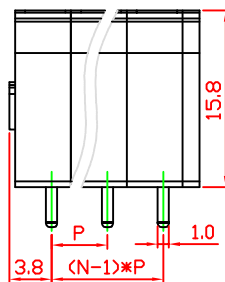

Contact type(-)




PCB LAYOUT(-)

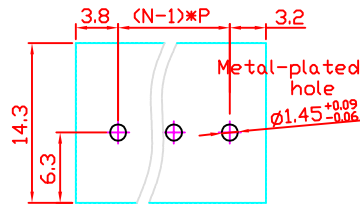

PCB LAYOUT(P)

ORDERING INFORMATION

PTB204X-XX-XXP-1X

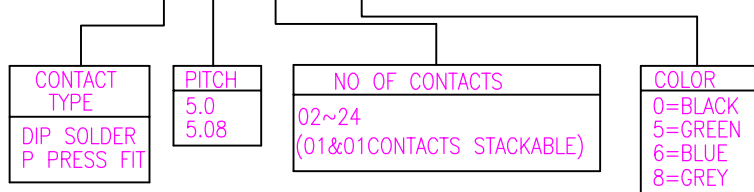

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.5mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		