



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS

PART NO: PTB240W-XX-XXP-1X

1st XX=PITCH
2nd XX=NO. OF CONTACTS
3rd X=COLOR

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 4A

VOLTAGE RATING : 150V

WIRE RANGE

SOLID WIRE(AWG) : 22-28

STRANDED WIRE(AWG) : 22-28

WIRE STRIP LENGTH : 5-6mm

WITHSTANDING VOLTAGE : 1.3KV

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK, PCB SPRING/SCREWLESS

PART NO: PTB240W-XX-XXP-1X
 1st XX=PITCH
 2nd XX=NO. OF CONTACTS
 3rd X=COLOR

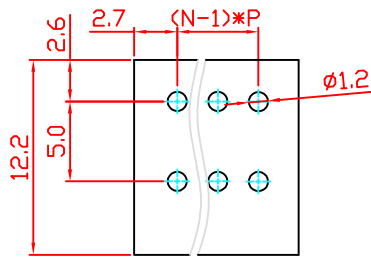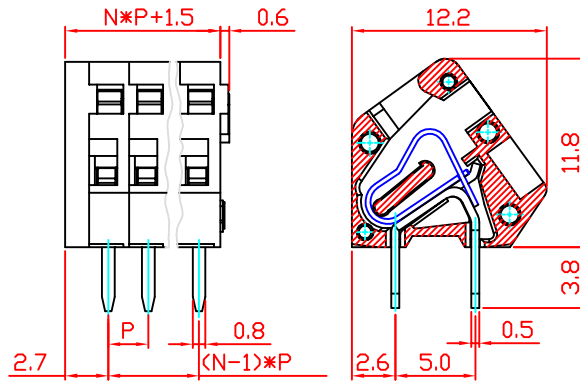

PCB LAYOUT

ORDERING INFORMATION

PTB240W-XX-XXP-1X


PITCH
2.50
2.54

NO OF CONTACTS
02~24
(01&01 CONTACTS STACKABLE)

COLOR
0=BLACK
3=ORANGE
5=GREEN
6=BLUE
8=GREY

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 0.2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.